AD 753 825

INFORMAL REPORT
NCSL 144-72

Formerly NSRDL/PC 3472

DECEMBER 1972

THE DIRECTIONAL ANALYSIS OF OCEAN WAVES: AN INTRODUCTORY DISCUSSION
(SECOND EDITION)

CARL M. BENNETT

Approved for Public Release;
Distribution Unlimited

NAVAL COASTAL SYSTEMS LABORATORY
PANAMA CITY, FLORIDA 32401

copy- 52

ABSTRACT

An introductory discussion of the mathematics behind the direc-
tional analysis of ocean waves is presented. There is sufficient
detail for a reader interested in applying the methods; further, the
report can serve as an entry into the theory. The presentation is
basically tutorial but does require a reasonably advanced mathe-
matical background. Results of a program for the measurement of
directional ocean wave bottom pressure spectra are included as an
appendix. This second edition makes corrections to the first and
adds some details of an iterative directional analysis method.

TABLE OF CONTENTS

LIST OF ILLUSTRATIONS

1. INTRODUCTION

The report presents an introductory discussion of the mathematics pertaining to the directional analysis of ocean waves. The presentation is tutorial in form but does require a reasonably complete mathematical background; a background equivalent to that required in reading Kinsman's textbook Wind Waves (1965).

The level of the presentation is moderate at the beginning. The level picks up rapidly toward the middle but there should be sufficient detail and redundancy in the mathematics to allow the reader to follow the development without having to rediscover too many omitted steps. It is in this sense that the report is tutorial. In some places the mathematical development is intuitive rather than rigorous. This is deliberate in order to provide insight and understanding. In most such cases, references to rigorous reports are given.

The development is reasonably detailed so that the interested reader may apply the methods presented and use the report as an entry point into the rigorous theory of the directional analysis of ocean waves. In this respect, if the report serves as a bridge across the gap between a handbook and a rigorous and sparse theory on the subject then the objective of the report will have been fulfilled.

The report first presents an intuitive development of a sea surface model that assumes the sea surface to be a two-dimensional random process definable in terms of a directional power spectrum. A discussion of the space and time covariance function and its relationship to the directional power spectrum follows. Both one- and two-sided power spectra are discussed; however, the main development is in terms of the two-sided spectrum. Next, the relationship between the power and cross power spectrum for two fixed locations and the sea surface directional spectrum is developed. Explicit relationships for the special cases of an isotropic sea and a single wave of a given direction and frequency are then obtained. The related topic of the directional resolving power of an array of wave transducers is then presented.

Using the preliminary developments as a basis, several methods for the directional analysis of ocean waves based on the information obtainable from an array of wave transducers are presented. The methods

are basically a direction finder technique, a least square single-wave train fit, and a Fourier-Bessel expansion fit. In conclusion, a generalized Fourier expansion method is suggested. Extensive results of the application of the least square single-wave train fit are presented in Appendix A. Appendix B is a FORTRAN II listing of a program for this analysis.

2. WAVE MODELS

In its simplest form an ocean wave can be thought of as a single frequency, sinusoidal, infinitely long crested wave of length λ, moving in time over the ocean surface from a given direction θ. Such a wave is illustrated in Figure 1.

Spatial Frequency Along v axis is zero.

$\eta(u, v, t_o)$

Spatial Frequency Along y axis is $m = K \sin \theta$

Direction of θ Wave Travel in Time t

u Spatial Frequency along u axis $K = 1/\lambda$

Water Depth h

θ

x

λ

Wave Length

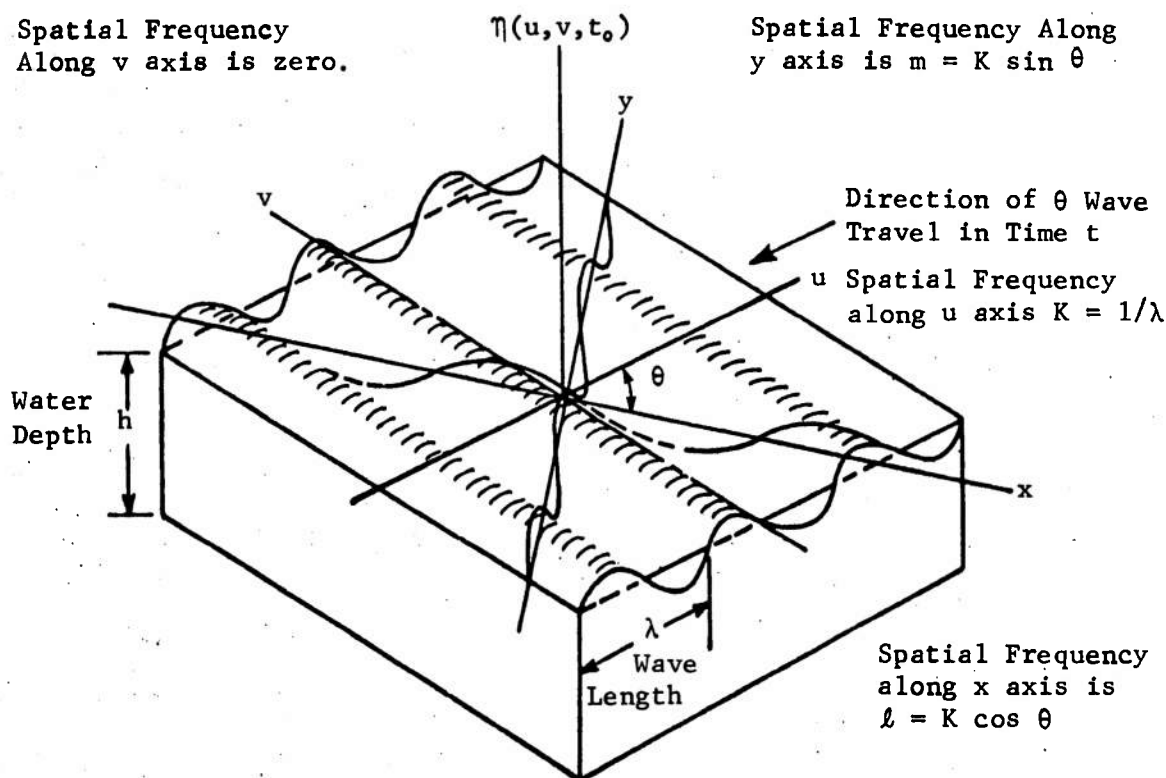Spatial Frequency along x axis is $\ell = K \cos \theta$

FIGURE 1. SIMPLE OCEAN WAVE

2

Assume that the wave is frozen in time over the surface (the x,y spacial plane). The coordinates (u,v) are a θ degree rotation of the (x,y) coordinates. The positive u axis lies along the direction from which the wave is traveling. The wave surface η(u,v), shown frozen in time in Figure 1 can be described mathematically by

$$\eta(u,v) = \cos(2\pi Ku + 2\pi\phi) \tag{2.1}$$

where $K = 1/\lambda$ is the wave number of spacial frequency in cycles per unit length along the u axis, and $2\pi\phi$ is a spacial phase shift.

To make the wave move in time across the spacial plane with a time frequency $f = 1/p$, where p is the wave period, it is necessary to add a time part to the argument of the cosine function in the model above. The time part is a phase shift dependent only upon time. As time passes, the time part changes causing the cosine wave to move across the (u,v) plane, in this case the ocean surface. Adding the time part we get (where $2\pi\psi$ is a fixed time phase shift)

$$\eta(u,v,t) = \cos(2\pi Ku + 2\pi\phi + 2\pi ft + 2\pi\psi).$$

If we combine the effect of the ϕ and ψ phase shifts as $\alpha = \phi + \psi$, we get

$$\eta(u,v,t) = \cos(2\pi(Ku + ft + \alpha)) \tag{2.2}$$

as a simple model of a sinusoidal wave moving in time over the ocean surface.

Since the coordinates (u,v) are a rotation of the coordinates (x,y) through an angle of θ degrees, we know

$$u = x \cos\theta + y \sin\theta$$
$$v = -x \sin\theta + y \cos\theta.$$

Using the above relations, and letting $\ell = k \cos\theta$ and $m = K \sin\theta$ be the spacial frequencies along the x and y axes, respectively, we have

$$\eta(x,y,t) = A \cos(2\pi(\ell x + my + ft + \alpha)) \tag{2.3}$$

as a model for a wave of height 2A moving from a direction

$$\theta = \arctan(m/\ell)$$

with a phase shift of $2\pi\alpha$. A wave crest of such a wave system is infinite in length. A crest occurs at a set of points (x,y,t) which satisfy the relation

$$\ell x + my + ft = \text{a constant} = (n - \alpha)$$

3

where n = 0, -1, +1, -2, +2, ... Each value of the index n relates to a particular crest. The intersections of the crests with the x and y axes move along the respective axes with time velocities $V_x = -f/\ell$ and $V_y = -f/m$. This follows from the differential expressions

$$D_t(x) = D_t\left[\frac{n-\alpha}{\ell} - \frac{my}{\ell} - \frac{ft}{\ell}\right] = -\frac{f}{\ell} \qquad (2.4)$$

$$D_t(y) = D_t\left[\frac{n-\alpha}{m} - \frac{\ell x}{m} - \frac{ft}{m}\right] = -\frac{f}{m} \qquad (2.5)$$

obtained from the wave crest relationship given above.

From Euler's equation we know that $\cos \gamma = (\text{Exp}(i\gamma) + \text{Exp}(-i\gamma))/2$. If we consider γ as $2\pi(\ell x + my + ft + \alpha)$ we can write

$\eta(x,y,t) = 1/2A \,\text{Exp}(i2\pi(\ell x + my + ft + \alpha) +$

$1/2A \,\text{Exp}(i2\pi(-\ell x - my - ft - \alpha)) \qquad (2.6)$

where $-\infty < \ell < +\infty$, $-\infty < m < +\infty$ and $-\infty < f < +\infty$.

In the above we have introduced the notion of negative time frequencies. This makes it possible to express an elementary wave in the mathematically convenient form

$\eta(x,y,t) = a \,\text{Exp}(i2\pi(\ell x + my + ft + \alpha)) \qquad (2.7)$

where $a = 1/2A$. In the real world a complex wave of this type implies the existence of another wave $\eta*(x,y,t)$ which is the complex conjugate of $\eta(x,y,t)$ above. This complex conjugate is given by

$\eta*(x,y,t) = a \,\text{Exp}(-i2\pi(\ell x + my + ft + \alpha))$

$= a \,\text{Exp}(i2\pi[(-\ell)x + (-m)y + (-f)t + (-\alpha)]). \qquad (2.8)$

The fact that negative frequencies are considered is explicit in the above relation.

A property of the above model, which will be used later in connection with the directional analysis of waves from measurements obtained from an array of detectors, is expressed by the equation for the phase difference of two measurements made at two different points in space and time. Assume we know the value of $\eta(x,y,t)$ at the three-dimensional coordinates (x_o,y_o,t_o) and (x_o+X, y_o+Y, t_o+T), where X, Y, and T are constants. The phases at the two points are given by

4

$$\phi(x_o, y_o, t_o) = \ell x_o + m y_o + f t_o + \alpha, \tag{2.9}$$

$$\phi(x_o + X, y_o + Y, t_o + T) = \ell(x_o + X) + m(y_o + Y) + f(t_o + T) + \alpha \tag{2.10}$$

This gives a phase difference of

$$\Delta\phi = (\ell X + mY + fT). \tag{2.11}$$

To obtain a more complicated wave system consisting of many waves of various frequencies and directions, we can linearly superimpose (add up) many waves of the form given above. If we do this, we can write

$$\eta(x, y, t) = \sum_{n=1}^{N} a_n \, Exp\left(i\, 2\pi \left(\ell_n x + m_n y + f_n t + \alpha_n\right)\right). \tag{2.12}$$

For this wave system to be real, the terms must occur in complex conjugate pairs as indicated above.

For completeness, consider a model for an infinite but countable number of distinct (discrete) waves and write

$$\eta(x, y, t) = \sum_{n=1}^{\infty} a_n \, Exp\left(i\, 2\pi \left(\ell_n x + m_n y + f_n t + \alpha_n\right)\right). \tag{2.13}$$

Again the terms must occur in complex conjugate pairs for the wave system to be real. This will be assumed to be the case in future discussions.

A model for a wave system in the case where energy exists for continuous intervals of frequency and direction should be considered. In particular, consider the general case of continuous direction from 0 to 2π radians and continuous frequency in the interval $(-f_n, + f_n)$, or even the interval $(-\infty, \infty)$. In theory the above model does not hold for the continuous case. The power spectrum for the infinite but countable case would be a set of Dirac delta functions of amplitude a_n^2 standing on the points (ℓ_n, m_n, f_n) of a three-dimensional frequency space. The continuous case produces a power spectrum, $S_o(\ell, m, f)$, which is everywhere nonnegative and in general continuous over the region of three-dimensional frequency space where power is assumed to exist. A reasonable model for $\eta(x, y, t)$ in the continuous case must be determined. Consider a single wave element

$$a_n \, Exp(i2\pi(\ell_n x + m_n y + f_n t + \alpha_n)). \tag{2.14}$$

5

The energy or mean square in this element is a_n^2. Assume the element is a part of a continuum of elements for $-\infty < f < +\infty$ and $0 \leq \theta < 2\pi$. In this case a_n^2 must be an infinitesimal energy associated with the frequency differential, df, and space frequency differentials, $d\ell$, and dm, which are related to the direction θ of the wave element as before. Let the power spectrum, $S(\ell,m,f)$, be defined with units of amplitude squared and divided by unit spacial frequency, ℓ, unit spacial frequency, m, and unit time frequency, f. The power spectrum is then a spectral density value at (ℓ,m,f). In this case we must have the infinitesimal energy, a_n^2, defined by

$$a_n^2 = S(\ell_n, m_n, f_n)\, d\ell\, dm\, df \tag{2.15}$$

The real valued, nonnegative function $S(\ell,m,f)$ is a power (energy density) spectrum of the standard type in three-dimensional frequency space (ℓ,m,f). Intuitively, we can write an infinitesimal wave element as

$$\left[\mathrm{Exp}\left(i\, 2\pi \left(\ell_n x + m_n y + f_n t + \alpha_n \right) \right) \right] \sqrt{S(\ell_n, m_n, f_n)\, d\ell\, dm\, df}\,, \tag{2.16}$$

where the positive square root is assumed. To arrive at a model of $\eta(x,y,t)$ for the continuous case, we need only form a triple "sum" of the infinitesimals or, to be precise, the triple integral $\eta(x,y,t) =$

$$\int_{-\infty}^{\infty}\int_{-\infty}^{\infty}\int_{-\infty}^{\infty} \mathrm{Exp}\left(i\, 2\pi \left(\ell x + m y + f t + \alpha(\ell,m,f) \right) \right) \sqrt{S(\ell,m,f)\, d\ell\, dm\, df} \tag{2.17}$$

For different sets of values of the phase relation $\alpha(\ell,m,f)$, the wave system, $\eta(x,y,t)$, has a different shape, even when $S(\ell,m,f)$ is fixed. In fact there is a wide range of possible shapes of $\eta(x,y,t)$ for a given $S(\ell,m,f)$. The above development is more intuitive than mathematically rigorous. It has been shown by Pierson (1955 - pp. 126-129) that if $2\pi\alpha(\ell,m,f)$ is a random function such that for fixed (ℓ,m,f) phase values of the form $2\pi\alpha$ MOD 2π between 0 and 2π, are equally probable and all phase values are independent, then Equation (2.17) represents an ensemble (collection of all probable) $\eta(x,y,t)$ for a given $S(\ell,m,f)$. The random process represented by the ensemble is then a stationary Gaussian process indexed by the three dimensions (x,y,t). Detail discussions of the above can be found in St. Dennis and Pierson (1953 - pp. 289-386) and Kinsman (1965 - pp. 368-386). The fact that a particular sea-way can be considered as a realization of a stationary three-dimensional Gaussian process has been verified. Refer to Pierson and Marks (1952).

The model in Equation (2.17) as a stationary random process will be assumed in following discussion.

3. A DIRECTIONAL WAVE SPECTRUM

The power spectrum $S(\ell,m,f)$ is the directional wave spectrum of $\eta(x,y,t)$. If $\eta(x,y,t)$ is to be real, every infinitesimal of the form given in the continuous case above presumes the existence of its complex conjugate. Let us consider the one-sided power spectral density, $S'(\ell_o,m_o,f_o)$, of a single real wave where $0 \leq f_o < \infty$. For such a real wave element of length λ_o, from a direction θ_o, $0 \leq \theta_o < 2\pi$, the value $S'(\ell_o,m_o,f_o)$, $= S(\ell_o,m_o,f_o) + S(-\ell_o,-m_o,-f_o)$, where $\ell_o = K_o \cos \theta_o$, $m_o = K_o \sin\theta_o$, and $K_o = 1/\lambda_o$. If the above real wave came from a direction $(2\pi - \theta)$, the power density would be $S'(\ell_o,-m_o,f_o) = S(\ell_o,-m_o,f_o) + S(-\ell_o,m_o,-f_o)$.

Figure 2 illustrates a real wave of length λ_o, from a direction θ_o, in two-dimensional spacial frequency (wave number) space.
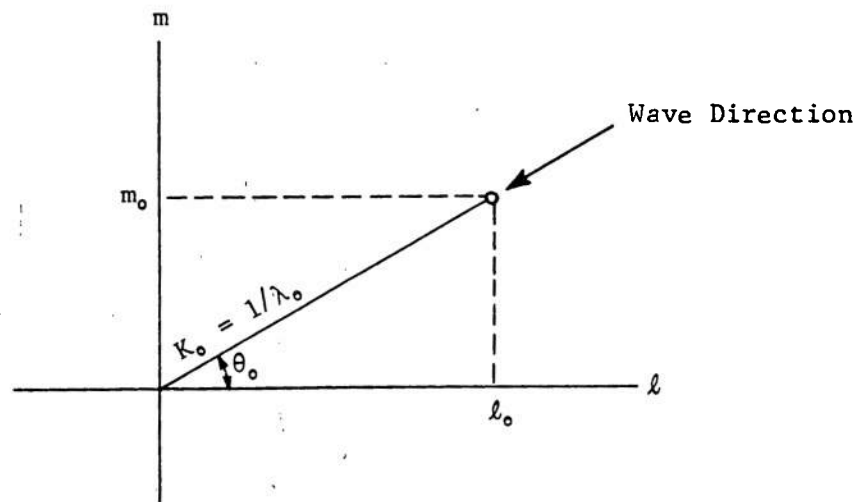
FIGURE 2. REAL WAVE IN WAVE NUMBER SPACE

If the wave number relation

$$K = 2\pi f^2 / g \, \text{Tanh} \, (2\pi K h)$$

(3.1)

holds, refer to Kinsman (1965 – p. 157) and Munk et al (1963 – p. 527), where h = water depth, g = acceleration of gravity, and K = wave number = $1/\lambda$, λ being the wave length; then a relationship between f and (ℓ,m) is implied that requires a wave frequency f_o to have a unique wave number k_o. From this we have the general one-sided spectral form for waves where $f = f_o$ of

$$S'(\ell,m,f_o) = \begin{cases} \text{zero where } \ell^2 + m^2 \neq K_o{}^2 \\ \text{a power density} \geq 0 \text{ for } \ell^2 + M^2 = K_o{}^2. \end{cases}$$

$S'(\ell,m,f_o)$ thus defines power density at $f = f_o$ for wave energy over $0 \leq \theta < 2\pi$. Figure 3 illustrates this case in wave number space.
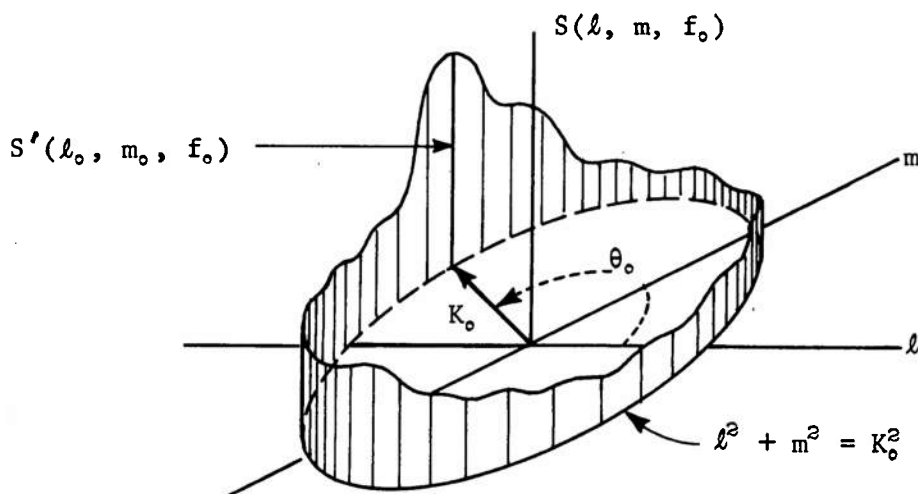
FIGURE 3.   DIRECTIONAL WAVE SPECTRUM AT A FIXED FREQUENCY, f_o

We want to estimate the shape of $S'(\ell,m,f_o)$ above the circle $\ell^2 + m^2 = K_o{}^2$ in a directional wave train analysis. Remember, the $S'(\ell,m,f_o)$ above is restricted to $f_o \geq 0$ and is, in fact, equal to

where

$$[\, S(\ell,m,f_o) \;+\; S(-\ell,-m,-f_o)],$$
$$S(\ell,m,f_o) = S(-\ell,-m,-f_o)$$

$$(3.2)$$

if $\eta(x,y,t)$ is to be real.

Let us see how $S'(\ell,m,f)$ might be found: we have said that $\eta(x,y,t)$ can be assumed to be a stationary Gaussian process. One characteristic of such a process is that for fixed values (x_o, y_o, t_o) of the process indices, $\eta(x_o, y_o, t_o)$ is random variable with a Gaussian distribution; i.e.,

$$\text{Prob}\,(\eta(x_o,y_o,t_o) < \eta_o) = \int_{-\infty}^{\eta_o} \frac{1}{\sigma\sqrt{2\pi}}\, e^{\pm\left(\frac{\eta-\mu}{\sigma}\right)^2}\, d\eta$$

8

where μ is the arithmetic mean of η and σ^2 is the variance. Intuitively η is as likely to be positive as negative, so let us assume that Prob $(\eta(x_0, y_0, t_0) < 0) = 1/2$. Since η is Gaussian distributed, and is thus symmetric about its mean, we have Prob$(\eta(x_0, y_0, t_0) < \mu) = 1/2$ or that $\mu = 0$. For σ^2, we have (using expected value notation)

$$\sigma^2 = E\left[(\eta - \mu)^2\right] = E\left[\eta^2(x_0, y_0, t_0)\right]$$

where we are thinking of η as a random variable.

A Gaussian process is completely defined statistically if we know the form of the mean

$E(\eta(x,y,t))$ and the covariances

$$E\left\{\left[\eta(x,y,t) - E(\eta(x,y,t))\right]\left[\eta(x+X, y+Y, t+T) - E(\eta(x+X, y+Y, t+T))\right]\right\},$$

where X, Y, and T are space and time separations, respectively. Refer to Parzen (1962 – pages 88–89). We have assumed $E(\eta(x,y,t)) = \mu = 0$ and that the process is stationary (only weakly stationary is necessary). Hence, by definition of weak stationarity, we have for each (x,y,t), and yet independent of the particular x,y,t values, the covariance form

$$R(X,Y,T) \equiv E\left[\eta(x,y,t)\,\eta(x+X, y+Y, t+T)\right] . \qquad (3.3)$$

All of the properties of the stationary Gaussian process $\eta(x,y,t)$ are implicit in $R(X,Y,T)$, just as a knowledge of μ and σ^2 for a single Gaussian random variable completely defines such a random variable. Here it is important to understand that we are discussing expected values across all possible realizations at a point (x,y,t); i.e., across the ensemble of all possible sea wave shapes at (x,y,t) for a given $S(\ell,m,f)$.

There is a simple and unique relationship between $R(x,y,t)$ and $S(\ell,m,f)$. Consider a single real wave element (from Equation (2.16) and (3.2)) as a random process and write $\eta(x,y,t) = [EXP(i2\pi(\ell x+my+ft+\alpha))$

$$+ Exp(-i2\pi(\ell x + my + ft + \alpha))]\sqrt{S(\ell,m,f)}\,d\ell\,dm\,df .$$

Form the covariance function

$$R(XYT) = E\left[\eta(x,y,t) \cdot \eta(x+X, y+Y, t+T)\right]$$

$$= E\left[Exp\left(i\,2\pi\left(\ell(2x+X)+m(2y+Y)+f(2t+T)+2\alpha\right)\right)\right.$$

$$+ Exp\left(-i\,2\pi\left(\ell(2x+X)+m(2y+Y)+f(2t+T)+2\alpha\right)\right)$$

$$+ Exp\left(i\,2\pi\left(\ell X + mY + fT\right)\right)$$

$$\left. + Exp\left(-i\,2\pi\left(\ell X + mY + fT\right)\right)\right] S(\ell,m,f)\,d\ell\,dm\,df$$

where E is the expected value over the ensemble for any fixed x,y,t. Note that

$$\sqrt{S(\ell,m,f)\,d\ell\,dm\,df}$$

is a constant with respect to the expected value.

Consider the following problem. Let u be a random variable with uniform probability density function

$$f(u) = \begin{cases} K & 0 \leq u < 2\pi \text{ radians} \\ 0 & \text{elsewhere} \end{cases}$$

Define a random variable $Z = e^{iu}$. The expected value of Z is defined as

$$E(Z) = \int_{-\infty}^{\infty} e^{iu} f(u)\,du$$

$$= K\int_{0}^{2\pi} e^{iu}\,du = 0$$

Considering the random variable nature of the phase $2\pi\alpha$ as described following Equation (2.17) at the end of Section 2, and applying the above notion to the cross product terms of R(X,Y,T) we obtain

$$R(XYT) = \left[Exp\left(i\,2\pi\left(\ell X + mY + fT\right)\right) +\right.$$

$$\left. Exp\left(-i\,2\pi\left(\ell X + mY + fT\right)\right)\right] S(\ell,m,f)\,d\ell\,dm\,df.$$

10

For a real wave element we have, where $S(\ell,m,f) = S(-\ell,-m,-f)$, see Equation (3.2), $R(X,Y,T) = \text{Exp}\left(i2\pi(\ell X + mY + fT)\right)S(\ell,m,f)\,d\ell\,dm\,df$

$$+ \text{Exp}\left(-i2\pi(\ell X + mY + fT)\right)S(-\ell,-m,-f)\,d\ell\,dm\,df$$

which is simply the sum of the covariance functions of two complex wave elements which are conjugate pairs. It also follows that $R(X,Y,T)$ is real valued.

Reverting to the complex wave element form, and noting that the expected ensemble value of cross products between different wave elements is zero in a manner similar to the case of cross products shown above, we obtain the composite general relationship

$$R(X,Y,T) = \iiint_{-\infty -\infty -\infty}^{\infty \infty \infty} \text{Exp}\left(i2\pi(\ell X + mY + fT)\right)S(\ell,m,f)\,d\ell\,dm\,df \quad (3.4)$$

We have demonstrated, but not rigorously proven, that the covariance function $R(X,Y,T)$ is the three-dimensional Fourier transform of the directional power spectrum $S(\ell,m,f)$.

We cannot hope to be able to estimate $R(X,Y,T)$ for continuous values of X, Y, and T. However, there is a way around this problem, we can write the above as $R(X,Y,T) =$

$$\int_{-\infty}^{\infty} \text{Exp}(i2\pi fT)\left[\iint_{-\infty -\infty}^{\infty \infty} \text{Exp}\left(i2\pi(\ell X + mY)\right)S(\ell,m,f)\,d\ell\,dm\right]df \quad (3.5)$$

which is in the form of a single dimension (variable f) Fourier transform of the term in brackets [ ]'s. Note this term is not a function of T. It depends only on the value of (X,Y). Further, by Fourier transform pairs we can write this expression as

$$[\;]_s' = \int_{-\infty}^{\infty} R(X,Y,T)\,\text{Exp}(-i2\pi fT)\,dT \quad (3.6)$$

In general, assuming that the term in [ ]'s is complex, we can write
$$[C(X,Y,f) - iQ(X,Y,f)] =$$
$$\int_{-\infty}^{\infty} R(X,Y,T)\,\text{Exp}(-i2\pi fT)\,dT \quad . \quad (3.7)$$

11

To find $[C(X,Y,f) - iQ(X,Y,f)]$ we need only know $R(X,Y,T)$ for continuous T for the given value of X,Y). Further, we have just stated that

$$[C(X,Y,f) - iQ(X,Y,f)] = [\ ]'_s = \int_{-\infty}^{\infty}\int_{-\infty}^{\infty} S(\ell,m,f)\, Exp(i2\pi(\ell X + mY))\, d\ell\, dm$$ (3.8)

This is in the form of a Fourier transform; thus, we can write from transform pairs

$$S(\ell,m,f) = \iint [C(X,Y,f) - iQ(XYf)]\, Exp(-i2\pi(\ell X + mY))\, dX\, dY$$
(3.9)

As has been stated, we cannot hope to have a continuous set of values of (X,Y). The solution is to find $R(X,Y,T)$ for continuous T and selected values of (X,Y), and then employ the above to estimate $S(\ell,m,f)$. This is described in the next section.

4. CROSS SPECTRAL MATRIX OF AN ARRAY

Let us look at $\eta(x,y,t)$ at two fixed points in space, say (x_o, y_o) and (x_1, y_1). This would give two stationary Gaussian processes indexed on time alone because (x_o, y_o) and (x_1, y_1) are fixed. Thus, we may write

$$\eta_o(t) = \eta(x_o, y_o, t) \quad and \quad \eta_1(t) = \eta(x_1, y_1, t)$$

If $X = (x_1 - x_o)$ and $Y = (y_1 - y_o)$ Then we can say, since $\eta(x,y,t)$ is assumed weakly stationary (see Equation (3.3)), that

$$R(X,Y,T) = E[\eta_o(t)\cdot \eta_1(t+T)]$$

where the expected value is over the ensemble for some specific value of t, where $-\infty < t < \infty$. Let us extend this idea by a change of notation and let N(X,Y,t) be a two-dimensional (vector) process, double-indexed on time; i.e., let N be a vector function

$$N(X,Y,t) = (\eta_o(t), \eta_1(t)) = N(t)$$
$$for\ -\infty < t < \infty$$ (4.1)

12

We can then write a generalized covariance function (assumed to be finite) as the matrix equation

$$R(T) = E\left[N^T(t) \, N(t+T)\right]$$

$$= \begin{bmatrix} E\left(\eta_0(t)\,\eta_0(t+T)\right) & E\left(\eta_0(t)\,\eta_1(t+T)\right) \\ E\left(\eta_1(t)\,\eta_0(t+T)\right) & E\left(\eta_1(t)\,\eta_1(t+T)\right) \end{bmatrix}$$

$$= \begin{bmatrix} R(0,0,T) & R(X,Y,T) \\ R(-X,-Y,T) & R(0,0,T) \end{bmatrix} \qquad (4.2)$$

Now $R(-T)$ is

$$R(-T) = \begin{bmatrix} R(0,0,-T) & R(X,Y,-T) \\ R(-X,-Y,-T) & R(0,0,-T) \end{bmatrix}$$

and $R(-T)$ transpose is

$$R^T(-T) \quad \begin{bmatrix} R(0,0,-T) & R(-X,-Y,-T) \\ R(X,Y,-T) & R(0,0,-T) \end{bmatrix} \qquad (4.3)$$

We have by Equation (3.3) and stationarity that

$$R(-X,-Y,-T) = E\left(\eta(x_1,y_1,t+T)\,\eta(x_0,y_0,t)\right)$$

$$= E\left(\eta(x_0,y_0,t)\,\eta(x_1,y_1,t+T)\right) = R(X,Y,T) \qquad (4.4)$$

It then follows that

$$R(T) = R^T(-T) \qquad (4.5)$$

13

From Equation (3.7),

let $$P^*(X,Y,f) = \left[C(X,Y,f) - i Q(X,Y,f) \right]$$

and we get

$$P^*(X,Y,f) = \int_{-\infty}^{\infty} R(X,Y,T) \, Exp(-i \, 2\pi f T) \, dT \ .$$

Now $R(-X,-Y,T) = R(X,Y,-T)$ by Equation (4.5). Thus, we have from Equation (3.4)

$$R(X,Y,-T) = \iiint_{-\infty-\infty-\infty}^{\infty\infty\infty} Exp(i \, 2\pi(\ell X + m Y + f(-T))) S(\ell,m,f) \, d\ell \, dm \, df$$

or, by the same procedure, that Equation (3.6) was obtained from Equation (3.4), we have

$$P^*(X,Y,f) = \int_{-\infty}^{\infty} R(X,Y,-T) \, Exp(i \, 2\pi f T) \, dT \qquad (4.6)$$

Now, since $R(X,Y,-T)$ is real and Fourier transform pairs are unique, we must have from Equation (4.6) that

$$\int_{-\infty}^{\infty} R(X,Y,-T) \, Exp(-i \, 2\pi f T) \, dT = P(X,Y,f)$$

a parallel form of Equation (3.6). Therefore, the Fourier transform of $R(-X,-Y,T) = R(X,Y,-T)$ is the complex conjugate of the transform of $R(X,Y,T)$; i.e., (see Equation (3.7))

$$P^*(-X,-Y,f) = \left[P^*(X,Y,f) \right]^* = P(X,Y,f)$$

In general, we have that the Fourier transform of $R(T) = R^T(-T)$ is

$$\begin{bmatrix} P(0,0,f) & P^*(X,Y,f) \\ P(X,Y,f) & P(0,0,f) \end{bmatrix} \qquad (4.7)$$

Note: $P^*(0,0,f) = P(0,0,f)$ is real.

By definition it follows that

$$C(X,Y,f) = Re[P(X,Y,f)]$$

$$Q(X,Y,f) = Im[P(X,Y,f)]$$

where $-\infty < f < \infty$.

The function $C(X,Y,f)$ is called the cospectrum and $Q(X,Y,f)$ is called the quadrature spectrum. Both are spectral density functions.

Explicitly, we can think of (x_o, y_o) and (x_1, y_1) as being the location of elements of a probe-array with space separation (X,Y).

The first step to find (or estimate) $S(\ell,m,f)$ (see Equation (3.9)) is to find $P(X,Y,f)$ related to a pair of array elements. This is a problem of estimating the cospectrum and quadrature spectrum of a two-dimensional (vector) stationary Gaussian process. Goodman (Mar 1967 – Chapter 3) has an excellent treatment of this subject, which we will discuss. Kinsman (1965 – Chapters 7-9) also discusses the subject. The essence of the problem is that if $P(X,Y,f)$ is continuous and negligible for $|f| > f_n$, then $R(X,Y,T)$ can be obtained by a time average over a particular realization $N(X,Y,t)$ instead of having to average (find the expected value) over the ensemble. This says that we can find $R(X,Y,T)$ by obtaining two time series (realizations) $r_o(t)$ and $r_1(t)$ measured over time at only two points; e.g., (x_o, y_o) and (x_1, y_1) where $(x_1 - x_o) = X$ and $(y_1 - y_o) = Y$. The relationship between $(r_o(t), r_1(t))$ and $R(X,Y,T)$ $-\infty < T < \infty$ is

$$R(X,Y,T) = \underset{t_o \to \infty}{\text{LIMIT}} \frac{1}{t_o} \int_{-t_o/2}^{t_o/2} r_o(t) \cdot r_1(t+T) \, dt \qquad (4.8)$$

where $r_o(t)$ is a realization measured over time at (x_o, y_o) and $r_1(t)$ is measured at (x_1, y_1). We can simplify the notation by an expression for a time average given by

$$R(X,Y,T) = R_{01}(T) = \overline{r_o(t)r_1(t+T)}.$$

It follows from Equation (3.7) that $C(X,Y,f) = C_{01}(f) =$

$$\int_{-\infty}^{\infty} R_{01}(T) \cos(2\pi fT) \, dt,$$

15

and

$$Q(X,Y,f) = Q_{01}(f) = \int_{-\infty}^{\infty} R_{01}(T) \, Sin(2\pi fT) \, dT. \qquad (4.9)$$

We also have (see Equations (4.2) and (4.7)) $C_{00}(f) = C_{11}(f) = P_{00}(f) = P_{11}(f)$,

$$Q_{00}(f) = Q_{11}(f) = 0;$$

$$P_{01}^{*}(f) = C_{01}(f) - i \, Q_{01}(f). \qquad (4.10)$$

The phase of $P_{01}(f)$ is given by

$$Q_{01}(f) = Arctan \, \frac{Q_{01}(f)}{C_{01}(f)} . \qquad (4.11)$$

This is the expected phase lead of the signal at (x_o, y_o) over the signal at (x_1, y_1) for f where $-\infty < f < \infty$.

For an array of N detectors located at (x_1, y_1), (x_2, y_2), (x_3, y_3) ...(x_N, y_N) we can find N^2 spectra $[P_{ij}]$ i = 1, N, j = 1, N. This gives a unique spectrum P_{ii} $(P_{11} = ... = P_{NN})$ and since $P_{ij} = P_{ji}^{*}$ (see Equation (4.6) and 4.7))

we have

$$\frac{N(N-1)}{2} \qquad (4.12)$$

unique cross spectra or a total of $[N(N-1) + 2]/2$ unique spectra. Thus, for real $\eta(x,y,t)$ we have $P_{ij}(f) = P_{ji}^{*}(f)$ and $P_{ij}(f) = P_{ij}^{*}(-f)$ allowing us to define the information about $P(X,Y,f)$ obtainable from an array by a cross spectral matrix

$$\begin{pmatrix} P_{11}(f) & C_{12}(f) & \cdots & C_{1N}(f) \\ Q_{12}(f) & P_{22}(f) & \cdots & C_{2N}(f) \\ \vdots & & \ddots & \vdots \\ Q_{1N}(f) & \cdots & & P_{NN}(f) \end{pmatrix} \quad \text{WHERE } 0 \leqslant f < \infty$$

$$(4.13)$$

16

This information can be used together with Equation (3.9) to obtain an approximation to $S(\ell,m,f)$. Numerical details for finding the spectral matrix are given in Bennett, et al (June 1964).

It should be pointed out that negative frequencies are still considered in the relationships being discussed. We do not know $P*(X,Y,f)$ for continuous values of (X,Y). We do know from the spectral matrix the values of

$$P^*(X_{ij},Y_{ij},f) \quad \text{for} \quad i = 1,\cdots,N \; ; \; j = i,\cdots,N$$

where $X_{ij} = (x_j - x_i)$

$Y_{ij} = (y_j - y_i)$.

We also have from Equation (4.7) that

$$P^*(-X_{ij},-Y_{ij},f) = P(X_{ij},Y_{ij},f) . \qquad (4.14)$$

From Equation (3.9) we get

$$S(\ell,m,f) = \int\int_{-\infty}^{\infty}\int_{-\infty}^{\infty}\left\{ P^*(X,Y,f) \cos\left[2\pi(\ell X + mY)\right] - i P^*(X,Y,f) \sin\left[2\pi(\ell X + mY)\right]\right\} dX\,dY$$

or, since $S(\ell,m,f)$ is real

$$S(\ell,m,f) = \int\int_{-\infty}^{\infty}\int_{-\infty}^{\infty}\left\{ C(XYf) \cos\left[2\pi(\ell X + mY)\right] - Q(X,Y,f)\sin\left[2\pi(\ell X + mY)\right]\right\} dX\,dY \qquad (4.15)$$

Let us consider treating the points of (X,Y) where we know $C(X,Y,f)$ and $Q(X,Y,f)$ as weighted Dirac delta functions; e.g., at (X_{12}, Y_{12}) we get

$$C(X,Y,f) = b_{12}C(X_{12},Y_{12},f)\,\delta(X-X_{12})\delta(Y-Y_{12}) .$$

Reverting to the C_{ij}, Q_{ij} notation of Equation (4.13), we have, where $X_{ji} = -X_{ij}$ and $Y_{ji} = -Y_{ij}$, $C_{ji} = C_{ij}$ and $Q_{ji} = -Q_{ij}$. The numerical form of Equation (4.15) then becomes

$$S(\ell,m,f) = b_{ii}\, C_{ii}(f) + 2 \sum_{i=1}^{N-1} \sum_{j=i+1}^{M} b_{ij} \left\{ C_{ij}(f) \cos\left[2\pi\left(\ell X_{ij} + m Y_{ij}\right)\right] \right.$$

$$\left. - Q_{ij}(f) \sin\left[2\pi\left(\ell X_{ij} + m Y_{ij}\right)\right] \right\}. \tag{4.16}$$

Choice of b_{ij} values is arbitrary. A reasonable choice is $b_{ij} = [N(N-1) + 1]^{-1}$ for all (i,j) (refer to following section). We now have a basis for an approximation of $S(\ell,m,f)$. Before exploiting this result, we need a few side results.

5. SPECIAL CROSS SPECTRAL MATRICES

Assume that we have a real sea wave of frequency $f_o > 0$ moving from direction θ_o where $\ell_o = K_o \cos\theta_o$ and $m_o = K_o \sin\theta_o$, K_o being the wave number from Equation (3.1). We can write the wave as

$$\eta(x,y,t) = A\cos(2\pi(\ell_o x + m_o y + f_o t + \alpha)) \tag{5.1}$$

Since the root-mean-square (rms) value of a cosine wave is $A/\sqrt{2}$, we have for the two-sided ($-\infty < f < \infty$) directional power spectrum of the wave in Equation (5.1)

$$S(\ell,m,f) = \frac{A^2}{4}\left[\delta(\ell-\ell_o)\delta(m-m_o)\delta(f-f_o) + \right.$$

$$\left. + \delta(\ell+\ell_o)\delta(m+m_o)\delta(f+f_o)\right] \tag{5.2}$$

or in polar form where $K = \sqrt{\ell^2 + m^2}$; $\theta = \arctan(\frac{m}{\ell})$

$$S(K,\theta,f) = \frac{A^2}{4}\left[\delta(\theta-\theta_o)\delta(f-f_o) + \right.$$

$$\left. + \delta(\theta-(\theta_o-\pi))\delta(f+f_o)\right]\delta(K-K_o)$$

18

From Equations (3.8) and (5.2) we have for a single wave of frequency $f_0 > 0$ from a direction θ_0 that the two-sided

$$P_{ij}^{*}(f) = \frac{A^2}{4}\left[\exp\left(i\,2\pi(l_0 X_{ij} + m_0 Y_{ij})\right)\delta(f - f_0) + \right.$$
$$\left. + \exp\left(i\,2\pi(-l_0 X_{ij} - m_0 Y_{ij})\right)\delta(f + f_0)\right]$$

or where $\quad P_{ij}^{*}(f) = C_{ij}(f) - i\,Q_{ij}(f)\quad$ that

$$C_{ii}(f_0) = C_{ii}(-f_0) = \frac{A^2}{4},$$

$$C_{ij}(f_0) = C_{ij}(-f_0) = \frac{A^2}{4}\cos\left(2\pi(l_0 X_{ij} + m_0 Y_{ij})\right),$$

$$Q_{ij}(f_0) = -Q_{ij}(-f_0) = -\frac{A^2}{4}\sin\left(2\pi(l_0 X_{ij} + m_0 Y_{ij})\right) \tag{5.3}$$

describe the elements for the spectral matrix of a single wave. Recall that, in general, $C_{ij}(f) = C_{ji}(f)$ and $Q_{ij}(f) = -Q_{ij}(-f)$. Substituting into Equation (4.16), we get where $b_{ij} = [N(N-1)+1]^{-1} = 1/M$ $\tag{5.4}$

and $f_0 > 0$ is assumed $\quad S(l, m, f_0) \doteq \frac{A^2}{4M}\left\{1 + \right.$

$$2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}\left[\cos\left(2\pi(l_0 X_{ij} + m_0 Y_{ij})\right)\cos\left(2\pi(l X_{ij} + m Y_{ij})\right) + \right.$$

$$\left. + \sin\left(2\pi(l_0 X_{ij} + m_0 Y_{ij})\right)\sin\left(2\pi(l X_{ij} + m Y_{ij})\right)\right] \quad \text{or}$$

$$S(l, m, f_0) \doteq$$
$$\frac{A^2}{4M}\left\{1 + 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}\cos\left(2\pi\left[X_{ij}(l - l_0) + Y_{ij}(m - m_0)\right]\right)\right\} \tag{5.5}$$

The choice of $b_{ij} = 1/M = [N(N-1)+1]^{-1}$ and observing that $\sum_{i=1}^{N-1}\sum_{j=i+1}^{N} 1 = \frac{N(N-1)}{2}$,

gives the convenient result (Note: For $-f_o < 0$ we would use $(-\ell_o, -m_o)$ in place of (ℓ_o, m_o))

$$S(\ell_o, m_o, f_o) = S(-\ell_o, -m_o, -f_o)$$

$$\doteq \frac{A^2}{4m}\left\{1 + N(N-1)\right\} = \frac{A^2}{4}$$

which agrees with the values of Equation (5.2) at the points (ℓ_o, m_o, f_o) and $(-\ell_o, -m_o, -f_o)$. Note that there is not general agreement elsewhere. In fact, Equation (4.16) may (and does) give negative values for the approximation of $S(\ell, m, f)$. This is a problem of probe array design and is directly related to the directional resolving power of a probe array. This problem is discussed later in another section.

Consider the case of a single frequency, $f_o > 0$, real sea with equal wave energy from all directions; i.e., isotropic waves. In this case, assuming the wave equation (Equation (3.1)) holds, we have

$$S(\ell, m, f) = \left[\widetilde{A}\ \delta\left((\ell^2 + m^2) - (\ell_o^2 + m_o^2)\right)\right]\left[\delta(f - f_o) + \delta(f + f_o)\right]$$

OR WHERE $K^2 = \ell^2 + m^2$, $K = +\sqrt{K^2}$, AND $\theta = \text{ARCTAN}\left(\frac{m}{\ell}\right)$

$$S(K, \theta, f) = \widetilde{A}\ \delta(K^2 - K_o^2)\left[\delta(f - f_o) + \delta(f + f_o)\right] \tag{5.6}$$

as the two-sided directional power spectrum for such an isotropic wave.

Since $\ell = K\cos\theta$ and $m = K\sin\theta$, Equation (3.8) can be expressed in polar coordinate form as

$$\overset{*}{P}_{ij}(f) = \int_{-\pi}^{\pi}\int_0^{\infty} S(K, \theta, f)\ \text{EXP}\left(i\,2\pi K\left(X_{ij}\cos\theta + Y_{ij}\sin\theta\right)\right)K\,dK\,d\theta \tag{5.7}$$

Letting $\quad D_{ij} = \left(X_{ij}^2 + Y_{ij}^2\right)$

20

and $\quad \phi_{ij} = \text{ARCTAN} \left(\dfrac{y_{ij}}{x_{ij}} \right)$

we can write

$$\overset{*}{P}_{ij}(f) = \int\limits_{-\pi}^{\pi} \int\limits_{0}^{\infty} S(K,\theta,f) \, \text{EXP} \left(i 2\pi K D_{ij} \cos(\theta - \theta_{ij}) \right) K \, dk \, d\theta \qquad (5.8)$$

Using Equation (5.6) for $S(K,\theta,f)$ we get

$$\overset{*}{P}_{ij}(f_o) = \tilde{A} K_o \int\limits_{-\pi}^{\pi} \text{EXP} \left(i 2\pi K_o D_{ij} \cos(\theta - \phi_{ij}) \right) d\theta$$

$$= \tilde{A} K_o \int\limits_{-\pi}^{\pi} \cos \left(2\pi K_o D_{ij} \cos(\theta - \phi_{ij}) \right) d\theta +$$

$$+ i \tilde{A} K_o \int\limits_{-\pi}^{\pi} \text{SIN} \left(2\pi K_o D_{ij} \cos(\theta - \phi_{ij}) \right) d\theta \qquad (5.9)$$

Now, departing from the above development, consider the following integral where

$$z = 2\pi K_o D_{ij} \; ; \; \psi = \phi_{ij}$$

$$\int\limits_{-\pi}^{\pi} \cos(n\theta) \cos(z \cos(\theta - \psi)) d\theta$$

Let $\phi = \theta - \psi$ and we get

$$\int\limits_{-\pi-\psi}^{\pi-\psi} \cos(n\phi + n\psi) \cos(z \cos\phi) d\phi$$

Expanding $\cos(n\theta + n\psi)$ we get

$$\cos n\psi \int_{-\pi-\psi}^{\pi-\psi} \cos n\phi \, \cos(z \cos \phi) \, d\phi$$

$$-\sin n\psi \int_{-\pi-\psi}^{\pi-\psi} \sin n\phi \, \cos(z \cos \phi) \, d\phi \; .$$

We have $(\pi - \psi) - (-\pi -\psi) = 2\pi$ so that the integrands are over 2π allowing us to write the above as

$$\cos n\psi \int_{-\pi}^{\pi} \cos n\phi \, \cos(z \cos \phi) \, d\phi$$

$$-\sin n\psi \int_{-\pi}^{\pi} \sin n\phi \, \cos(z \cos \phi) \, d\phi \; .$$

From Ryzhik and Gradshteyn (1965 – page 402) we have (since sine is odd and cosine is even) the result

$$\int_{-\pi}^{\pi} \cos(n\theta) \, \cos(z \cos(\theta - \psi)) \, d\theta$$

$$= \cos n\psi \left[2\pi \cos\left(\frac{n\pi}{2}\right) J_n(z) \right] \; . \tag{5.10}$$

In a similar way we get

$$\int_{-\pi}^{\pi} \cos(n\theta) \, \sin(z \cos(\theta - \psi)) \, d\theta$$

$$= \cos n\psi \left[2\pi \sin\left(\frac{n\pi}{2}\right) J_n(z) \right] \; , \tag{5.11}$$

where $J_n(Z)$ is a Bessel function of the first kind of integer order n. Returning to Equation (5.9), the above results give, for n = 0 where $f_0 > 0$, the result

$$P_{ij}(\pm f_0) = \tilde{A} \, 2\pi K_0 J_0(2\pi K_0 D_{ij}) \quad .$$

Since the above is real

$$C_{ii}(\pm f_0) = 2\pi K_0 \tilde{A}$$

$$C_{ij}(\pm f_0) = 2\pi K_0 \tilde{A} J_0(2\pi K_0 D_{ij}) \quad .$$

$$Q_{ij}(\pm f_0) = 0 \tag{5.12}$$

describe the elements for the spectral matrix of a single frequency isotropic sea.

The above two special cases for sea waves are the extremes of directionality of real sea waves of frequency $f_0 > 0$. These results will have important applications later.

6. A MEASURE OF ARRAY DIRECTIONAL RESOLVING POWER

From Equation (3.9) we have the Fourier transform

$$S(l,m,f) = \int_{-\infty}^{\infty}\int_{-\infty}^{\infty} P^*(X,Y,f) \exp(-i\,2\pi(l X + m Y))\, dX\, dY \tag{6.1}$$

In practice we use a probe array with elements at $(x_1, y_1)\ldots, (x_k, y_k)$ to obtain $P^*(X,Y,f)$ at the separation points $(0,0)$, (X_{12}, Y_{12}), $(-X_{12},-Y_{12})\ldots, (X_{k-1,k}, Y_{k-1,k})$, $(-X_{k-1,k}, -Y_{k-1,k})$.

We do not then know $P^*(X,Y,f)$ but the product

$$[P^*(X,Y,f)\, g(X,Y)] \tag{6.2}$$

where g(X,Y) is a set of Dirac delta functions standing on the separation points of the probe array and zero elsewhere.

Thus, we have the estimate

$$\hat{S}(l,m,f) = \int\int_{-\infty}^{\infty}\int^{\infty} \left[P^{*}(X,Y,f) g(X,Y) \right] \exp(-i2\pi(lX + mY)) \, dX \, dY$$

Let

$$G(l,m) = \int\int_{-\infty}^{\infty}\int^{\infty} g(X,Y) \exp(-i2\pi(lX + mY)) \, dX \, dY \qquad (6.3)$$

Using this and Equation (3.8) we have for a given (l_o, m_o, f_o) that

$$\hat{S}(l_o,m_o,f_o) = \int\int_{-\infty}^{\infty}\int^{\infty} \left[\int\int_{-\infty}^{\infty}\int^{\infty} S(l,m,f_o) \exp(i2\pi(lX + mY)) \, dl \, dm \right] g(X,Y)$$

$$\exp(-i2\pi(l_o X + m_o Y)) \, dX \, dY$$

$$= \int\int_{-\infty}^{\infty}\int^{\infty} \left[\int\int_{-\infty}^{\infty}\int^{\infty} S(l,m,f_o) g(X,Y) \exp(-i2\pi(X(l_o-l) + Y(m_o-m))) \, dX \, dY \right] dl \, dm$$

$$= \int\int_{-\infty}^{\infty} S(l,m,f_o) \left[\int\int_{-\infty}^{\infty}\int^{\infty} g(X,Y) \exp(-i2\pi(X(l_o-l) + Y(m_o-m))) \, dX \, dY \right] dl \, dm$$

$$= \int\int_{-\infty}^{\infty} S(l,m,f) \, G(l_o-l, m_o-m) \, dl \, dm$$

$$(6.4)$$

As expected, $\hat{S}(l,m,f)$ is a two-dimensional convolution of the true directional spectrum $S(l,m,f)$ with $G(l,m)$ the Fourier transform of $g(X,Y)$. We see then that $\hat{S}(l,m,f)$ is a weighted average of $S(l,m,f)$

and that $G(\ell,m)$ is a measure of the directional resolving power of the assumed probe array. By the nature of $g(X,Y)$ we have from Equation (6.3)

$$G(\ell,m) = 1 + 2 \sum_{\lambda=1}^{N-1} \sum_{j=\lambda+1}^{N} \cos\left(2\pi\left(\ell X_{ij} + m Y_{ij}\right)\right) \qquad (6.5)$$

If we assume that the wave equation (Equation (3.1)) holds, we find that $S(\ell,m,f_0)$ is zero when $\ell^2 + m^2 \neq k_0^2$, the wave number for f_0. From this we have for a given $(\ell_0 m_0)$ that the directional resolving power, DRP, is

$$DRP(\ell,m,f_0) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \delta\left(\left(\ell^2 + m^2\right) - K_0^2\right) G(\ell_0-\ell, m_0-m) \, d\ell \, dm$$

LET $\quad \ell = K_0 \cos\theta \quad , \quad m = K_0 \sin\theta$, WHICH IMPLIES $\ell^2 + m^2 = K_0$

and we get, for energy coming from a direction θ_0 at frequency f_0 as a function of $0 \leq \theta \leq 2\pi$, that

$$DRP(\theta | \theta_0, f_0) = G\left(K_0(\cos\theta_0 - \cos\theta), K_0(\sin\theta_0 - \sin\theta)\right).$$

From Equation (6.5) we get

$$DRP(\theta | \theta_0, f_0) = 1 + 2 \sum_{\lambda=1}^{N-1} \sum_{j=\lambda+1}^{N} \cos\left[2\pi\left(X_{ij} K_0(\cos\theta_0 - \cos\theta) + Y_{ij} K_0\right.\right.$$
$$\left.\left.(\sin\theta_0 - \sin\theta)\right)\right]$$

$$= 1 + 2 \sum_{\lambda=1}^{N-1} \sum_{j=\lambda+1}^{N} \cos\left[2\pi\left((\ell_0 - K_0\cos\theta)X_{ij} + (m_0 - K_0\sin\theta)Y_{ij}\right)\right]$$

NOTE THAT $DRP(\theta_0 | \theta_0, f_0) = N(N-1) + 1 \qquad (6.6)$

Compare Equation (6.6) and (5.5). Except for the amplitude term, $A^2/4M$, in Equation (5.5) the equations give identical results. The choice of $b_{ij} = [N(N-1) + 1]^{-1} = 1/M$ is again found convenient.

7. DIRECTIONAL ANALYSIS FROM THE CROSS SPECTRAL MATRIX

First, we consider a fundamental approach. We have for a pair of detectors I and J located at (x_i, y_i) and (x_j, y_j) respectively, the cross spectral matrix, $P_{ij}(f) = C_{ij}(f) + iQ_{ij}(f)$ and more importantly $\phi_{ij}(f)$ the phase lead of I over J given by,

$$\phi_{ij}(f) = \text{ARCTAN}\left[\frac{Q_{ij}(f)}{C_{ij}(f)}\right] \, . \tag{7.1}$$

The actual phase lead may differ from this value since the true phase lead θ is some one of the values

$$\phi_{ij}(f) + h\, 2\pi$$

where

$$h = 0, \pm 1, \pm 2, \cdots \, .$$

Consider a single wave of frequency f_o with corresponding wave length λ_o and wave number $K_o = 1/\lambda_o$, and find the direction the wave must travel; i.e., fit a single wave to the spectral matrix results for the detectors I and J.

Let D_{ij} be the distance between I and J. The distance between I and J in wave lengths is $K_o D_{ij}$. In radians this is $2\pi K_o D_{ij}$. From this relation we get

$$-2\pi K_o D_{ij} \leqslant \phi \leqslant 2\pi K_o D_{ij}$$

or that only values of h such that

$$-2\pi K_o D_{ij} \leqslant \phi_{ij}(f) + h\, 2\pi \leqslant 2\pi K_o D_{ij} \tag{7.2}$$

give physically acceptable candidates for the value of ϕ. If $D_{ij} < \lambda_o/2$ only one h value is valid. If $\lambda_o/2 < D_{ij} < \lambda_o$ at most two values of h are valid, etc.

The problem is how to find the true direction, θ_o, of a single wave given the above possible value(s) of ϕ. Consider a given value of ϕ in terms of wave length units and we obtain

$$L_o = \frac{\phi}{2\pi}\lambda_o = \frac{\phi}{2\pi K_o} \quad . \tag{7.3}$$

Figure 4 illustrates a case for $\phi \geq 0$ (and thus $L_O \geq 0$). From the figure we have, where the true direction is θ_0 and true phase is ϕ, that

$$\theta_o = \psi_{ij} + \frac{\pi}{2} + \alpha$$

$$\text{WHERE} \quad \sin\alpha = \frac{\phi}{2\pi K_o D_{ij}} \tag{7.4}$$

$$\text{OR} \quad \alpha = \arcsin\left[\frac{\phi}{2\pi K_o D_{ij}}\right] = \arcsin\left[\frac{L_o}{D_{ij}}\right]$$
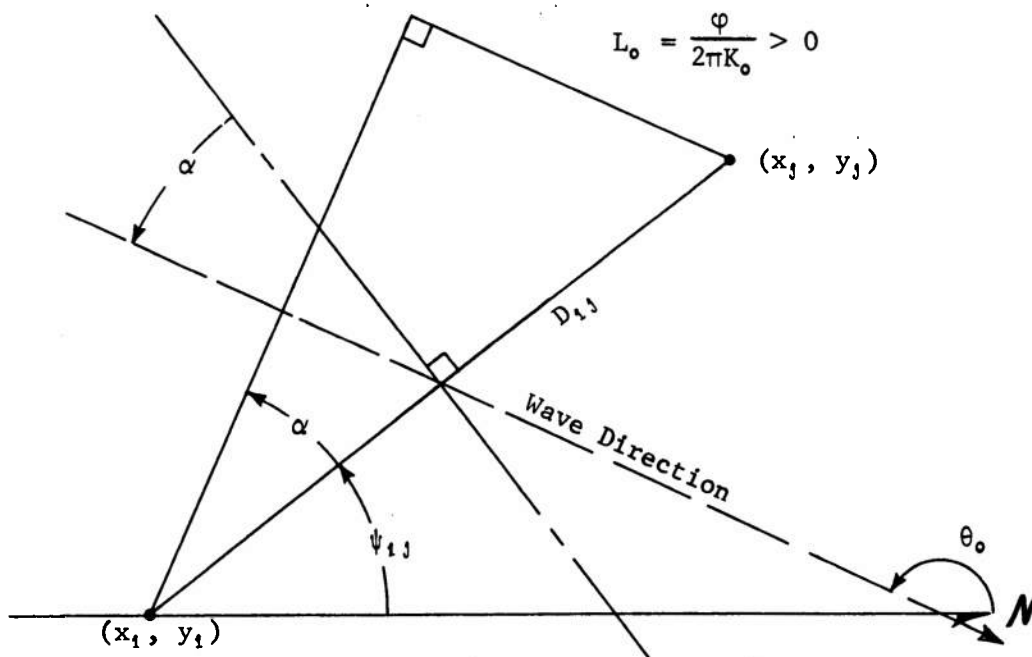
FIGURE 4. WAVE DIRECTION ANALYSIS

Recall that $\sin(\alpha) = \sin(\pm\pi-\alpha)$. Thus for a given $\phi \geq 0$ we get, since α must be obtained from an arcsin relationship, two possible values of wave direction, the true value θ_o and its image

$$\theta' = \left[\psi_{ij} + \frac{\pi}{2} \right] + \left[-\pi - \alpha \right]$$

$$= \psi_{ij} - \frac{\pi}{2} - \alpha = \psi_{ij} - \left[\frac{\pi}{2} + \alpha \right] \tag{7.5}$$

This is illustrated in Figure 5. In actual practice we do not know the true direction, thus a given value of $\phi \geq 0$ gives the direction as

$$\theta_o = \psi_{ij} \pm \left[\frac{\pi}{2} + \alpha \right]$$

where $0 \leq \alpha \leq \pi/2$ is obtained from the principle value of the arcsin. If $\phi < 0$, then I actually lags J by $|\phi| > 0$ and $L_o' = L_o/D_{ij} < 0$, so that arcsin (L_o') gives $-\pi/2 \leq \alpha < 0$.
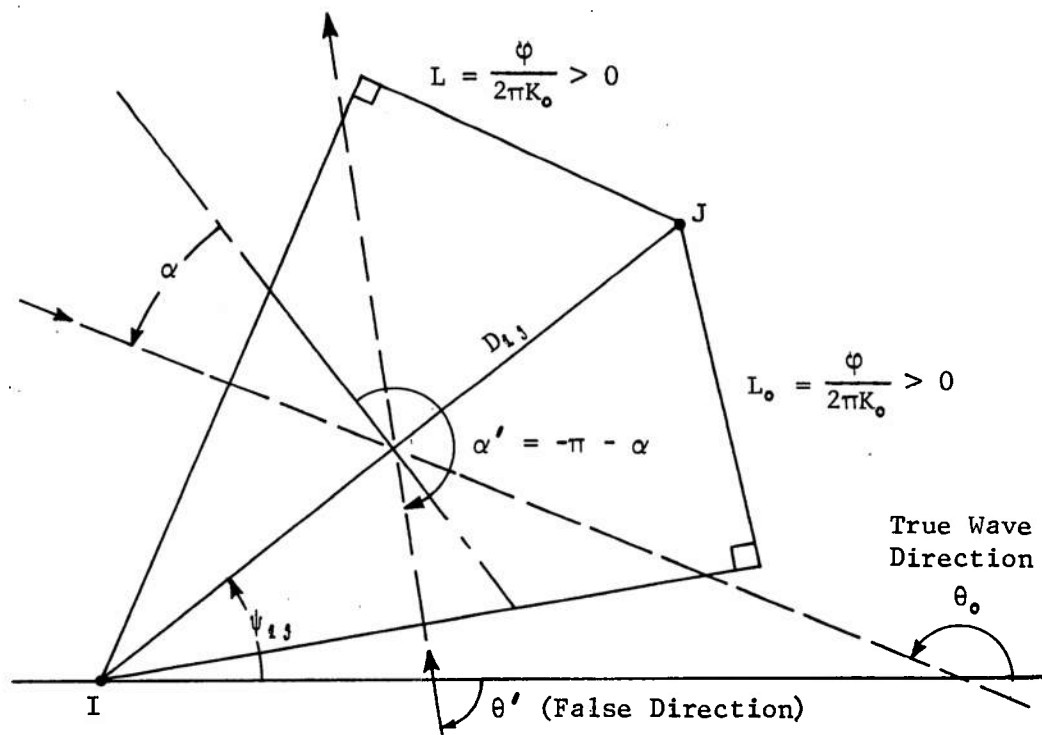
FIGURE 5. DIRECTION ANALYSIS FROM A PAIR OF ARRAY ELEMENTS

28

The implied directions, for $\phi < 0$, are directly opposite from those for $\phi \geq 0$ so that for a given value of $\phi \leq 0$ we get directions ($\alpha < 0$)

and
$$\theta_\circ = \psi_{ij} - \frac{\pi}{2} - \alpha$$

or
$$\theta_\circ = \psi_{ij} + \frac{\pi}{2} + \alpha$$

$$\theta = \psi_{ij} \pm \left[\frac{\pi}{2} + \alpha\right]$$

as before.

Thus, where the principle value of arcsin is assumed, we get a set of possible directions

$$\theta_{\circ_h} = \psi_{ij} \pm \left[\frac{\pi}{2} + \alpha_h\right]$$

where

$$\alpha_h = ARCSIN\left[\frac{\phi_{ij}(f) + h\, 2\pi}{2\pi\, K_\circ\, D_{ij}}\right] \tag{7.6}$$

h being constrained by

$$\left|\frac{\phi_{ij}(f) + h\, 2\pi}{2\pi\, K_\circ\, D_{ij}}\right| \leq 1 \quad .$$

An example of this type analysis, for an array pair, is illustrated in Figure 6. Thus several estimates of θ_0 are available (at least two).

The estimates of true direction, θ_0, often vary from one array element pair to another, making the selection of a true θ_0 value difficult. The selection is also hindered because half of the estimates of θ_0 are of the image type; i.e., false estimates.

While the above directional method leaves something to be desired, it does illustrate the basic directional information produced by an array of detectors.

A better method, suggested in Munk et al (April 1963), of using the spectral matrix directional information to fit a single wave at each

29
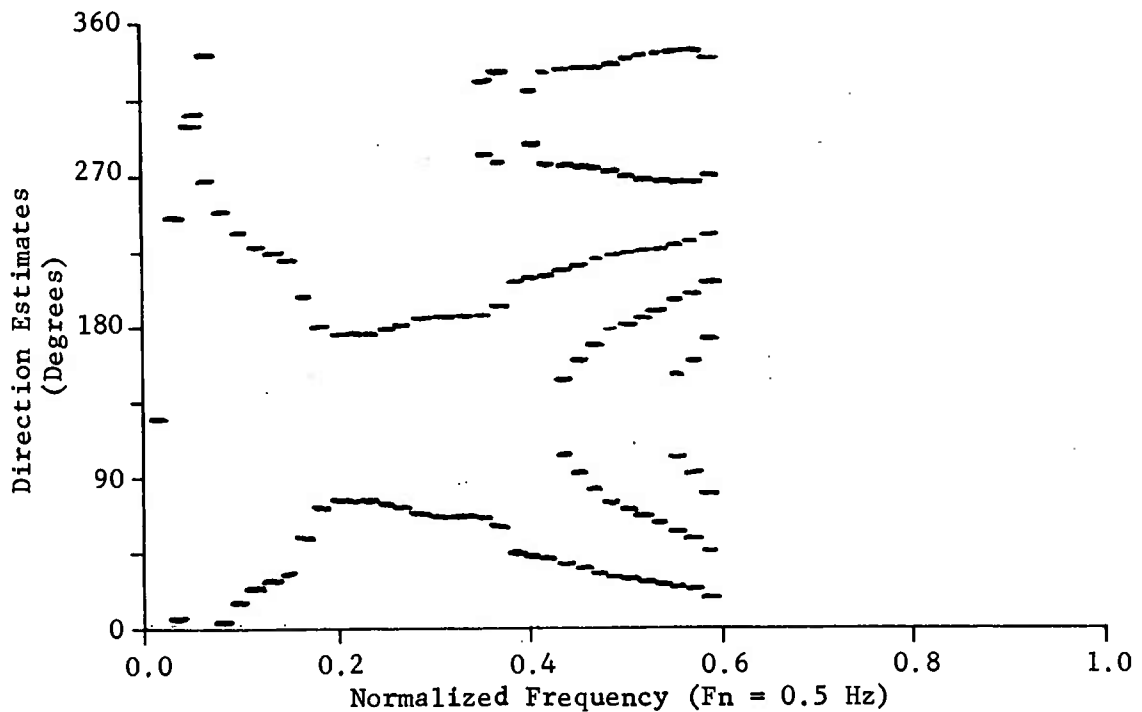
FIGURE 6.   DIRECTIONAL ESTIMATES FOR A PAIR OF ARRAY ELEMENTS

frequency is given below. It is based on Equation (4.16) in the form

$$S(l,m,f) \doteq \frac{1}{M}\left[C_o(f) + 2\sum_{i=1}^{N}\sum_{j=i+1}^{N}\left[C_{ij}(f)\cos(2\pi(l\,X_{ij}+m\,Y_{ij}))\right.\right. \tag{7.7}$$

$$\left.\left. -Q_{ij}(f)\sin(2\pi(l\,X_{ij}+m\,Y_{ij}))\right]\right]$$

where M = [N(N-1) + 1], $C_o(f) = \frac{1}{N}\sum_{i=1}^{N}C_{ii}(f)$

and N = number of array elements.

30

Recall that for a single real wave of frequency $f_o > 0$ and known direction θ_o, $C_{ij}(f_o)$, $Q_{ij}(f_o)$ are known (see Equation (5.3)). These values give

$$S(K_o, \theta_o, f_o) = S(K_o, [\theta_o - \eta], -f_o) = \frac{A^2}{4} \quad .$$

When a single, well-directed swell is expected, it is reasonable to assume a single wave for a given frequency exists, and to select θ_o and $A_o = A^2/4$ such that the least square error between the theoretical cross spectral matrix for a single wave (see Equations (5.1) and (5.3)) and an observed cross spectral matrix is a minimum. Accordingly, using the expressions of Equation (5.3) and an observed cross spectral matrix for a given frequency, f_o, we can form the squared error

$$H = (C_o - A_o)^2$$

$$+ 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}\left[C_{ij} - A_o \cos\left(2\pi\left(l_o X_{ij} + m_o Y_{ij}\right)\right)\right]^2$$

$$+ 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}\left[Q_{ij} + A_o \sin\left(2\pi\left(l_o X_{ij} + m_o Y_{ij}\right)\right)\right]^2$$

$$\text{NOTE: } A_o = \frac{A^2}{4} \; ; \; C_o = \frac{1}{N}\sum_{i=1}^{N} C_{ii} \tag{7.8}$$

Expanding and collecting terms we get

$$H = C_o^2 + 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}\left(C_{ij}^2 + Q_{ij}^2\right) + \left[N(N-1)+1\right]A_o^2$$

$$- 2A_o\left[C_o + 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}C_{ij}\cos\left(2\pi\left(l_o X_{ij} + m_o Y_{ij}\right)\right)\right.$$

$$\left. - 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}Q_{ij}\sin\left(2\pi\left(l_o X_{ij} + m_o Y_{ij}\right)\right)\right] \tag{7.9}$$

or using results in Equation (7.7)

$$H = C_o^2 + 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}(C_{ij}^2 + Q_{ij}^2) + \left[N(N-1)+1\right]\left[A_o^2 - 2A_oS(\ell,m,f_o)\right] \quad (7.10)$$

To find A_o that minimizes H, consider

$$\frac{dH}{dA_o} = 2\left[N(N-1)+1\right]\left[A_o - S(\ell,m,f_o)\right] = 0 \quad (7.11)$$

This requires that A_o be of the form $A_o = S(\ell,m,f_o)$ and a resulting value of H of the form

$$H = C_o^2 + 2\sum_{i=1}^{N-1}\sum_{j=i+1}^{N}(C_{ij}^2 + Q_{ij}^2) - \left[N(N-1)+1\right]\left[S(\ell,m,f_o)\right]^2 \quad (7.12)$$

Since C_o^2, C_{ij}^2, and Q_{ij}^2 are all nonnegative, a minimum H results when $S(\ell,m,f_o)$ is a maximum. A choice of ℓ_o and m_o that maximizes $S(\ell,m,f_o)$ implies a $\theta_o = \arctan m_o/\ell_o$ which is optimum. Remember that we are assuming $K_o^2 = \ell_o^2 + M_o^2$ holds, along with the wave equation. The results then for each f_o is a two-sided energy spectrum estimate $A_o(f_o,\theta_o)$. Appendix B contains a listing of a FORTRAN II program for finding $A_o(f_o,\theta_o)$, the least square wave fit, from a set of spectral matrices obtained from the task SWOC data collection and analysis system described in Bennett et al (June 1964).

Examples of least square single-wave train fit analysis from Bennett (March 1968) are shown in Figure 7.

A more complete collection of the directional spectra calculated from data collected off Panama City, Florida, is given in Appendix A, and in Bennett (November 1967), and Bennett and Austin (September 1968), an unpublished Laboratory Technical Note TN160.

We would actually like a continuous estimate of $S'(\ell,m,f)$. Consider then a third method. From Equation (3.8) we have for a pair of detectors, as illustrated in Figure 8, that

$$P^*(X,Y,f) = \int_{-\infty}^{\infty}\int_{-\infty}^{\infty} S(\ell,m,f)\exp\left[i2\pi(\ell X + mY)\right]d\ell\,dm \quad .$$

DATE: 9 SEPT. 1965
TIME: 1320-1352
STAGE I
WIND SPEED: 37 KNOTS
WIND DIRECTION: 134 DEGREES
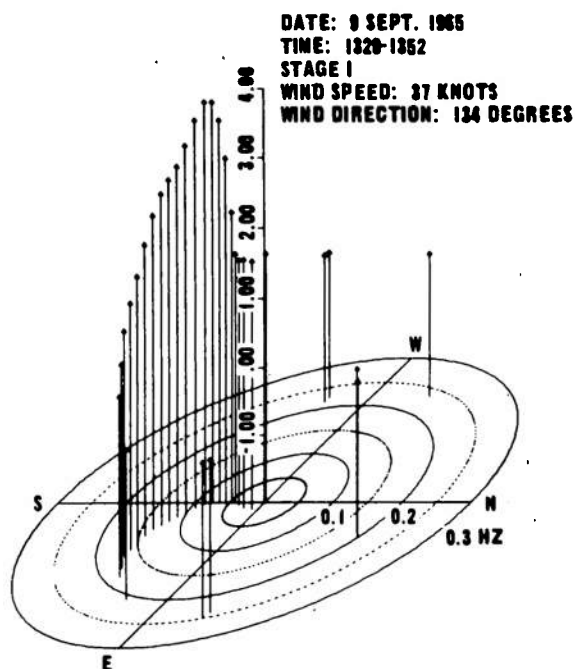
FIGURE 7A DIRECTIONAL SPECTRUM $A_o(f,\theta)$

DATE: 4 JUNE 1965
TIME: 1300-1330
STAGE II
WIND SPEED: 14 KNOTS
WIND DIRECTION: 280 DEGREES
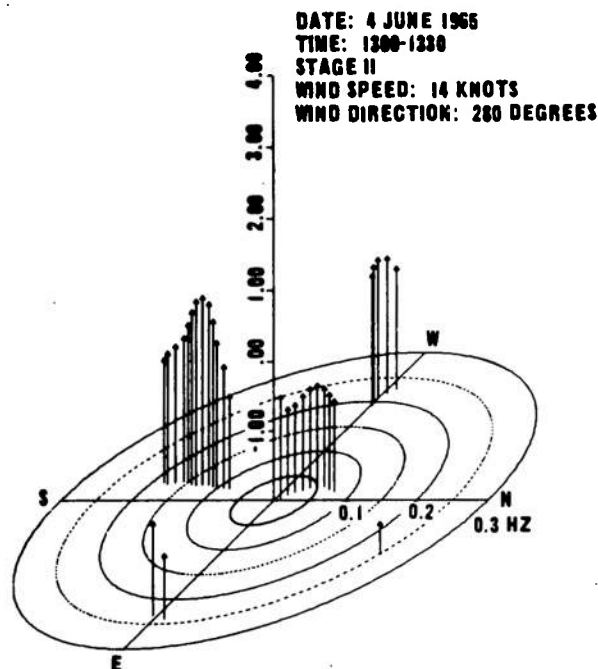
FIGURE 7B DIRECTIONAL SPECTRUM $A_o(f,\theta)$

DATE: 4 JUNE 1965
TIME: 1418-1449
STAGE I
WIND SPEED: 14 KNOTS
WIND DIRECTION: 282 DEGREES
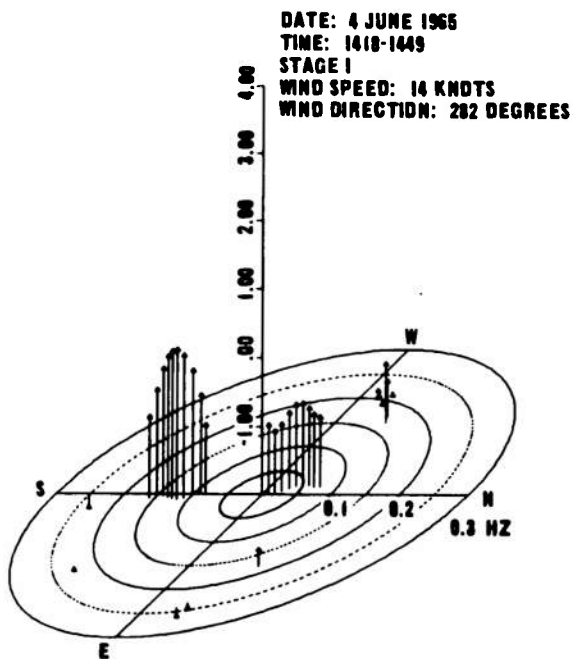
FIGURE 7C DIRECTIONAL SPECTRUM $A_o(f,\theta)$

DATE: 9 SEPT. 1965
TIME: 1320-1353
STAGE II
WIND SPEED: 32 KNOTS
WIND DIRECTION: 125 DEGREES
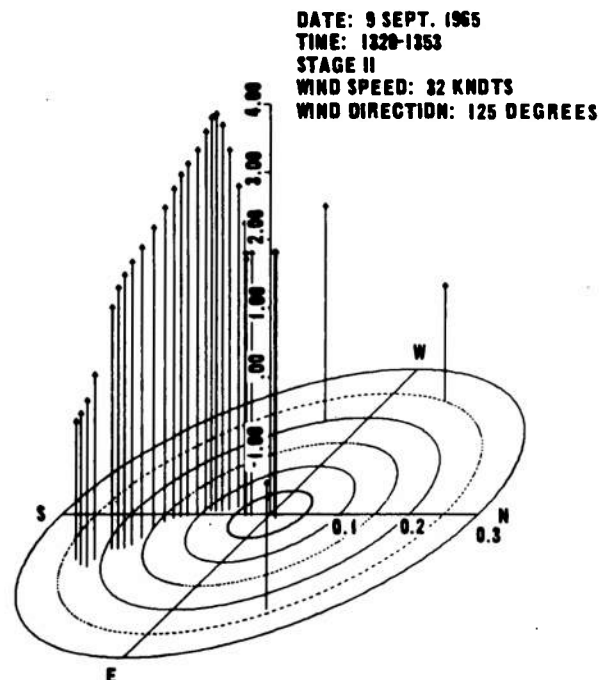
FIGURE 7D DIRECTIONAL SPECTRUM $A_o(f,\theta)$

FIGURE 7.   LEAST SQUARE SINGLE WAVE FIT DIRECTIONAL SPECTRA $A_o(f,\theta_o)$
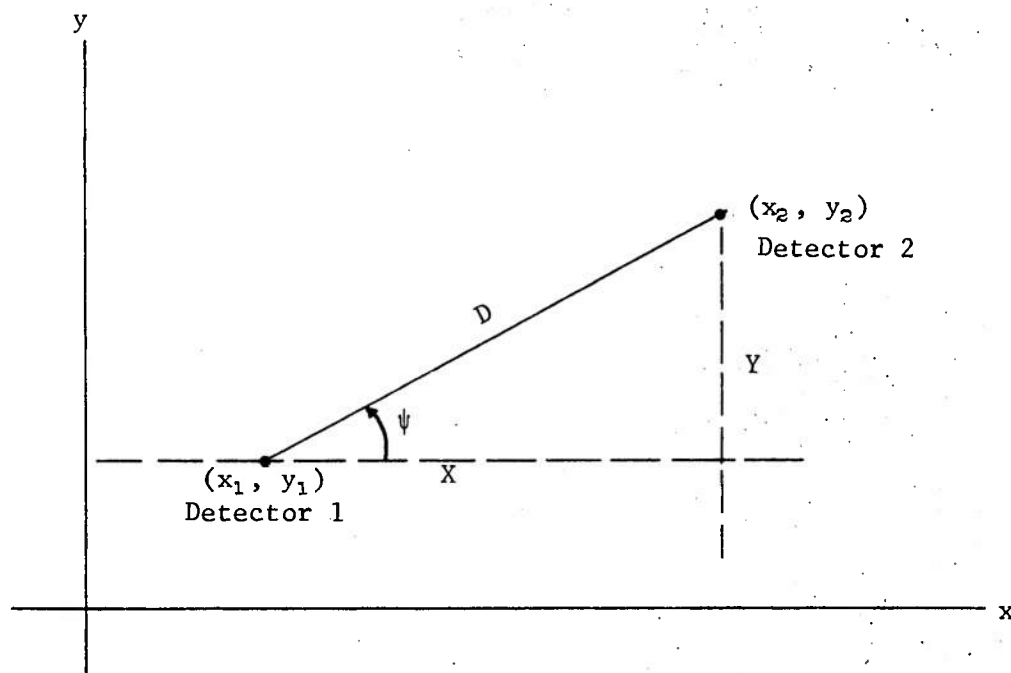
FIGURE 8. DETECTOR GEOMETRY

Let $\ell = K \cos\theta$ and $m = K \sin\theta$

and

$$D = \sqrt{X^2 + Y^2}, \ \psi = \text{Arctan} \ \frac{Y}{X}$$

or

$$X = D \cos\psi \text{ and } Y = D \sin \psi.$$

Using the above changes of variable, we get

$$P^*(X,Y,f) = \int_{-\pi}^{\pi} \int_0^\infty S(K \theta f) \ \text{EXP}\left[i2\pi \left(KD\cos\theta\cos\psi + KD\sin\theta\sin\psi\right)\right] K dK d\theta$$

$$P^*(X,Y,f) = \int_{-\pi}^{\pi} \int_0^\infty S(K,\theta,f) \ \text{EXP}\left[i2\pi KD\cos(\theta-\psi)\right] K dK d\theta$$

(7.13)

34

We have from Equation (3.2) that

$$S(K, \theta, f_o) = S(K, \theta - \pi, -f_o)$$

If we think in terms of $f_O > 0$

$$S'(K, \theta, f_o) = 2 S(K, \theta, f_o) \tag{7.14}$$

We are assuming that the wave number relation of Equation (3.1) holds. Thus Figure 3 is applicable, and we can write the one-sided spectral density as

$$S'(K, \theta, f_o) = 2 a(\theta, f_o) \delta(K - K_o)$$

$$\text{WHERE} \quad \delta(K - K_o) = \begin{cases} 1 & K = K_o \\ 0 & K \neq K_o \end{cases}$$

This allows us to write, $-\infty < f_o < +\infty$,

$$P^*(X, Y, f_o) = \int_{-\pi}^{\pi} \int_0^\infty a(\theta, f_o) \delta(K - K_o) \mathrm{EXP}\left[i 2\pi K D \cos(\theta - \psi)\right] K dK d\theta$$

$$P^*(X, Y, f_o) = \int_{-\pi}^{\pi} a(\theta, f_o) \mathrm{EXP}\left[i 2\pi K_o D \cos(\theta - \psi)\right] K_o d\theta \tag{7.15}$$

We have reduced the problem to finding $[a(\theta, f_o \cdot K_o]$.

From Equation (7.15) we see that

$$P^*(0, 0, f) = P(f) = \int_{-\pi}^{\pi} a(\theta, f_o) K_o d\theta$$

where $P(f_0)$ is the power spectral density of frequency f_0. For better comparison of cases where $P(f_1) = P(f_0)$, $|f_1| \neq |f_0|$, it is convenient to express $a(\theta, f_0)$ in a normalized form

$$A(\theta, f_0) = a(\theta, f_0) K_0$$

35

where we get

$$P(f) = \int_{-\pi}^{\pi} A(\theta, f) \, d\theta \qquad (7.16)$$

Thus if the energy distribution as a function of direction is the same for $P(f_1) = P(f_0)$ then we also get

$$A(\theta, f_1) = A(\theta, f_0).$$

Consider now (assuming $A(\theta, f)$ can be so expressed) a Fourier series expansion of $A(\theta, f)$ for fixed f. Clearly it is periodic in θ with period 2π. Thus for any given $f = f_0$ we can write $A(\theta, f)$ as

$$A(\theta) = \frac{a_0}{2} + \sum_{n=1}^{\infty} \left[a_n \cos n\theta + b_n \sin n\theta \right] \qquad (7.17)$$

Substituting this expansion into Equation (7.15) we get

$$P^*(X, Y, f) = \frac{a_0}{2} \int_{-\pi}^{\pi} \text{EXP } i \, 2\pi \, KD \cos(\theta - \psi) \, d\theta + \sum_{n=1}^{\infty} \left[a_n \int_{-\pi}^{\pi} \cos n\theta \right.$$

$$\left. \text{EXP } i \, 2\pi \, KD \cos(\theta - \psi) \, d\theta + b_n \int_{-\pi}^{\pi} \sin n\theta \, \text{EXP } i \, 2\pi \, KD \cos(\theta - \psi) \, d\theta \right]$$

$$\text{or } P^*(X, Y, f) = \left[\frac{a_0}{2} \int_{-\pi}^{\pi} \cos(2\pi \, KD \cos(\theta - \psi)) \, d\theta + \sum_{n=1}^{\infty} \left(a_n \int_{-\pi}^{\pi} \cos n\theta \cos(2\pi \, KD \right. \right.$$

$$\left. \left. \cos(\theta - \psi)) \, d\theta + b_n \int_{-\pi}^{\pi} \sin n\theta \cos(2\pi \, KD \cos(\theta - \psi)) \, d\theta \right) \right]$$

$$+ j \left[\frac{a_0}{2} \int_{-\pi}^{\pi} \sin(2\pi \, KD \cos(\theta - \psi)) \, d\theta + \right.$$

$$+ \sum_{n=1}^{\infty} \left(a_n \int_{-\pi}^{\pi} \cos n\theta \sin(2\pi \, KD \cos(\theta - \psi)) \, d\theta + \right.$$

$$\left. \left. b_n \int_{-\pi}^{\pi} \sin n\theta \sin(2\pi \, KD \cos(\theta - \psi)) \, d\theta \right) \right] \qquad (7.18)$$

Thus we can express $P*(X,Y,f)$ as complex infinite series with unknown coefficients a_0, a_1, a_2,... and b_1, b_2, ... and constants defined by the integrals (let $Z = 2\pi KD$; $n = 0$, 1, 2, ...) of the form

$$\int_{-\pi}^{\pi} \cos n\theta \, \cos(z \cos(\theta - \psi)) \, d\theta \qquad (7.19)$$

$$\int_{-\pi}^{\pi} \sin n\theta \, \cos(z \cos(\theta - \psi)) \, d\theta \qquad (7.20)$$

$$\int_{-\pi}^{\pi} \cos n\theta \, \sin(z \cos(\theta - \psi)) \, d\theta \qquad (7.21)$$

and

$$\int_{-\pi}^{\pi} \sin n\theta \, \sin(z \cos(\theta - \psi)) \, d\theta \qquad (7.22)$$

Consider Equation (7.19) where $\phi = (\theta - \psi)$ and $d\phi = d\theta$, ψ being a constant. We then have on changing variables

$$\int_{-\pi-\psi}^{\pi-\psi} \cos(n\phi + n\psi) \, \cos(z \cos \phi) \, d\phi$$

$$= \cos n\psi \int_{-\pi-\psi}^{\pi-\psi} \cos n\phi \, \cos(z \cos \phi) \, d\phi \qquad (7.23)$$

$$- \sin n\psi \int_{-\pi-\psi}^{\pi-\psi} \sin n\phi \, \cos(z \cos \phi) \, d\phi$$

Since the integrands in Equation (7.23) are both of period 2π and the interval $[-\pi-\psi, \pi-\psi]$ is of length 2π we can write the equivalent of Equation (7.23) as

$$\cos n\psi \int_{-\pi}^{\pi} \cos n\phi \, \cos(z \cos \phi) \, d\phi$$

$$- \sin n\psi \int_{-\pi}^{\pi} \sin n\phi \, \cos(z \cos \phi) \, d\phi \qquad (7.24)$$

37

From Ryzhik and Gradshteyn (1965 - page 402) and noting that the second integrand is odd we get Equation (7.23) equivalent to

$$\cos n \psi \left[2\pi \cos\left(\frac{n\pi}{2}\right) J_n(z) \right] \qquad (7.25)$$

where $J_n(Z)$ is the Bessel function of the first kind. Employing a similar procedure for Equations (7.20), (7.21), and (7.22) we get

$$P^*(X,Y,f) = \frac{a_o}{2}\left[2\pi \, J_o(2\pi K D) \right] +$$
$$\sum_{n=1}^{\infty}\left[a_n \cos n \psi \, 2\pi \cos\left(\frac{n\pi}{2}\right) J_n(2\pi K D) + b_n \sin n \psi \, 2\pi \right.$$
$$\left. \cos\left(\frac{n\pi}{2}\right) J_n(2\pi K D) \right]$$
$$+ j \sum_{n=1}^{\infty}\left[a_n \cos n \psi \, 2\pi \sin\left(\frac{n\pi}{2}\right) J_n(2\pi K D) \right.$$
$$\left. + b_n \sin n \psi \, 2\pi \sin\left(\frac{n\pi}{2}\right) J_n(2\pi K D) \right] \qquad (7.26)$$

Now
$$\cos\left(\frac{n\pi}{2}\right) = \begin{cases} 0 & n \text{ odd} \\ (-1)^{n/2} & n \text{ even} \end{cases}$$

and
$$\sin\left(\frac{n\pi}{2}\right) = \begin{cases} 0 & n \text{ even} \\ (-1)^{\frac{n-1}{2}} & n \text{ odd} \end{cases}$$

Thus we get
$$P^*(X,Y,f) = \frac{a_o}{2}\left[2\pi \, J_o(2\pi K D) \right]$$
$$+ \sum_{n=2,4,6,\cdots}^{\infty}\left[2\pi \, J_n(2\pi K D)(-1)^{\frac{n}{2}}\left(a_n \cos n \psi + b_n \sin n \psi \right) \right]$$
$$+ j \sum_{n=1,3,5,\cdots}^{\infty}\left[2\pi \, J_n(2\pi K D)(-1)^{\frac{n-1}{2}}\left(a_n \cos n \psi + b_n \sin n \psi \right) \right]$$
$$\qquad (7.27)$$

From a spectral matrix of the form in Equation (4.13), $M = N(N-1) + 1$ different equations can be set up using Equation (7.27). This allows us to get a system of equations for any m of the unknown coefficients a_0, a_1, a_2, ... ; b_1, b_2, b_3, ... while assuming the rest of the coefficients are negligible. We can then solve for the m desired coefficient values. This has not worked well in practice for two reasons. The inverse of the matrix of constants obtained is sparse and often ill-conditioned. Further, if the wave energy is from a narrow beam width (30 degrees or less), the first 100 harmonics in the Fourier series expansion can be significant. There is perhaps a more efficient orthogonal set of functions than the sines and cosines of the standard Fourier expansion. Search for such an orthogonal set should prove fruitful. One might start with Walsh or Haar functions. See Hammond and Johnson (February 1960).

8. SUMMARY

It is believed that the least square method of using the information in a spectral matrix is the best method presently available. Examples of such analysis can be found in several of the papers in the bibliography. A collection of ocean-wave induced, bottom pressure directional spectra from these papers is given in Appendix A.

An iterative extension of the least square method can be found in an excellent paper by Munk et al (April 1963). Some details of this method are given in Appendix C along with an example result and a FORTRAN program for the method.

There is merit to using the coherency,

$$R_{ij}(f) = \frac{|P_{ij}(f)|}{(P_{ii}\, P_{jj})^{\frac{1}{2}}} \, ,$$

to form the weights b_{ij} in Equation (4.16). One idea being explored is

$$b_{ij} = \frac{R_{ij}}{1 + 2 \sum_{i=1}^{N-1} \sum_{j=i+1}^{N} R_{ij}} = \frac{R_{ij}}{R} \, .$$

REFERENCES

Bennett, C. M., "A Directional Analysis of Sea Waves from Bottom Pressure Measurements," *Transactions: Ocean Sciences and Engineering of the Atlantic Shelf,* Marine Technology Society, Washington, D. C., pp. 71-87 (March 1968), Unclassified.

U.S. Navy Mine Defense Laboratory Report 344, *Power Spectra of Bottom Pressure Fluctuations in the Nearshore Gulf of Mexico During 1962 and 1963,* by C. M. Bennett, November 1967, Unclassified.

Bennett, C. M., Pittman, E. P., and Austin, G. B., "A Data Processing System for Multiple Time Series Analysis of Ocean Wave Induced Bottom Pressure Fluctuations," *Proceedings of the First U.S. Navy Symposium on Military Oceanography,* U.S. Navy Oceanographic Office, Washington, D. C., pp. 379-415, June 1964.

David Taylor Model Basin Report No. 8, *On the Joint Estimation of the Spectra, Cospectrum and Quadrature Spectra of a Two-Dimensional Stationary Gaussian Process,* by N. R. Goodman, March 1957, Unclassified.

N. Y. University Technical Report No. 8, (EES Project No. A-366), *Two Orthogonal Classes of Functions and Their Possible Applications,* by J. L. Hammond and R. S. Johnson, February 1960, Unclassified.

Kinsman, Blair, *Wind Waves - Their Generation and Propagation on the Ocean Surface,* Prentice-Hall, Inc., Englewood Cliffs, New Jersey, 1965 (pp. 368-386).

Munk, W. H., Miller, G. R., Snodgrass, F. E., and Barber, N. F., "Directional Recording of Swell from Distant Storms," *Philosophical Transactions of the Royal Society of London,* Series A. Vol. 255, No. 1062, pp. 505-584, April 1963.

Parzen, Emanuel, *Stochastic Processes,* Holden-Day, Inc., San Francisco, California (1962).

Pierson, W. J. Jr., *Wind Generated Gravity Waves,* Academic Press, Inc., New York (1955), v. 2, pp. 126-129, 1955.

Pierson, W. J. Jr., and Marks, Wilbur, "The Power Spectrum Analysis of Ocean Wave Records," *Transactions, American Geophysical Union,* v. 36, No. 6 (1952).

Ryzhik, I. M. and Gradshteyn, I. S., *Table of Integrals, Series, and Products,* Academic Press, New York, 1965.

St. Denis, M., and Pierson, W. J. Jr., "On the Motions of Ships in Confused Seas," *Transactions of the Society of Naval Architects and Marine Engineers,* v. 61, pp. 280-357 (1953).

BIBLIOGRAPHY

Barber, N. F., "Design of 'Optimum' Arrays for Direction Finding," *Electronic and Radio Engineer,* New Series 6, v. 36, pp. 222-232, June 1959.

Bennett, C. M., "Digital Filtering of Ocean Wave Pressure Records to Records of Prescribed Power Spectral Content," *Proceedings of the Fifth Annual Southeastern Regional Meeting of Association for Computing Machinery,* June 1966.

Bennett, C. M., "An Annual Distribution of the Power Spectra of Ocean Wave Induced Bottom Pressure Fluctuations in the Near Shore Gulf of Mexico," (abstract), *Transactions, American Geophysical Union,* v. 48, No. 1, p. 140, April 1967.

Texas A&M College Reference 62-1T, *Instrumentation and Data Handling System for Environmental Studies off Panama City, Florida,* by Roy D. Gaul, February 1962, Unclassified.

Texas A&M University Reference 66-12T, *Automated Environmental Data Collected off Panama City, Florida, January 1965 - April 1966,* by A. Kirst, Jr., and C. W. McMath, June 1966, Unclassified.

Scripps Institute of Oceanography Bulletin, *Spectra of Low-Frequency Ocean Waves,* by W. H. Munk, F. E. Snodgrass, and J. J. Tucker, v. 7, No. 4, pp. 283-362, 1959.

APPENDIX A

A COLLECTION OF DIRECTIONAL OCEAN WAVE
BOTTOM PRESSURE POWER SPECTRA

This appendix is a collection of the results of a least square, directional, single-wave train analysis of the cross power spectral matrix resulting from the analysis of ocean bottom pressure data. The data were collected at Stages I and II offshore from Panama City, Florida, during 1965. The data collection system and the estimation of the cross power spectral matrix associated with a set of data are described in Bennett, et al (June 1964). Augmented pentagonal arrays, containing six pressure transducers each, were located seaward of each of the stages. Stage I is 11 miles offshore in approximately 103 feet of water, and Stage II is 2 miles offshore in approximately 63 feet of water.

Certain parameter values are pertinent to the directional analyses presented: the number of data points in each pressure data set is $N = 1800$; the sampling rate is once per second, $\Delta t = 1$ second. On the cylindrical polar plots frequency is the radial variable and compass bearing the angular variable. The vertical axis is $\log_{10}$ of power spectral density in inches^2-seconds of water pressure. The frequency axis range is 0 to 0.3 Hz in 0.05 Hz increments. This is illustrated in Figure 7 of the report. In each plot title, the date, time, and location (stage) is indicated. The value WD is wind direction in compass degrees, and WS is wind speed in knots. Appendix B gives a listing of the FORTRAN II computer program used to produce the plots.
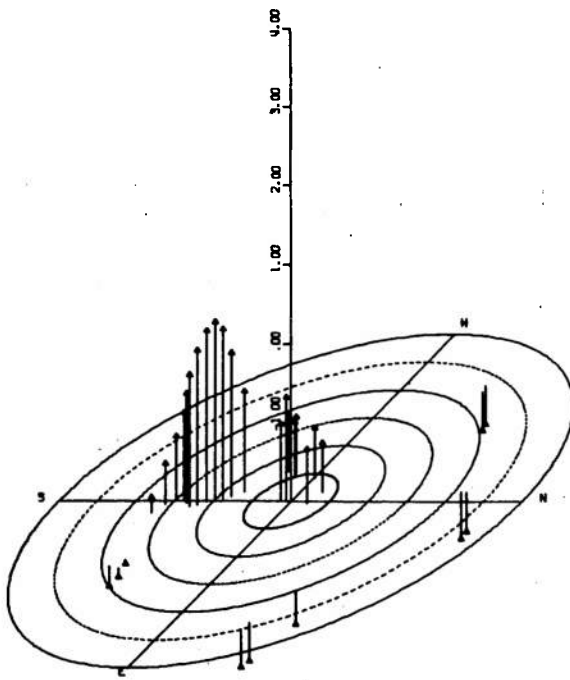
DATE06/01/65 TIME1154-1226 STAGE1 NO185
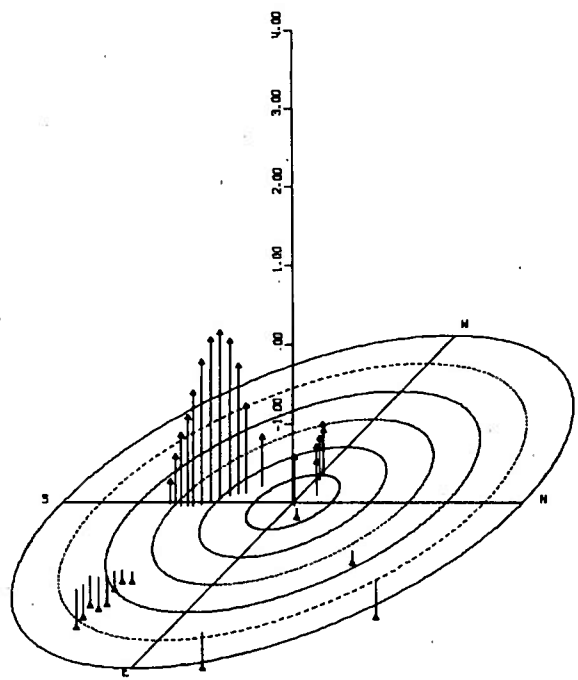
DATE06/01/65 TIME1227-1259 STAGE1 NO170
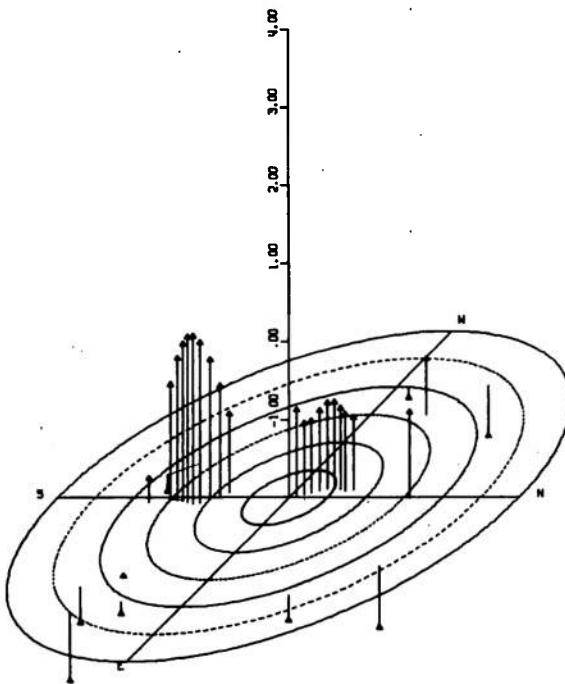
DATE06/04/65 TIME1415 1449 STAGE1 NO282
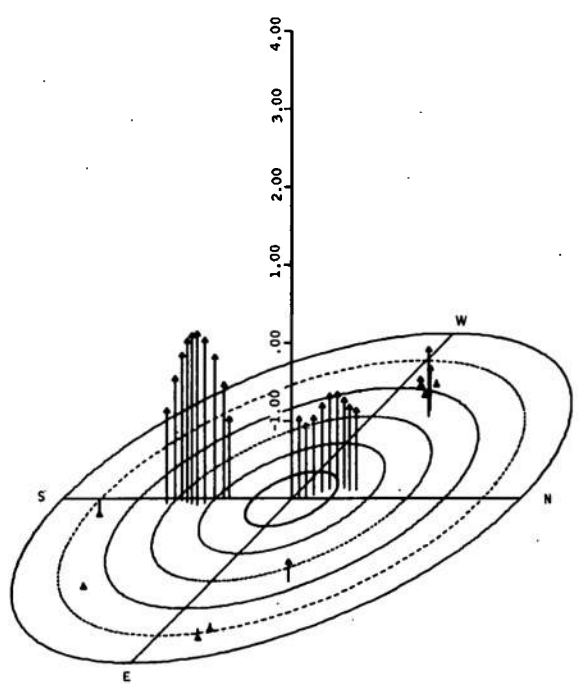
DATE06/04/65 TIME1418-1449 STAGE1 Wo282

DATE06/04/65 TIME1608-1639 STAGE1 NO360

DATE06/04/65 TIME1640-1708 STAGE1 NO395

DATE06/04/65 TIME1709-1731 STAGE1 NO315

DATE06/04/65 TIME2007-2035 STAGE1 NO 45

A-3
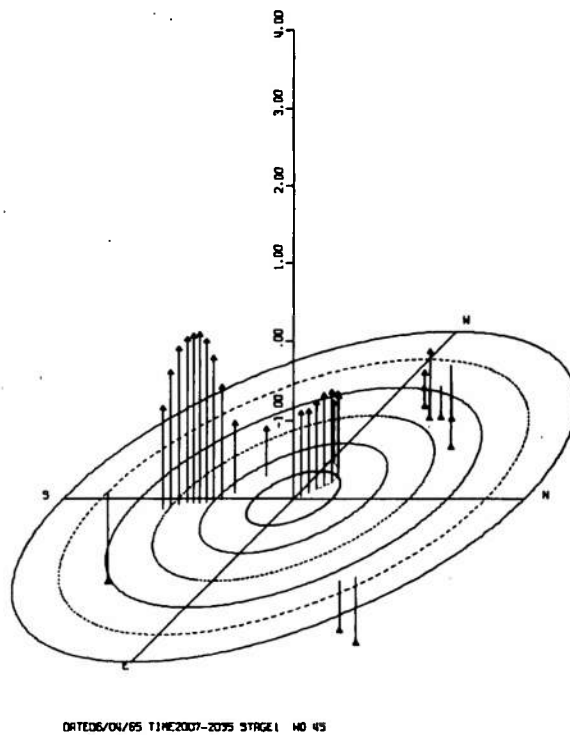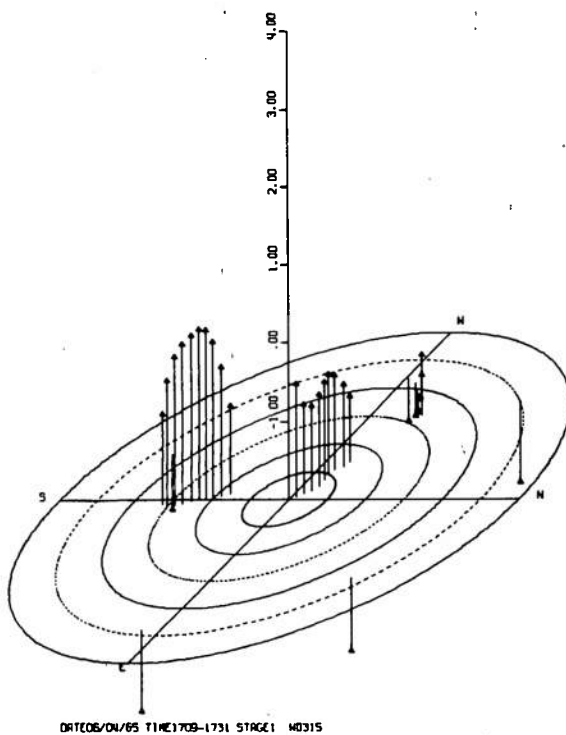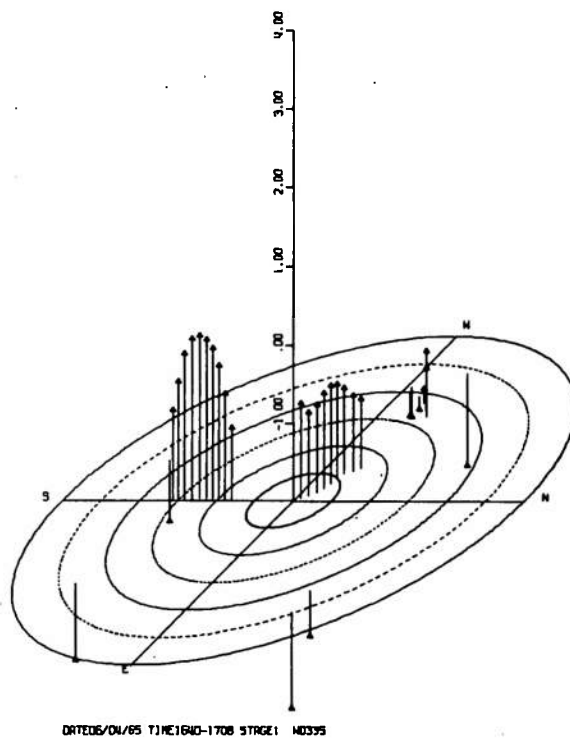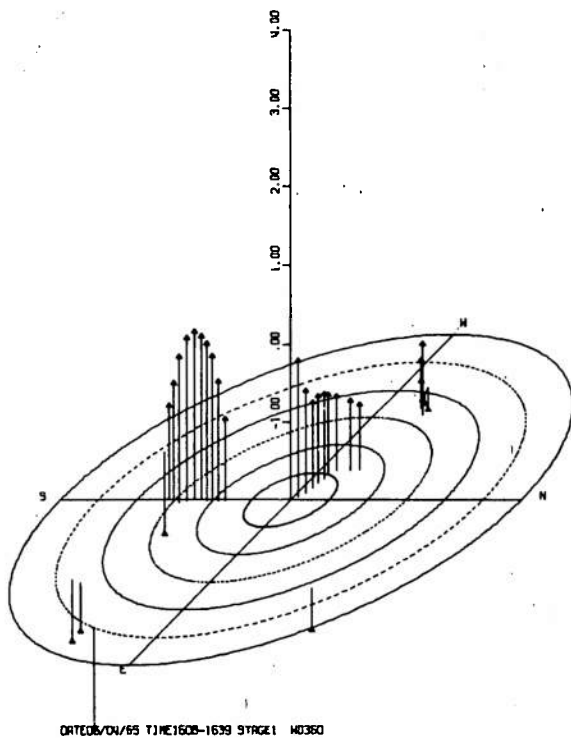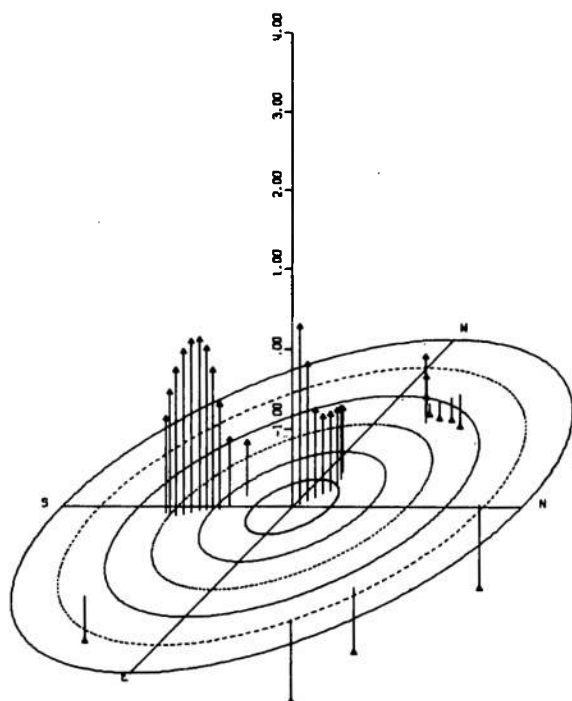
DATE06/04/65 TIME2105-2133 STAGE1 NO 80
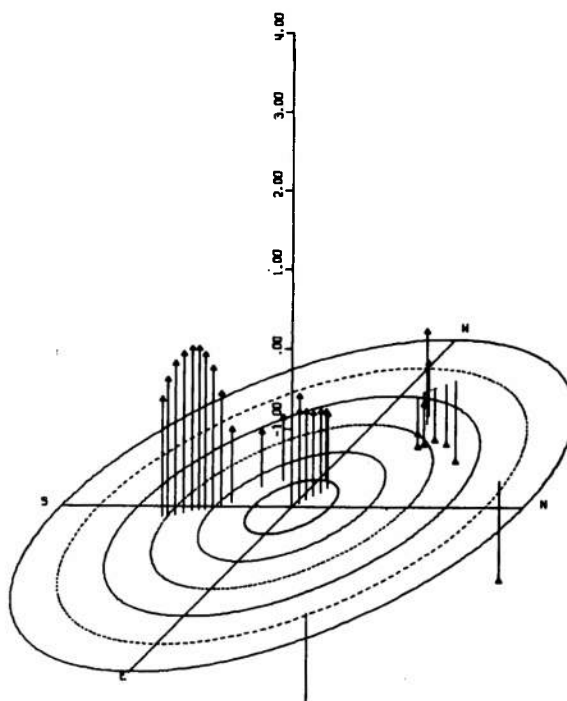
DATE06/05/65 TIME0003-0032 STAGE1 NO100
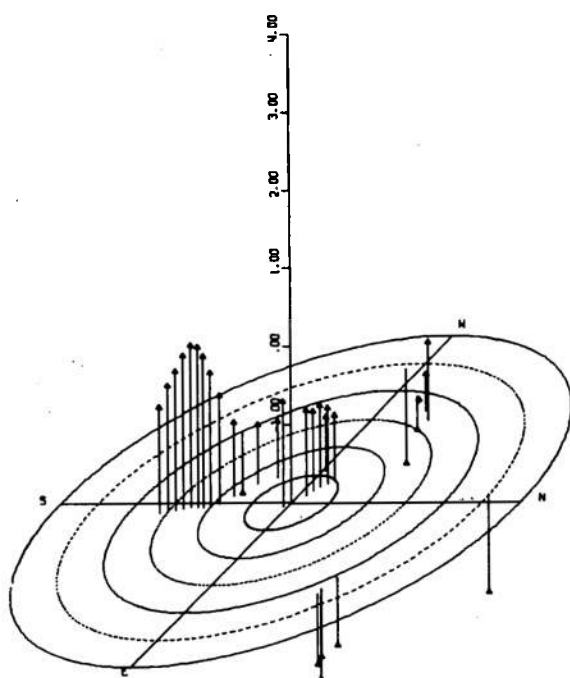
DATE 06/05/65 TIME0033-0101 STAGE1 NO100
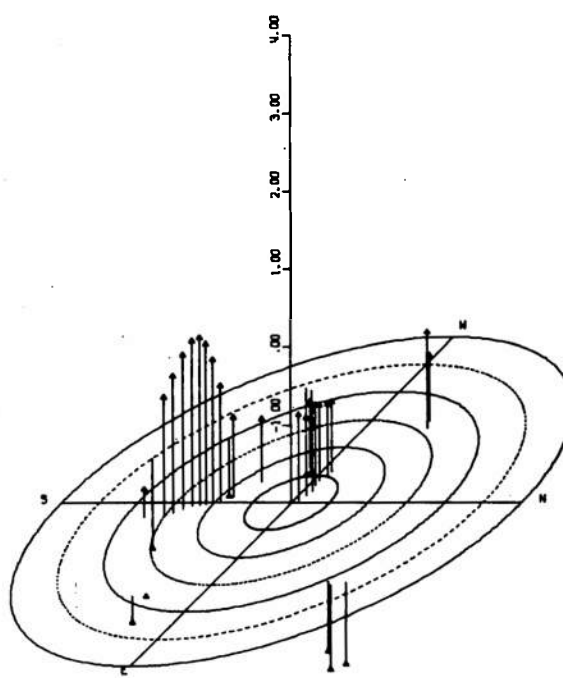
DATE06/05/65 TIME0102-0130 STAGE1 NO100
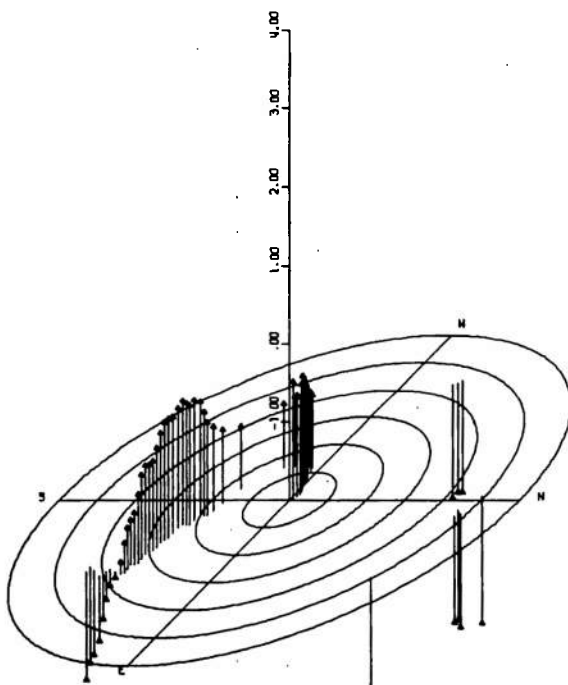
1701-1730 07SEP65 51 H0073 WS16 TS24F1R14S-17N RUN 22
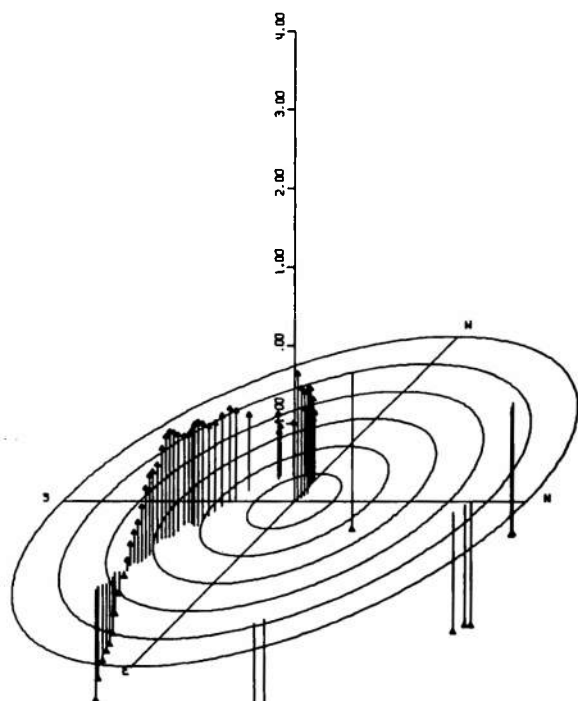
1901-1930 07SEP65 51 H0060 WS16 TS24F1R26S-19N RUN 23
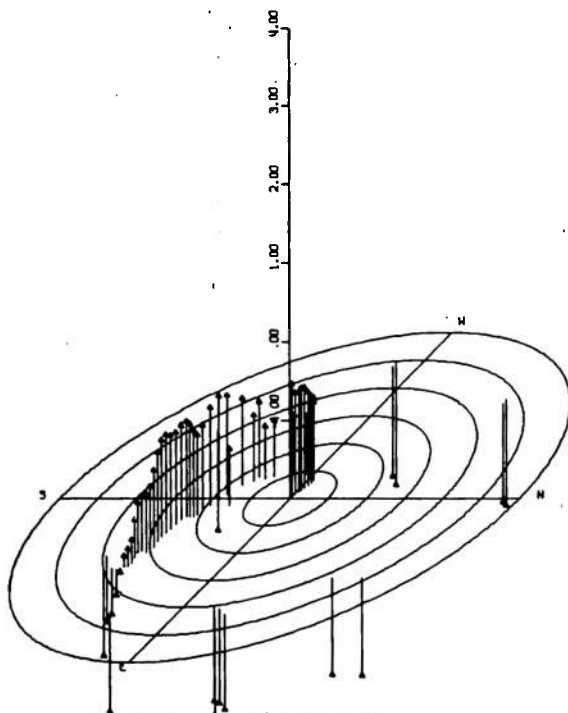
2101-2130 07SEP65 51 H0073 WS22 TS25F1R082-091 RUN 24
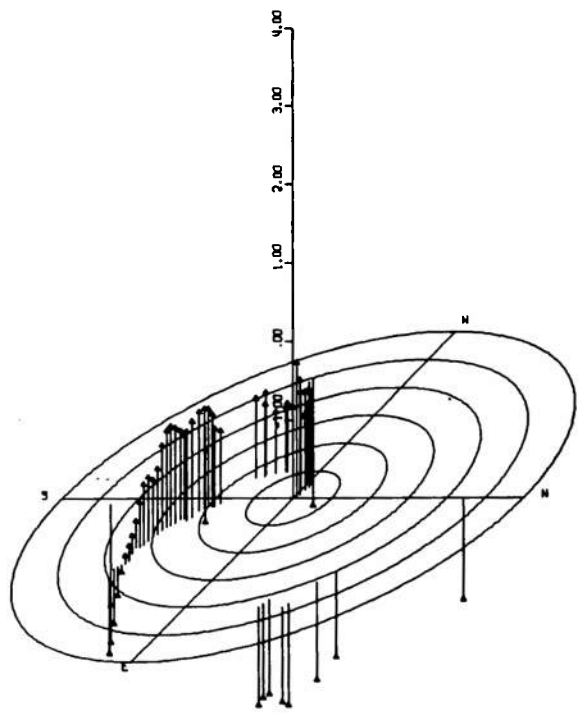
2301-2330 07SEP65 51 H0082 WS19 TS25F1R182-211 RUN 25
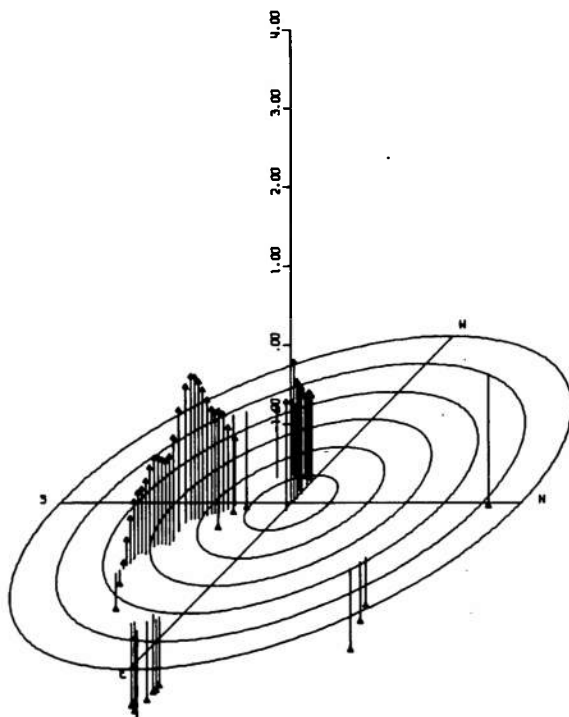
0101-0130 08SEP65 51 WOO95 WS21 TS25F1R302-331 RUN 26
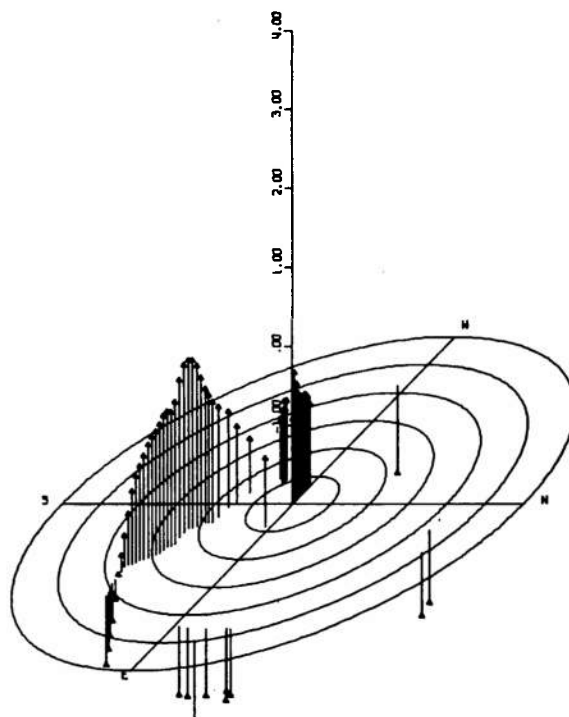
0301-0330 08SEP65 51 WOO89 WS19 TS25F1R422-451 RUN 27
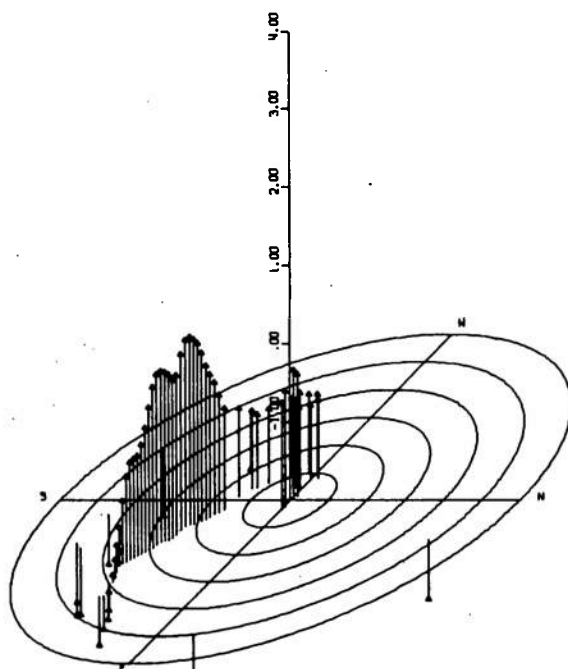
0301-0330 08SEP65 51 WOO79 WS19 TS25F1R542-571 RUN 28
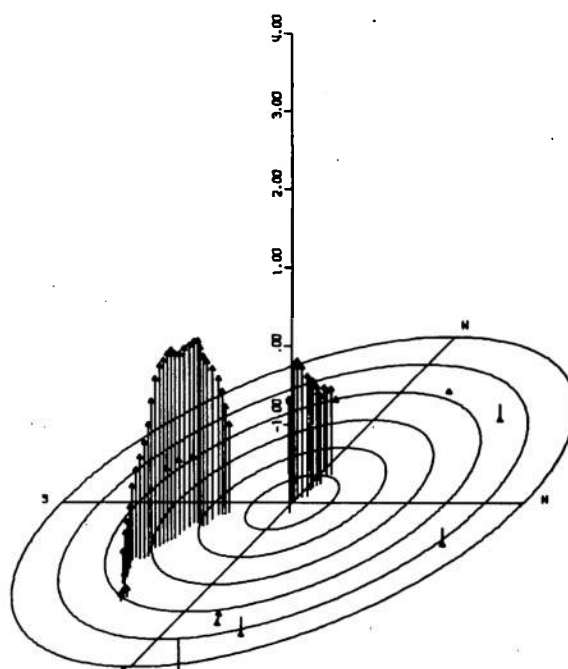
0701-0730 08SEP65 51 WOO83 WS22 TS25F1R662-691 RUN 29
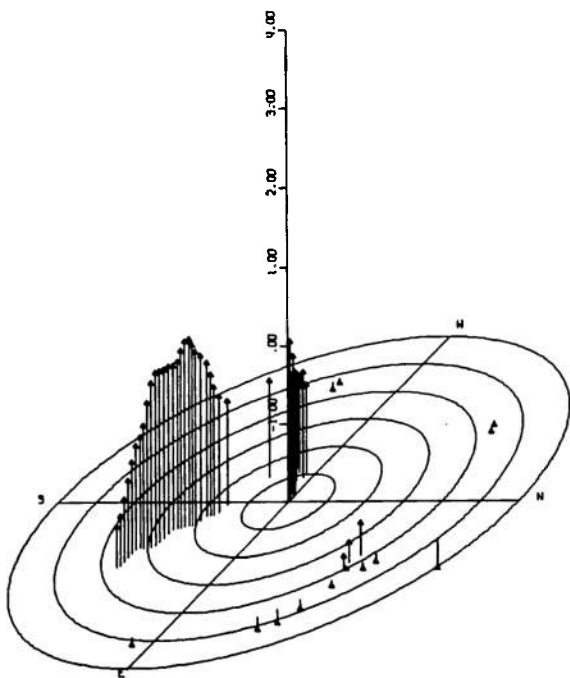
0901-0930 08SEP65 51 W0077 WS18 T326F1A064-093 RUN 30
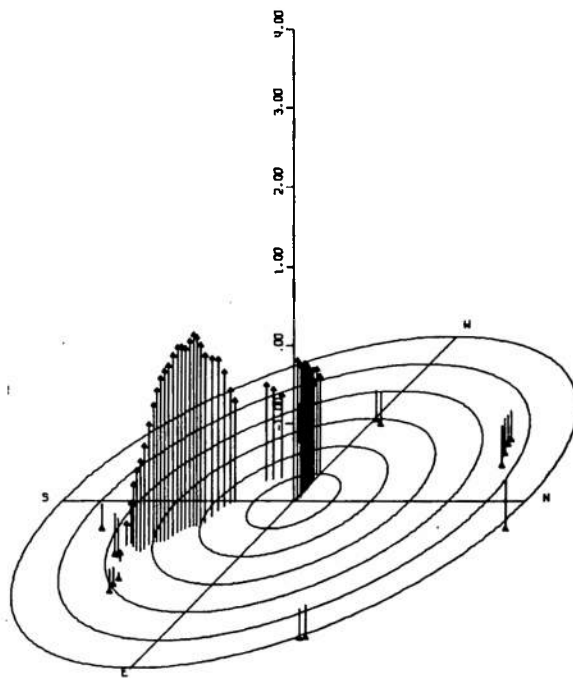
1101-1131 08SEP65 51 W01V1 WS16 T326F1A164-213 RUN 31
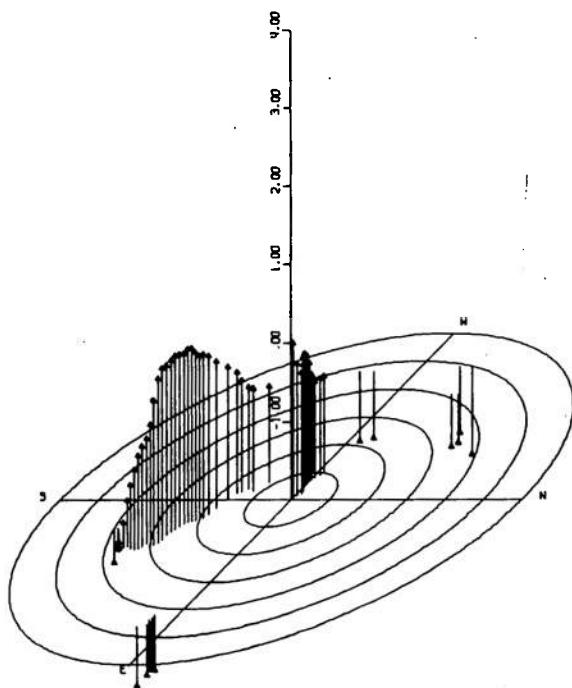
1301-1331 08SEP65 51 W0055 WS17 T326F1A304-333 RUN 32
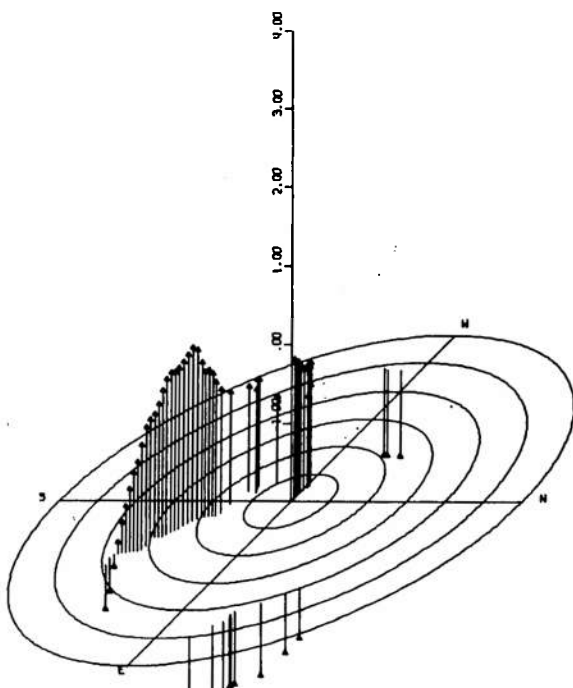
1501-1531 08SEP65 51 W0070 WS17 T326F1A424-453 RUN 33
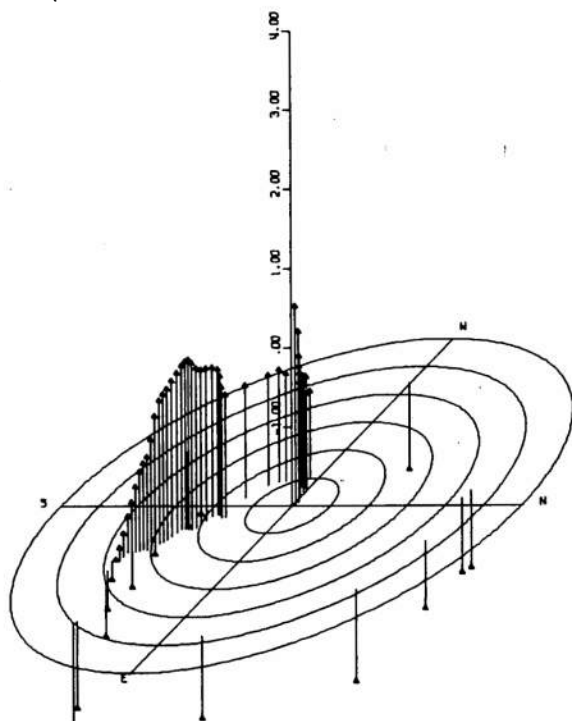
1701-1731 08SEP65 51 W0072 W521 T326F1R544-573 RUN 34
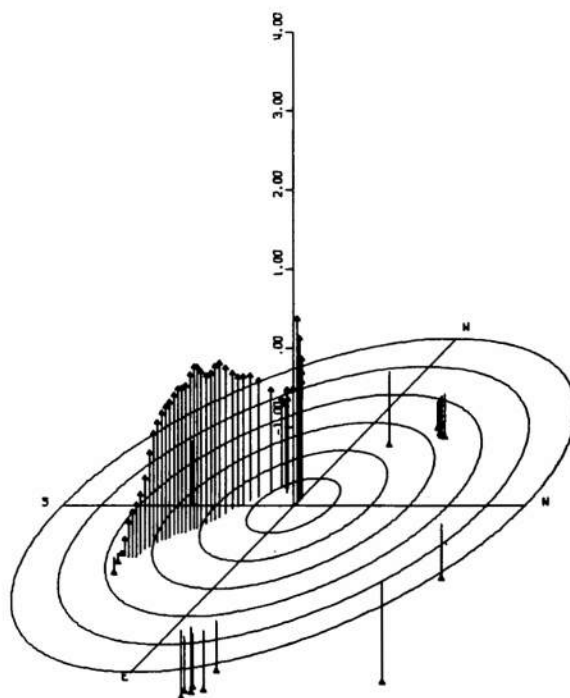
1901-1931 08SEP65 51 W0071 W522 T326F1R684-693 RUN 35
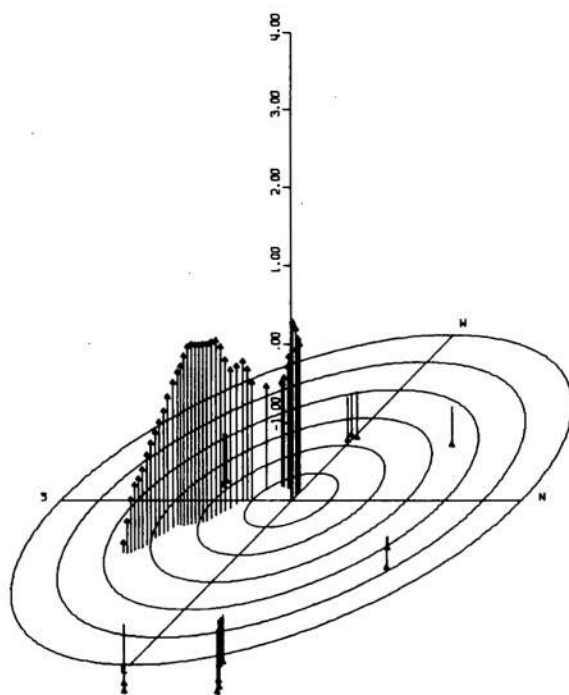
2101-2130 08SEP65 51 W0074 W525 T327F2R042-071 RUN 36
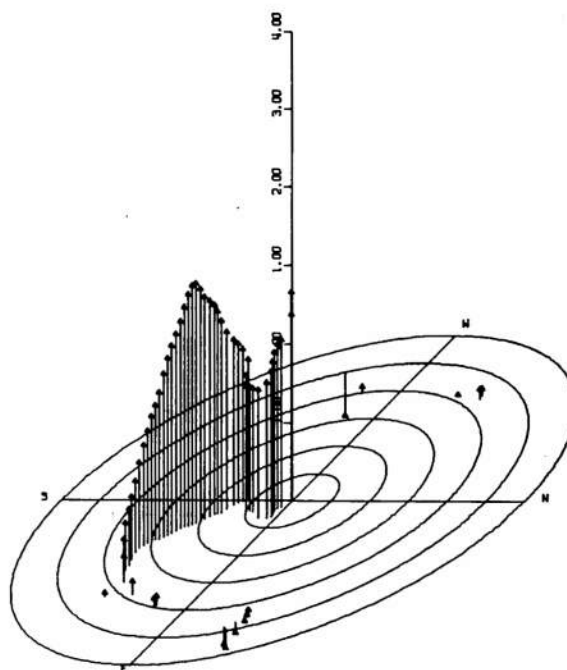
2301-2330 08SEP65 51 W5083 W526 T327F2R162-191 RUN 37
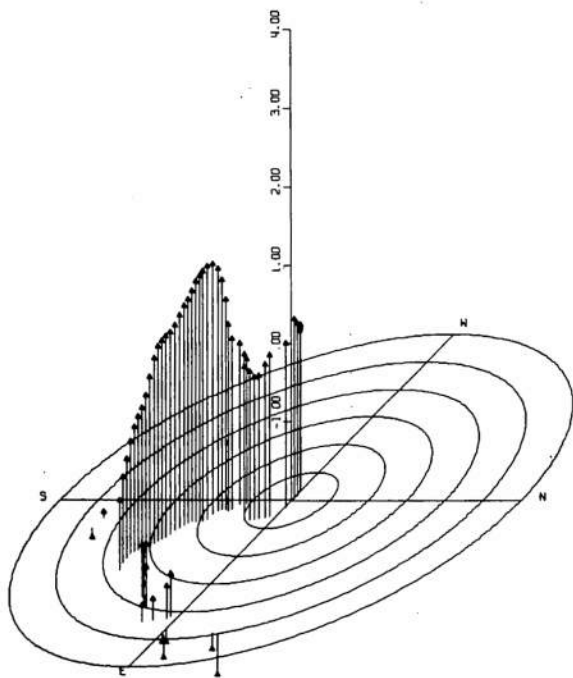
0101-0130 09SEP65 51 W0081 WS28 T327F2R282-311 RUN 38
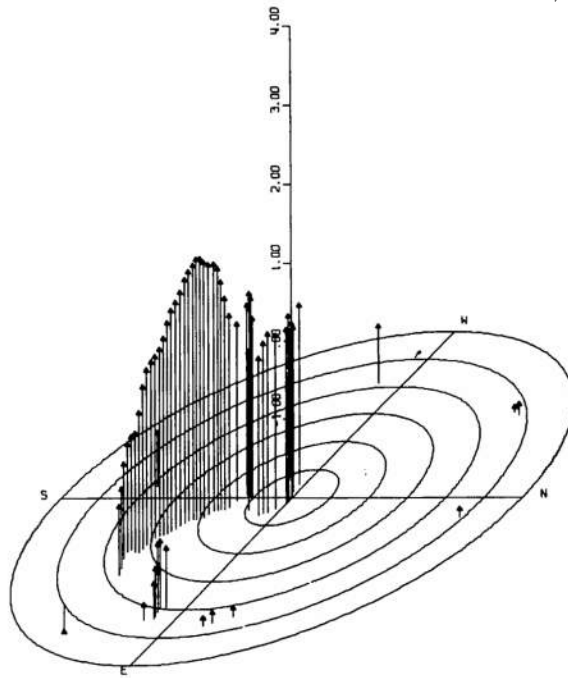
0201-0230 09SEP65 51 W5085 WS27 T327F2R342-371 RUN 39
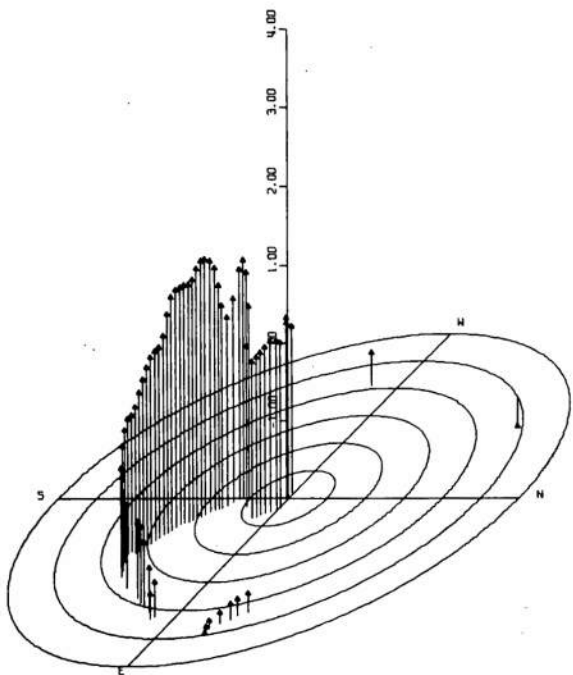
0301-0330 09SEP65 51 W0080 WS27 T327F2R402-431 RUN 40
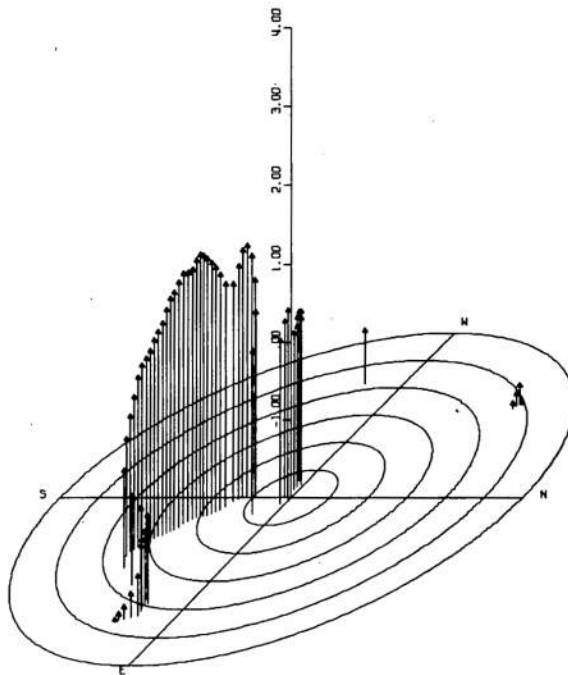
0401-0430 09SEP65 51 W0082 WS26 T327F2R462-491 RUN 41
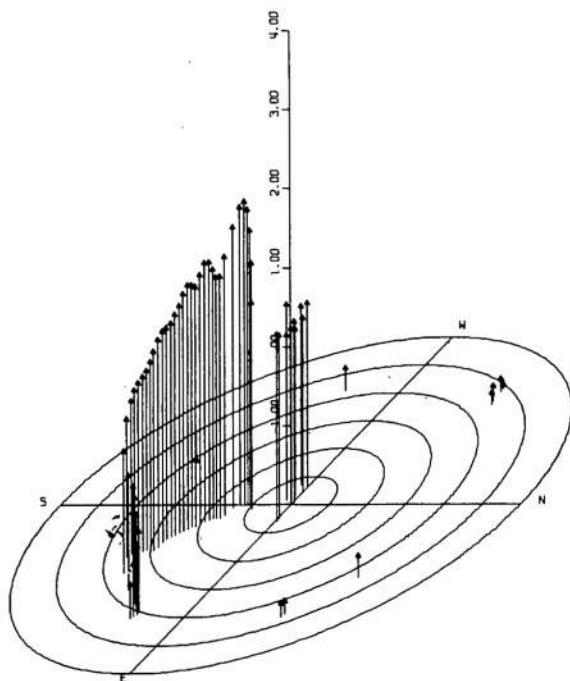
0501-0530 09SEP65 51 W0085 W528 T327F2R522-551 RUN 42
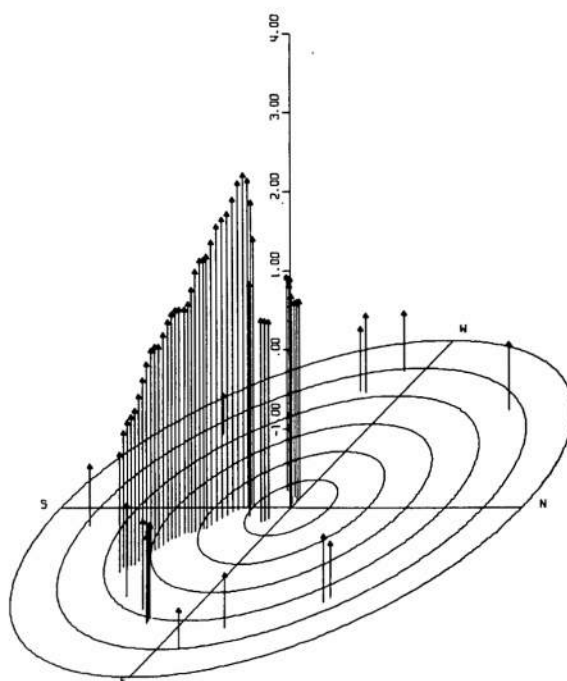
0601-0630 09SEP65 51 W0088 W528 T327F2R582-611 RUN 43
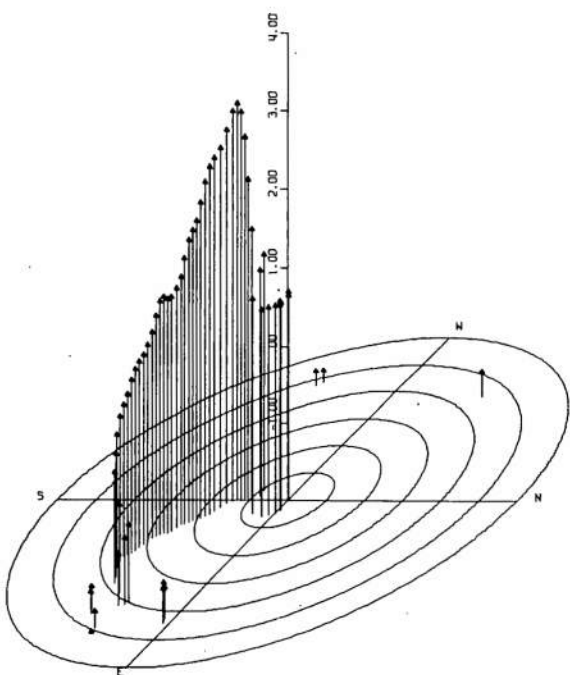
0701-0730 09SEP65 51 W0092 W528 T327F2R642-771 RUN 44
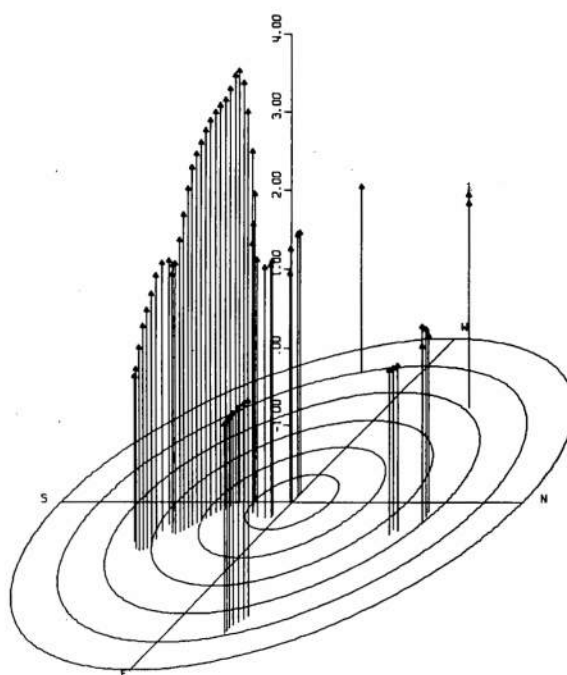
0801-0830 09SEP65 51 W0103 W527 T083F1R003-032 RUN 45
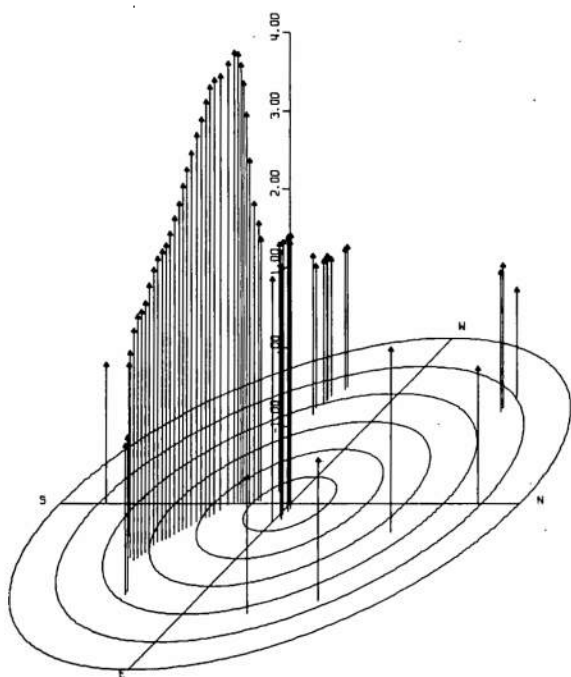
0901-0930 09SEP65 51 W0117 W528 TO83F1R063-092 RUN 46
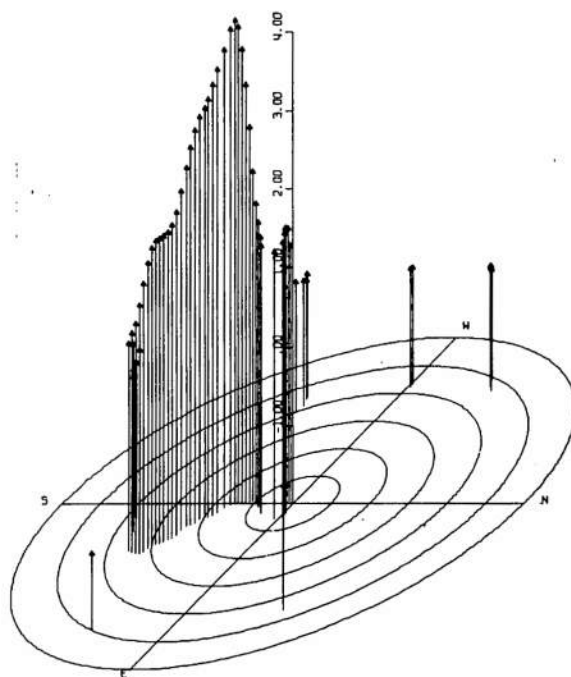
1001-1030 09SEP65 51 W0123 W533 TO83F1R123-152 RUN 47
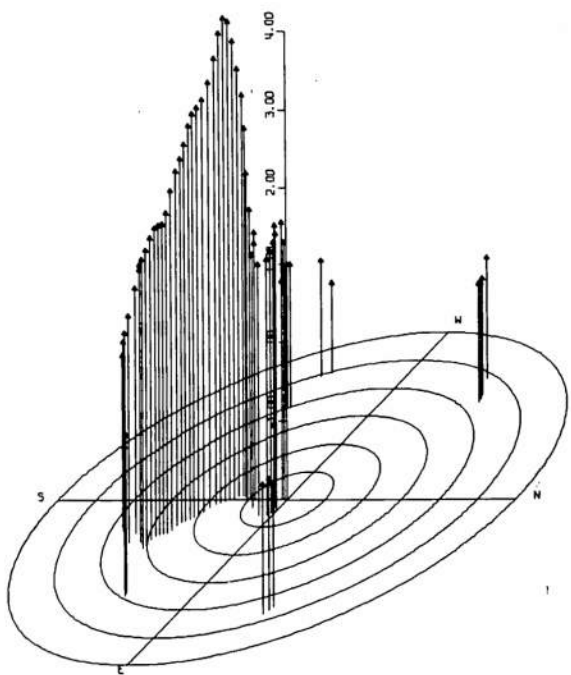
1101-1131 09SEP65 51 W0125 W534 TO83F1R183-212 RUN 48
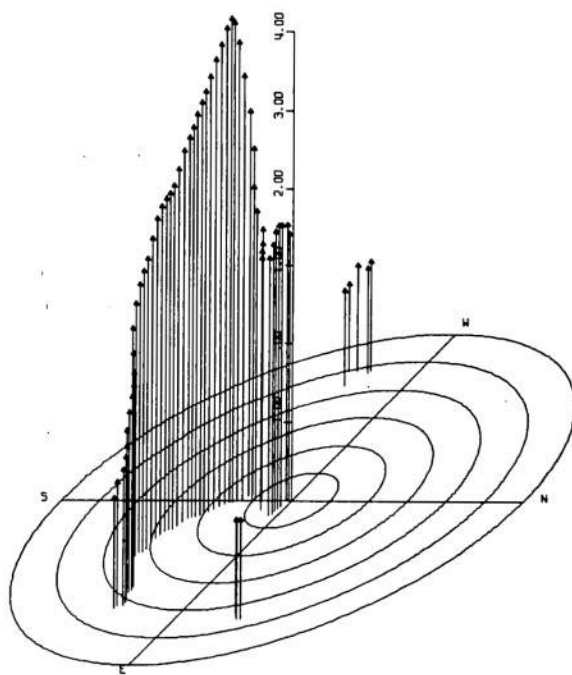
1201-1230 09SEP65 51 W0130 W534 TO83F1R243-272 RUN 49
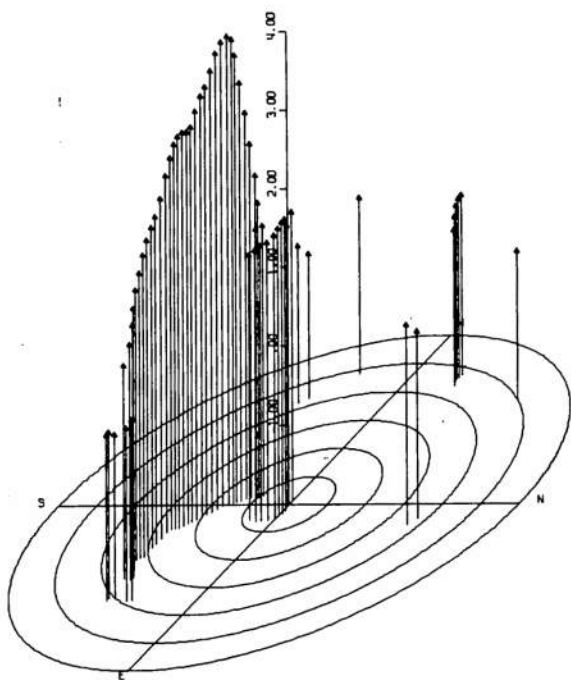
1310-1339 09SEP65 51 NO133 W535 T083F2N001-030 RUN 50
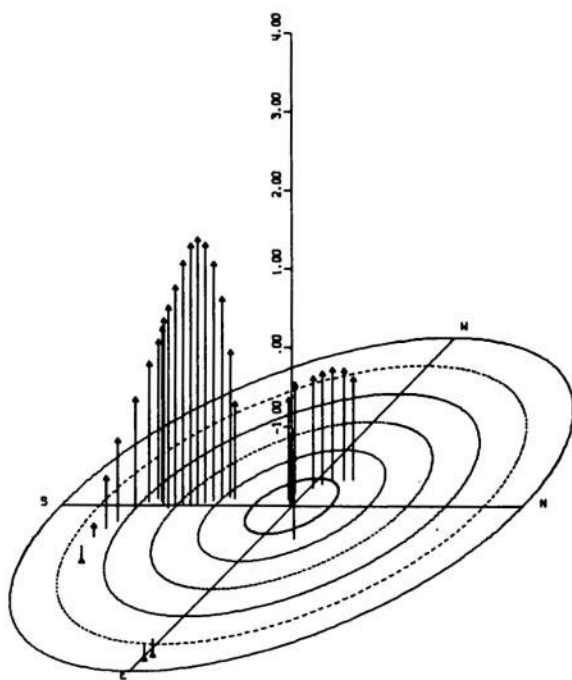
DATE05/04/65 TIME1200-1229 STAGE2   NO 82
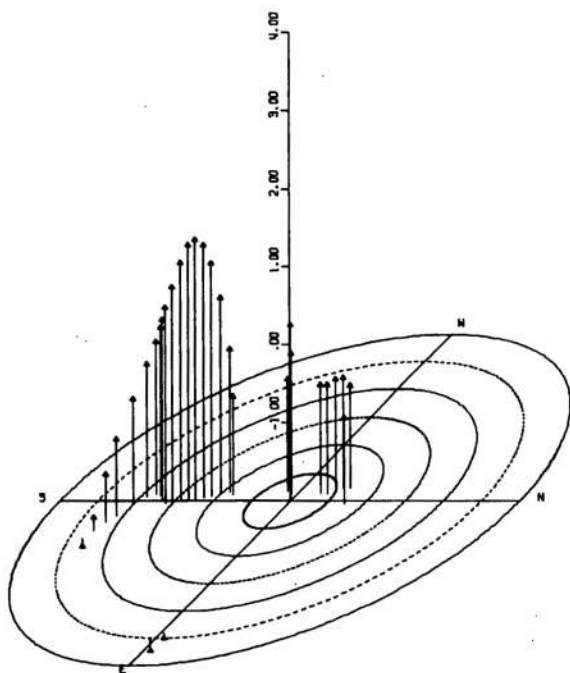
DATE05/04/65 TIME1200-1229 STAGE2   NO 82
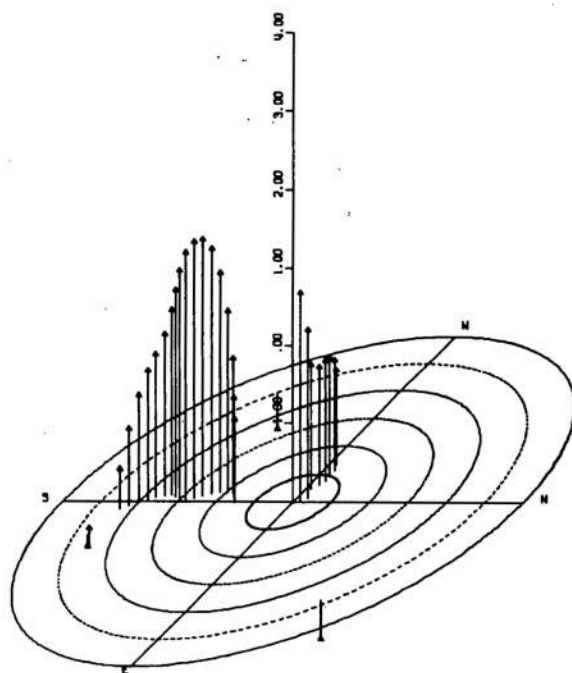
DATE05/04/65 TIME1301-1353 STAGE2   NO 86
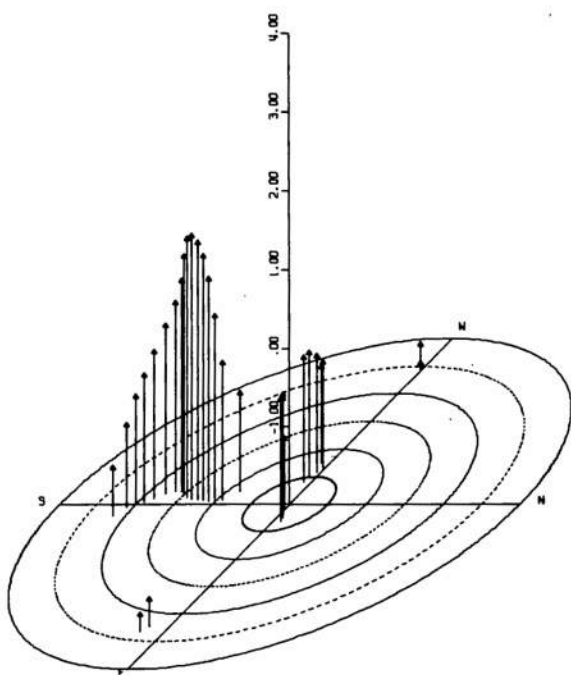
DATE05/04/65 TIME1401-1425 STAGE2 NO113
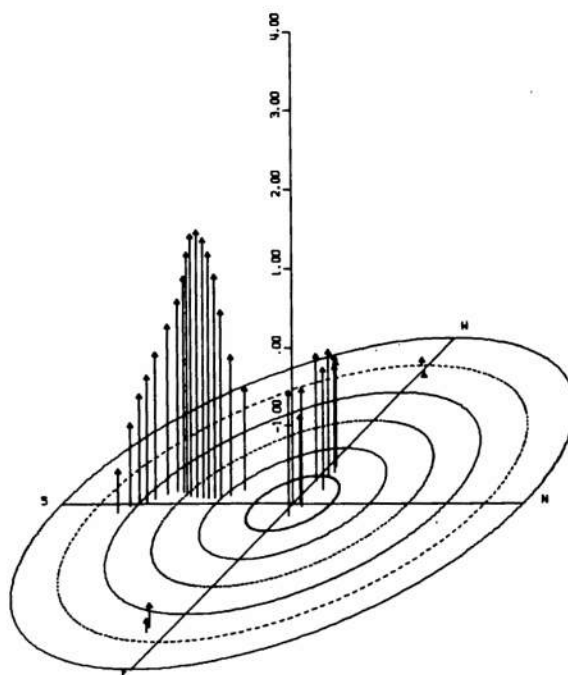
DATE05/04/65 TIME1401-1425 STAGE2 NO113
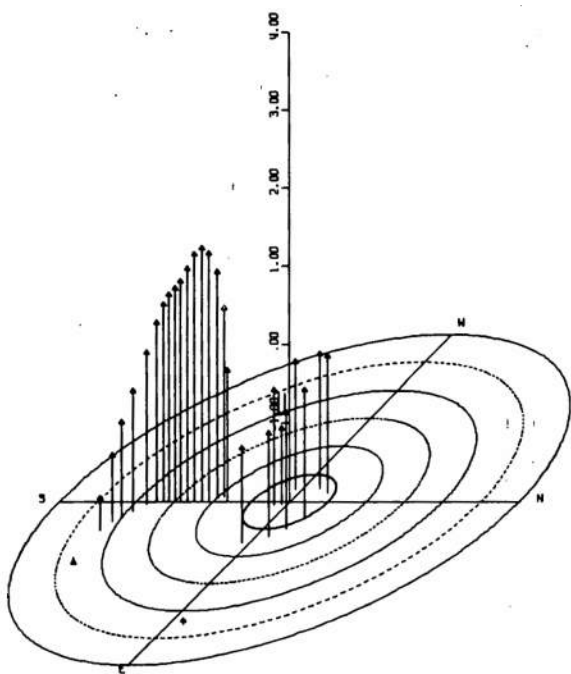
DATE05/07/65 TIME1150-1256 STAGE2 NO120
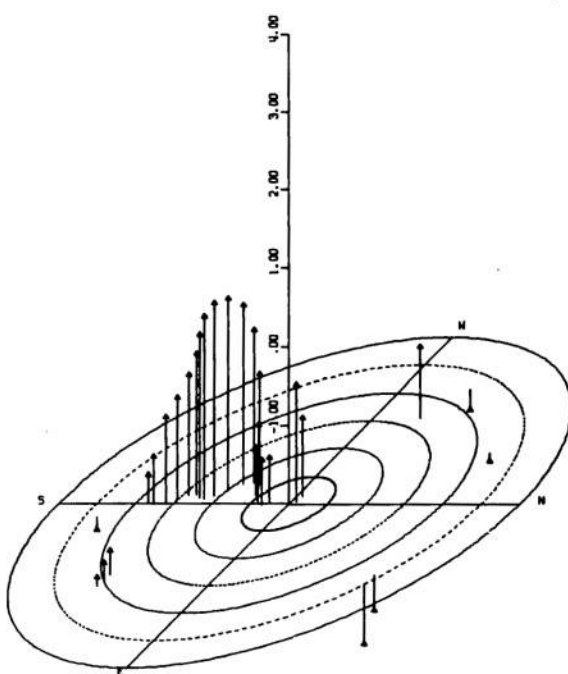
DATE06/01/65 TIME1154-1220 STAGE2 NO165
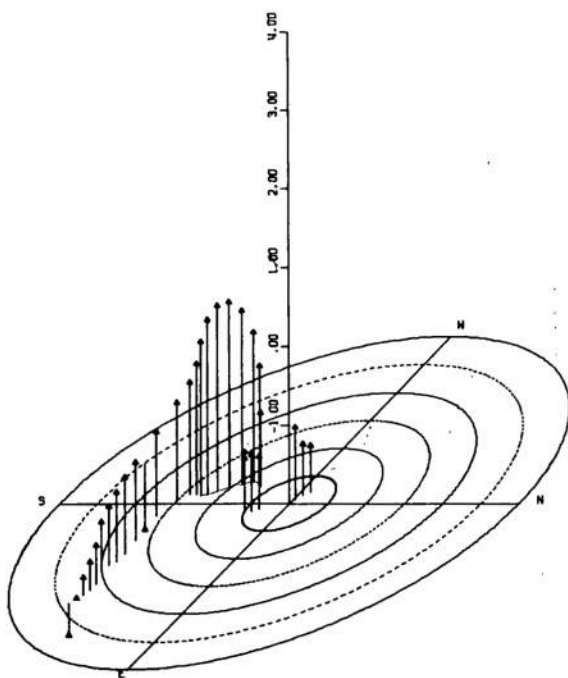
DATE06/01/65TIME1220-1245STAGE2 W0173
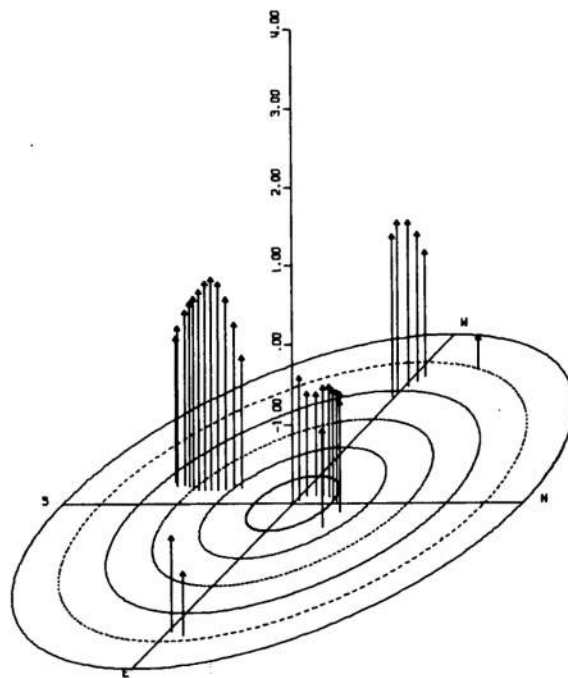
DATE06/04/65 TIME1049-1119 STAGE2 W0250
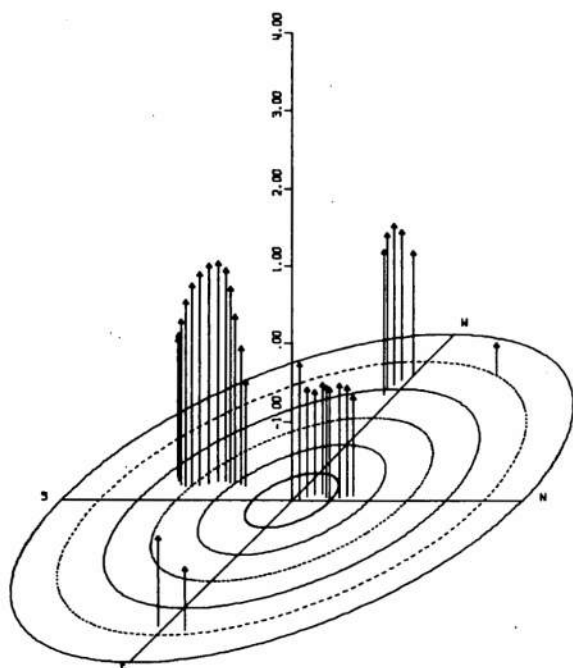
DATE06/04/65 TIME1200-1230 STAGE2 W0285
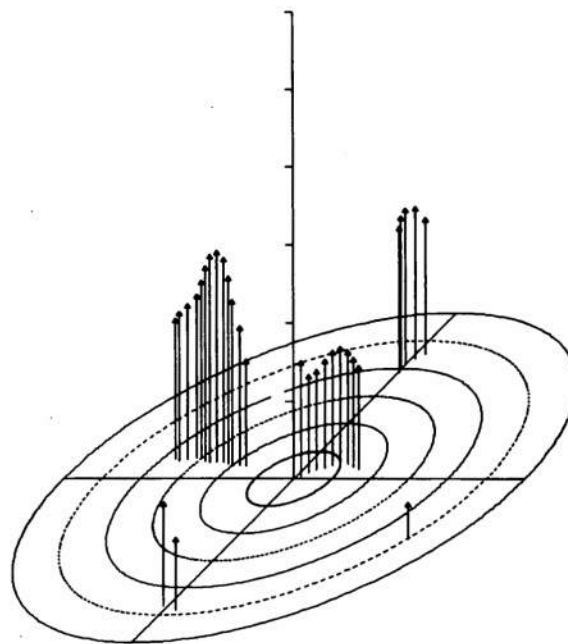
DATE06/04/65 TIME1300-1330 STAGE 2 W0280
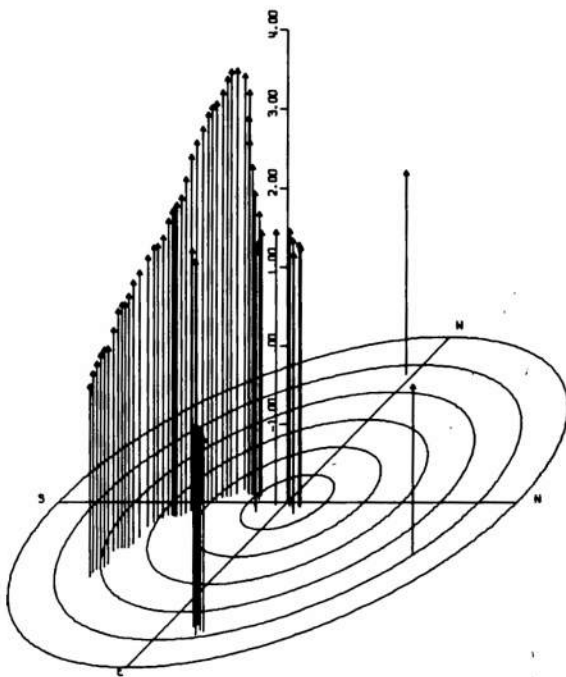
1001-1030 09SEP65 52 WD110 WS29 T31SF1A122-151 RUN14
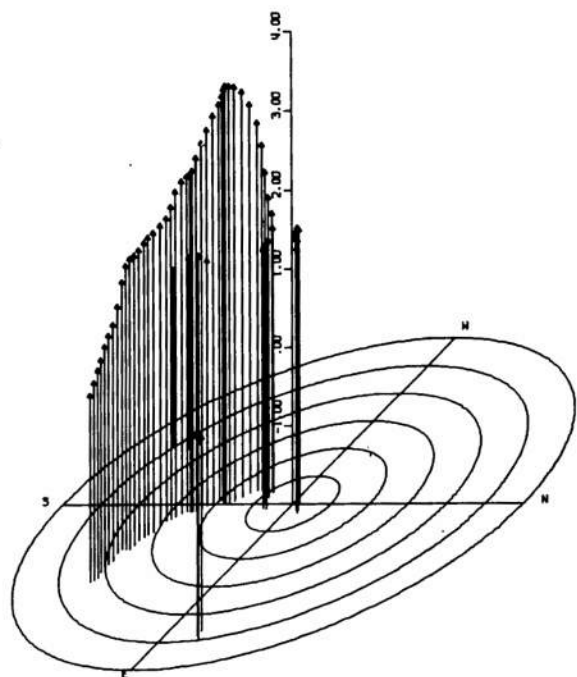
1101-1130 09SEP65 52 WD110 WS34 T31SF1A182-211 RUN15
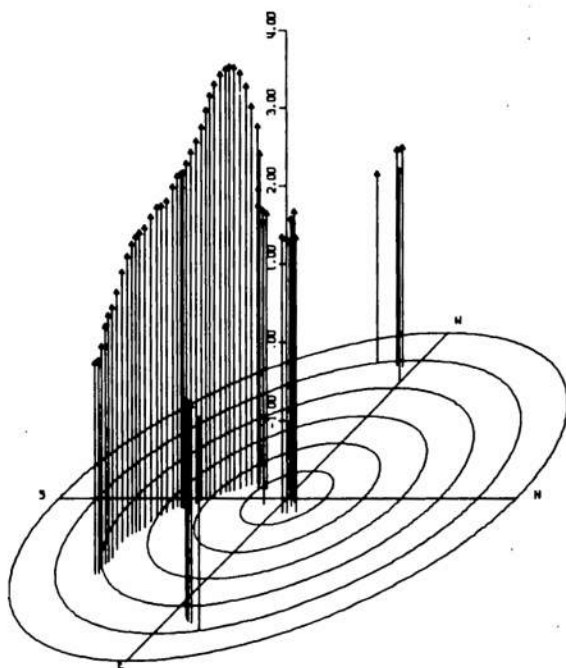
1201-1230 09SEP65 52 WD173 WS30 T31SF1A242-271 RUN16
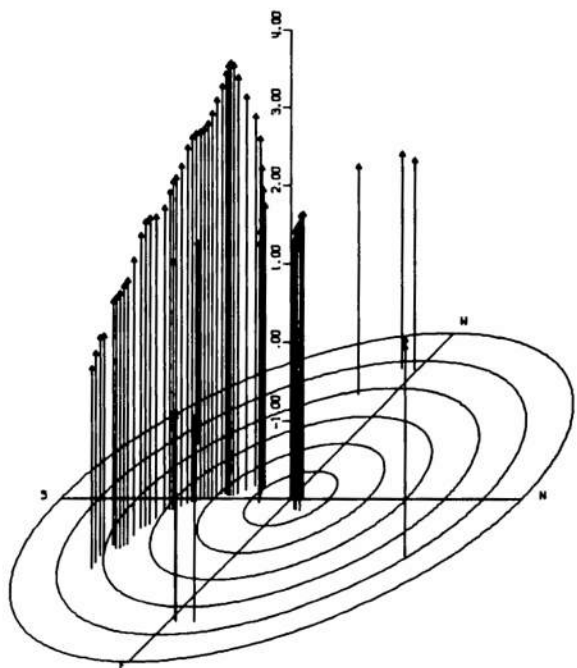
1301-1330 09SEP65 52 WD120 WS35 T31SF1A302-331 RUN17

APPENDIX B

A FORTRAN II PROGRAM FOR SINGLE-WAVE TRAIN ANALYSIS

The FORTRAN II listing of an IBM 704 program for the least square
single-wave train analysis of a spectral matrix obtained from an array
of ocean wave bottom pressure transducers is included. The listing is
from the FORTRAN to ALGOL translator of the Burroughs B-5500 and is
syntax free at the FORTRAN II level. The mathematics of the single-
wave train analysis is described in the body of this report. The data
collection system and calculation of the required cross spectral matrix
is described in Bennett et al (June 1964). The plotter subroutines
GPHPVW and PFB3D are also included. Bennett (March 1968) describes the
plotting technique in PFB3D which was used to produce the plots in
Appendix A.

```
C LISTING OF AN IBM 704 FORTRAN PROGRAM FOR DIRECTIONAL WAVE ANALYSIS.
C 13350-2 C BENNETT JULY 1967 SWOC 78-301-8210
C       REQUEST-0268
C       LEAST SQUARE SINGLE WAVE TRAIN FIT AFTER MUNK
        DIMENSION ID(11),FQ(100),WN(100),PERIOD(100),WAVLGH(100),THMAX(100
       X),DEPATN(100),AVEP(100),P(100,6,6),EMAX(100),TEM(146)
        DIMENSION D(6,6),PSI(6,6),E(100,72),THETA(72),DE(73),THZRO(146),
       XH(100),H1(100),H2(100) ,GOOD(6)
        DIMENSION DATA (1000)
        E2TEN=0.43429448
        TWOPI=6.281853
        RTD=57.29578
        DTR=0.0174532925
        FIV=0.087266465
        REWIND 3
        REWIND 9
        CALL PLOTS(DATA(1000),1000)
        CALL PLOT(0.0,-30.0,-3)
        CALL PLOT(2.5,2.5,-3)
        DO 5 I=1,72
        ZI=(I-1)*5
      5 THETA(I)=ZI*DTR
```

```
      DO 10 I=1,6
      DO 10 J=1,6
      D(I,J)=0.0
   10 PSI(I,J)=0.0
      D(1,2)=100.0
      D(1,3)=100.0
      D(1,4)=100.0
      D(1,5)=100.0
      D(1,6)=100.0
      D(2,3)=117.558
      D(2,4)=190.212
      D(2,5)=190.212
      D(2,6)=117.558
      D(3,4)=117.558
      D(3,5)=190.212
      D(3,6)=190.212
      D(4,5)=117.558
      D(4,6)=190.212
      D(5,6)=117.558
C     PSI IS TRIG ANGLE
C     D IS DISTANCE
      PSI(1,2)=0.0
      PSI(1,3)=72.0*DTR
      PSI(1,4)=144.0*DTR
```

```
              PSI(1,5)=216.0*DTR

              PSI(1,6)=288.0*DTR

              PSI(2,3)=126.0*DTR

              PSI(2,4)=162.0*DTR

              PSI(2,5)=198.0*DTR

              PSI(2,6)=234.0*DTR

              PSI(3,4)=198.0*DTR

              PSI(3,5)=234.0*DTR

              PSI(3,6)=270.*DTR

              PSI(4,5)=270.0*DTR

              PSI(4,6)=306.0*DTR

              PSI(5,6)=342.0*DTR
C        GOOD(I)= 1 FOR USABLE CHANNEL DATA AND 0 FOR BAD CHANNEL
      15 READ 2, ISKIP   ,(GOOD(I),I=1,6)
       2 FORMAT(I2 ,6F1.0 )
         IF(ISKIP)100,30,20
      20 DO 25 I=1,ISKIP
         READ TAPE 3,ID,FQ(1),WN(1),M,K
         IF(K)21,22,21
      21 PAUSE 20202
C        TAPE OUT OF PHASE WITH DATA READ DESIRED
         GO TO 15
      22 MP=M+1
         DO 23 L=2,MP
```

```
   23 READ TAPE 3
   25 CONTINUE
      GO TO 15
C     FQ(1)=0.0 CAN NOT BE MEANINGLYFULLY PROCESSED
   30 READ TAPE 3,IO,FQ(1),WN(1),M,K
      IF(K)21,31,21
   31 MP=M+1
      DO 32 L=2,MP
   32 READ TAPE 3,IO,FQ(L),WN(L),M,K,DELTAT,DEPTH,PERIOD(L),WAVLGH(L),
     XDEPATN(L),AVEP(L),((P(L,I,J),J=1,6),I=1,6)
C     P(L,I,J)=-0.0 IF CHANNEL I OR J IS NO GOOD
C     WN(L) IS WAVE NUMBER=2PI/WAVE LENGTH IN FEET
C     PI=3.1415927...
C     VALUE K NO LONGER NEEDED
      GOODCH=0.0
      DO 40 I=1,6
      GOOD(I)=GOOD(I)*P(2,I,I)
      IF(GOOD(I))41,40,41
   41 GOODCH=GOODCH+1.0
      GOOD(I)=1.0
   40 CONTINUE
      TERMS=1.0+(GOODCH*(GOODCH-1.0))
      DO 70 L=2,MP
      SUM=0.0
```

```
      DO 50 I=1,6
      IF(GOOD(I))51,50,51
   51 SUM=SUM+P(L,I,I)
   50 CONTINUE
      AVEP(L)=SUM/GOODCH
      DO 60 K=1,72
      SUM=0.0
      DO 90 I= 1,5
      IF(GOOD(I) )90,90,91
   91 IP = I+1
      DO 95 J= IP,6
      IF(GOOD(J) )95,95,92
   92 SUM = SUM+P(L,I,J)*COSF(WN(L)*D(I,J)*COSF(THETA(K)-PSI(I,J)))
     X          -P(L,J,I)*SINF(WN(L)*D(I,J)*COSF(THETA(K)-PSI(I,J)))
   95 CONTINUE
   90 CONTINUE
   60 E(L,K)=(AVEP(L)+2.0*SUM)/TERMS
      IF(SENSE SWITCH 1)62,63
   62 PRINT6,FQ(L),AVEP(L),(ID(I),I=1,11),(E(L,K),K=1,72)
    6 FORMAT(1X,1PE11.4,1PE12.4,11A6/(10(1X,1PE11.4)))
   63 G=0.1/DTR
C     DELTA THETA=5DEG OR H=1/2*DEL THETA
      DE(1)=G*(E(L,2)-E(L,72))
      DE(72)=G*(E(L,1)-E(L,71))
```

```
      DO 61 ITHETA=2,71
61 DE(ITHETA)=G*(E(L,ITHETA+1)-E(L,ITHETA-1))
      DE(73)=DE(1)
      K=1
      DO 65 I=1,72
      IF(DE(I)*DE(I+1))66,67,65
66 ZI=I-1
C     FIV IS 5 DEG IN RADIANS
      THZRO(K)=FIV*(ZI+(DE(I)/(DE(I)-DE(I+1))))
      K=K+1
      GO TO 65
67 IF(DE(I))68,69,68
69 THZRO(K)=FIV*FLOATF(I-1)
      K=K+1
68 IF(DE(I+1))65,64,65
64 THZRO(K)=FIV*FLOATF(I)
      K=K+1
65 CONTINUE
      NZEROS=K-1
      DO 75 K=1,NZEROS
C     TERMS SAME AS ABOVE
      SUM=0.0
      DO 76 I=1,5
      IF(GOOD(I) )76,76,77
```

```fortran
   77 IP=I+1
      DO 79 J=IP,6
      IF(GOOD(J) )79,79,78
   78 SUM = SUM+P(L,I,J)*COSF(WN(L)*D(I,J)*COSF(THZRO(K)-PSI(I,J)))
     X           -P(L,J,I)*SINF(WN(L)*D(I,J)*COSF(THZRO(K)-PSI(I,J)))
   79 CONTINUE
   76 CONTINUE
   75 TEM(K)=(AVEP(L)+2.0*SUM)/TERMS
      EMAX(L)=TEM(1)
      THMAX(L)=RTD*(TWOPI-THZRO(1))
      DO 74 K=2,NZEROS
      IF(EMAX(L)-TEM(K))73,74,74
   73 EMAX(L)=TEM(K)
      THMAX(L)=RTD*(TWOPI-THZRO(K))
C     THMAX IS BEARING FROM MAGNITIC NORTH
   74 CONTINUE
      SUM=0.0
      DO 80 I=1,5
      IF(GOOD(I) )80,80,81
   81 IP=I+1
      DO 83 J=IP,6
      IF(GOOD(J) )83,83,82
   82 SUM=SUM+P(L,I,J)*P(L,I,J)+P(L,J,I)*P(L,J,I)
   83 CONTINUE
```

```
   80 CONTINUE
      SSQ=AVEP(L)*AVEP(L)+2.0*SUM
      H(L)=SSQ-TERMS*EMAX(L)*EMAX(L)
      ATILDA=AVEP(L)/TWOPI
      HTILDA=SSQ-ATILDA*ATILDA*TERMS
      H1(L)=1.0-(H(L)/HTILDA)
      H2(L)=(EMAX(L)-ATILDA)/(AVEP(L)-ATILDA)
      IF(SENSE SWITCH 1)99,70
   99 PRINT7, TERMS,EMAX(L),ATILDA,HTILDA
    7 FORMAT(1X,F5.1,1P3E11.4 )
   70 CONTINUE
      PRINT 3,(ID(I),I=1,11)  ,(GOOD(I),I=1,6),M
    3 FORMAT(1H1,39HLEAST SQUARE SINGLE WAVE TRAIN FIT OF  ,11A6/
     X1X,6F2.0,2X,2HM=I3//
     X3X,9HFREQUENCY,5X,6HPERIOD,3X,11HWAVE LENGTH,1X,11HATTENUATION,4X,
     X5HAVE P,8X,1HA,10X,5HBRNG ,8X,1HH,12X,2HH1,10X,2HH2)
      PRINT 4,(FQ(L),PERIOD(L),WAVLGH(L),DEPATN(L),AVEP(L),EMAX(L),
     XTHMAX(L),H(L),H1(L),H2(L),L=2,MP)
    4 FORMAT(1X,0PF11.7,3X,0PF9.5,1X,0PF11.4,1X,1PE11.4,
     X 1X,1PE11.4,1X,1PE11.4,3X,0PF7.2,3X,1PE11.4,4X,0PF6.3,6X,0PF6.3 )
      DO 110 L=2,MP
      AVEP(L)=E2TEN*LOGF(ABSF(AVEP(L)))
      EMAX(L)=E2TEN*LOGF(ABSF(EMAX(L)))
  110 WAVLGH(L)=EMAX(L)-E2TEN*LOGF(ABSF(DEPATN(L)))
```

```fortran
      AVEP(1)=AVEP(2)
      EMAX(1)=EMAX(2)
      WAVLGH(1)=WAVLGH(2)
      CALL SYMBOL(2.0,0.75,0.1,14HWAVE TRAIN.FN=     ,0.0,14)
      CALL NUMBER(3.5,0.75,0.1,FQ(MP),0.0,2)
      CALL GPHPVW(MP,ID,AVEP,EMAX,WAVLGH)
C     WAVLGH IS SURFACE WAVE STAFF SPECTRUM EST FROM BOTTOM PRESSURE.
C     AVE=P  EMAX=V   WAVLGH=W  ON THE PLOTS.
      ZM=M
      NP=DELTAT*ZM*0.5+1.0
      DELX=0.0
      DO 115 I=1,6
      CALL NUMBER(DELX,0.1,0.1,GOOD(I),0.0,-1)
  115 DELX=DELX+0.1
      CALL PFB3D(NP,ID,EMAX,FQ,THMAX)
      GO TO 15
  100 REWIND 3
      CALL EXIT
      PAUSE 70707
      GO TO 15
C     END(0,1,1,0,1)
      END
```

```
      SUBROUTINE GPHPVW(L,ID,ZLOGP,ZLOGV,ZLOGW)
C     SPECIAL FORM OF GPHPVW FOR 13350-2 AUGUST 1967
      DIMENSION ZLOGP(2),ZLOGV(2),ZLOGW(2),ID(2)
      CALL PLOT(0.0,0.0,3)
      CALL PLOT (0.0,10.5,2)
      CALL PLOT (8.0,10.5,2)
      CALL PLOT (8.0,0.0,2)
      CALL PLOT (0.0,0.0,2)
      CALL PLOT (2.0,1.5,-3)
      CALL SYMBOL (0.0,-1.0,-.1,ID(1),0.0,66)
      CALL AXIS (0.0,0.0,20HNORMALIZED FREQUENCY,-20,5.0,0.0,0.0,0.2)
      ZMAX=ZLOGP(1)
      DO 10 I=2,L
      COMPAR=ZLOGP(I)
   10 ZMAX=MAX1F(ZMAX,COMPAR)
      MAX=ZMAX+3.0
      BE=MAX-8
      CALL AXIS(0.0,0.0,17HLOG POWER DENSITY,17,8.0,90.0,BE,1.0)
      DX=5.0/FLOATF(L-1)
      Y=ZLOGP(1)-BE
      X=0.0
      CALL PLOT(X,Y,3)
```

```
      DO 20 I=2,L

      X=X+DX

      Y=ZLOGP(I)-BE

20    CALL PLOT (X,Y,2)

      CALL SYMBOL(X,Y,0.1,1HP,0.0,1)

      X=5.0

      Y=ZLOGV(L)-BE

      CALL SYMBOL(X,Y,0.1,1HA,0.0,1)

      CALL PLOT(X,Y,3)

      M=L-1

      DO 21 I=1,M

      X=X-DX

      II=L-I

      Y=ZLOGV(II)-BE

21    CALL PLOT(X,Y,2)

      WMAX=MAX

      X=0.0

      Y=ZLOGW(1)-BE

      CALL PLOT(X,Y,3)

      DO 22 I=2,L

      X=X+DX

      IF(ZLUGW(I)-WMAX)24,23,23

23    Y=8.0

      GO TO 22
```

```
24 Y=ZLOGW(I)-BE
22 CALL PLOT(X,Y,2)
   CALL SYMBOL(X,Y,0.1,1HS,0.0,1)
   IF (SENSE LIGHT 1)40,30
30 CALL PLOT (-2.0,9.0,-3)
   SENSE LIGHT 1
   GO TO 50
40 CALL PLOT (6.0,-12.0,-3)
50 RETURN
C  END(0,1,1,0,0)
   END
```

FORTRAN TO ALGOL TRANSLATOR
PHASE 1   FORTRAN STATEMENTS

```
      SUBROUTINE PF93D(N,ID,P,R,B)
C     P=FUNCTION OF R = POWER DENSITY
C     B= FUNCTION OF R = COMPASS BEARING
C     R= FREQUENCY IN HZ
      DIMENSION ID(2),P(2),R(2),B(2),C(360),S(360)
      T=10.0
      D=0.70710678
      OTH=0.017453293
C     OTH IS ONE DEGREEE IN RADIANS IE RADIANS PER 1 DEGREE
      A=0.0
      DO 10 I=1,360
      A=A+OTH
      C(I)=COSF(A)
   10 S(I)=SINF(A)
      CALL PLOT(0.0,0.0,3)
      CALL PLOT(0.0,10.5,2)
      CALL PLOT(8.0,10.5,2)
      CALL PLOT(8.0,0.0,2)
      CALL PLOT(0.0,0.0,2)
      CALL SYMBOL(1.0,0.5,-0.1,ID(1),0.0,66)
      CALL PLOT(4.0,3.5,-3)
      CALL PLOT(3.0,0.0,2)
```

```
      CALL SYMBOL(3.25,0.0,0.1,1HN ,0.0,1)
      CALL AXIS(0.0,1.0,0H ,0,5.0,90.0,-1.0,1.0)
      CALL PLOT(0.0,1.0,3)
      CALL PLOT(0.0,0.0,2)
      CALL PLOT(-3.0,0.0,2)
      CALL SYMBOL(-3.26,0.0,0.1,1HS ,0.0,1)
      X=-3.0*D
      Y=X
      CALL SYMBOL(X-0.1,Y-0.1,0.1,1HE ,0.0,1)
      CALL PLOT(X,Y,3)
      CALL PLOT(-X,-Y,2)
      CALL SYMBOL(0.1-X,0.1-Y,0.1,1HW ,0.0,1)
      CALL PLOT(0.0,0.0,-3)
      DO 20 I=1,6
      A=0.5*FLOATF(I)
      CALL PLOT(A,0.0,3)
      DO 30 J=1,360
      Y=A*S(J)*D
      X=A*C(J) + Y
   30 CALL PLOT(X,Y,2)
   20 CONTINUE
      CALL PLOT(0.0,0.0,-3)
      D=10.0*D
C     10*D NEEDED TO SCALE 0.0-0.3 TO 0-3 INCHES ON PLOTS
```

```
      DO 40 I=2,N

      RAD=DTH*B(I)

      Y=R(I)*D*SINF(-RAD)

      X=R(I)*T*COSF(RAD) + Y

      IUD=3

      CALL PLOT(X,Y,IUD)

      AY=P(I) + Y + 1.96

C     2 IS NOT ADDED SO TOP SYMBOL WILL BE THE REFERENCE IN .08 SYMBOL

      CALL PLOT(X,AY,2)

      CALL SYMBOL(X,AY,0.08,2,0.0,-2)

      CALL PLOT(X,AY,3)

40    CALL PLOT(X,Y,2)

      IF(SENSE LIGHT 1)41,42

42    CALL PLOT(-4.0,7.0,-3)

      SENSE LIGHT 1

      GO TO 50

41    CALL PLOT(4.0,-14.0,-3)

50    RETURN

C     END(0,1,1,0,1)

      END
```

APPENDIX C

A FORTRAN PROGRAM FOR ITERATIVE WAVE TRAIN ANALYSIS

The FORTRAN listing of a Burroughs B-5500 program for the iterative least square multiple wave train analysis of a spectral matrix is presented. The mathematics is an iterative utilization of the single wave train analysis described in the body of this report. Following the single wave train analysis of the measured spectral matrix the resulting values of single wave train power, A, and wave bearing, θ, are used to find the spectral matrix that would occur for such a wave. Details for this are given in Section 5 of this report. From the above, a residual measured spectral matrix is formed by subtracting a fractional portion of the single wave spectral matrix from the previously used spectral matrix. The residual spectral matrix is then single wave train analyzed. The above procedure is continued iteratively until a specified number of iterations have been completed or the residual spectral matrix total power gets smaller than a specified value. Table C1 shows numerical results for several frequencies. Figure C1 is a plot of the bearing, θ, and the ratio of A to the total power available in the original measure spectral matrix for the frequency band 0.00833 to 0.24187 Hz. The iteration parameters were set for a maximum of five iterations, a residual power ratio of 0.1, and a fractional portion value of 0.1. Both results are for data collected for task SWOC at Stage II between 1220 and 1249 hours on 4 June 1965. The wind speed was 12 knots from a bearing of 280 degrees. In Table C1 A, H, and bearing are as previously defined. AVE P is the average $C_{11}(f)$ for the residual spectral matrix and P is the AVE P for the first iteration; i.e., the original measured average power. The H1 and H2 values are measures of the isotropicity of the energy represented by the residual spectral matrix. H1 compares the least square value of H with the value H' that would have been obtained if the wave energy were isotropic:

$$H1 = 1 - (H/H') .$$

H2 compares the power A of a single wave fit to the total power, AVE P, and the value A' that would have been obtained for isotropic energy:

$$H2 = (A-A')/(AVE P-A') .$$

Both H1 and H2 are between 0 and 1, the lower limit is for the isotropic case and the upper for a plane wave from a single direction.

SOME NUMERICAL RESULTS OF ITERATIVE DIRECTIONAL ANALYSIS

ITERATION	A	AVE P	BEARING	A/P	H	H1	H2
FREQUENCY 0.058333							
1	2.7023E-01	4.5520E-01	4.59	0.594	7.0425E-01	0.749	0.517
2	2.4821E-01	4.2817E-01	4.59	0.534	7.0425E-01	0.706	0.486
3	2.1849E-01	4.0385E-01	4.59	0.481	7.0425E-01	0.658	0.455
4	1.9710E-01	3.8196E-01	4.59	0.433	7.0425E-01	0.607	0.424
5	1.7720E-01	3.6226E-01	54.19	0.394	6.8325E-01	0.556	0.399
FREQUENCY 0.066667							
1	2.3521E-01	4.6936E-01	11.05	0.503	7.8311E-01	0.665	0.409
2	2.1259E-01	4.4572E-01	11.05	0.453	7.8311E-01	0.614	0.378
3	1.9133E-01	4.2466E-01	11.05	0.408	7.8311E-01	0.559	0.347
4	1.7219E-01	4.0533E-01	11.04	0.367	7.8311E-01	0.502	0.316
5	1.5715E-01	3.9811E-01	56.13	0.335	7.5205E-01	0.459	0.292
FREQUENCY 0.075000							
1	1.5456E-01	4.6426E-01	5.29	0.342	7.7033E-01	0.442	0.217
2	1.4270E-01	4.4840E-01	5.29	0.307	7.7033E-01	0.331	0.189
3	1.2443E-01	4.3413E-01	5.29	0.277	7.7033E-01	0.320	0.163
4	1.1559E-01	4.2129E-01	10.43	0.249	7.7032E-01	0.263	0.137
5	1.0755E-01	4.0973E-01	194.55	0.236	7.3312E-01	0.247	0.129
FREQUENCY 0.083333							
1	2.0211E-01	5.5432E-01	193.72	0.365	7.2767E-01	0.585	0.244
2	1.8190E-01	5.3411E-01	193.72	0.323	7.2767E-01	0.524	0.216
3	1.6371E-01	5.1522E-01	193.72	0.295	7.2767E-01	0.461	0.185
4	1.4734E-01	4.2955E-01	193.72	0.266	7.2767E-01	0.326	0.161
5	1.3260E-01	4.3411E-01	193.72	0.239	7.2767E-01	0.331	0.136
FREQUENCY 0.091667							
1	4.7266E-01	9.1547E-01	192.42	0.524	9.7927E-01	0.869	0.434
2	4.3170E-01	8.6750E-01	192.42	0.472	9.7927E-01	0.841	0.403
3	3.8853E-01	8.2433E-01	192.42	0.424	9.7927E-01	0.809	0.371
4	3.4767E-01	7.4546E-01	192.42	0.382	9.7927E-01	0.771	0.340
5	3.1471E-01	7.5051E-01	192.42	0.344	9.7927E-01	0.729	0.309
FREQUENCY 0.100000							
1	1.2352E 00	1.8886E 00	192.65	0.654	3.1192E 00	0.934	0.589
2	1.111/E 00	1.7649E 00	192.65	0.589	3.1192E 00	0.920	0.560
3	1.0005E 00	1.6517E 00	192.65	0.539	3.1192E 00	0.903	0.530
4	9.0047E-01	1.5537E 00	192.65	0.477	3.1192E 00	0.882	0.500
5	8.1042E-01	1.4635E 00	192.65	0.429	3.1192E 00	0.857	0.469

C-2
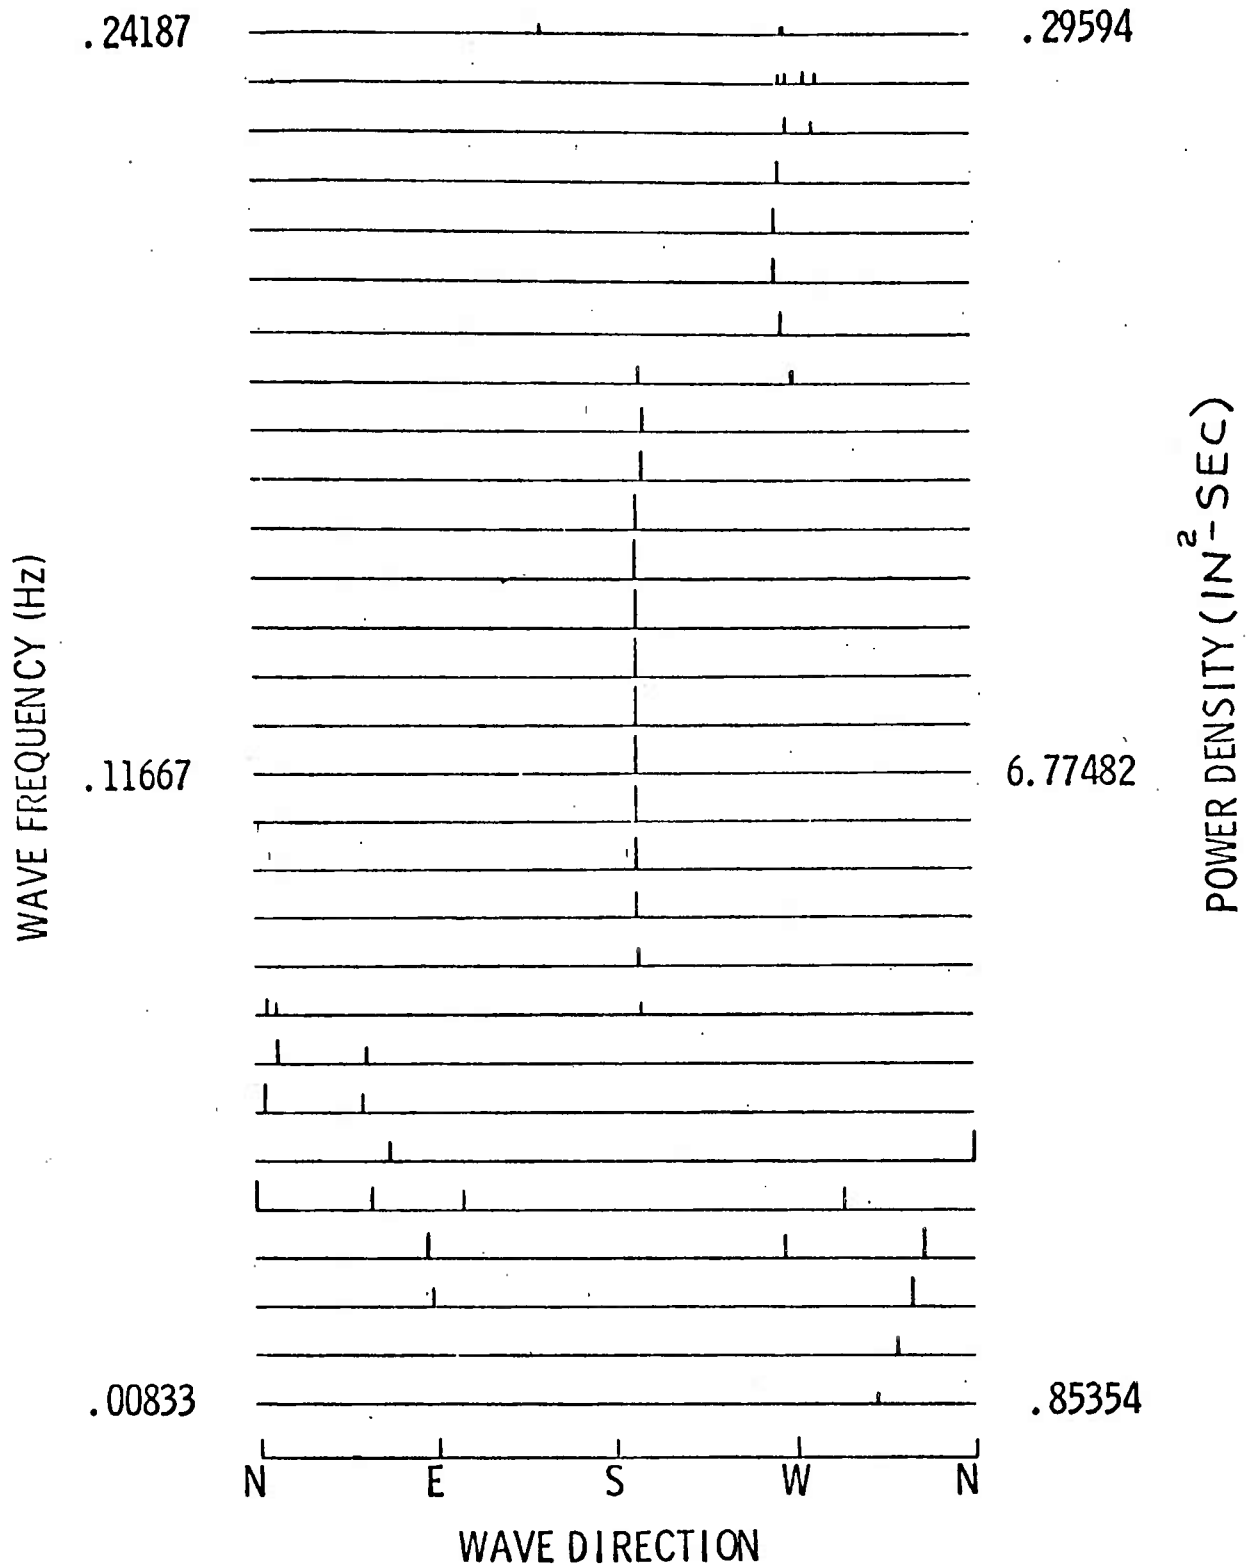
FIGURE C1. ITERATIVE LEAST SQUARE WAVE FIT DIRECTIONAL ANALYSIS

TABLE C2

```
B 5700   FORTRAN   COMPILATION   XIII.411.

FILE  3=FORSWGC/EDITC,SAVE=30,LOCK,RECORD=64                              00000000
FILE  6=F1335,UNIT=READER,RECORD=10                                       00000100
FILE  9=FORP/INP,SAVE=30                                                  00000200
C     SWGCFOR/F1335: ITERATION OF MULTIPLE WAVE TRAIN FIT FOR AN          00000300
C     INTERVAL OF FREQUENCY BINS, BY CARL M BENNETT MARCH 1972.           00000400
C     BASED ON ANALYSIS BY ITERATION OF LEAST SQUARE WAVE TRAIN FIT       00000500
C     AFTER MUNK,MILLER,SNODGRASS,AND BARBER  APRIL 1963                  00000600
                                                          START OF SEGMENT
      DIMENSION  ID(11),FQ(100),WN(100), P(100,6,6),TEM(146),TH/RU(146),  00000700
     1    D(6,6),PST(6,6),E(72),THETA(6),DE(72),DE(73),GOOD(6),           00000800
     2    CONTRL(8),HCD(12)                                               00000900
      DIMENSION  PERIOD(100),WAVLGH(100),DEPATN(100),AVP(100)             00001000
      DATA CONTRL / 484CC EXECUTE SWGCPLT/PLOT ;END,574321202 01 CMH  /   00001100
      TWOPI=6.281853                                                      00001200
      RTD=57.29578                                                        00001300
      DTR=0.0174532225                                                    00001400
      FIV=0.08726465                                                      00001500
      CALL PLOT(2,0,30.0,-3)                                              00001600
C     SET PLOTTER ORIGIN TO THE LEFT                                      00001700
      DO 5 I=1,72                                                         00001800
      ZI=(I-1)*5                                                          00001900
    5 THETA(I)=ZI*DTR                                                     00002000
      DO 10 I=1,6                                                         00002100
      DO 10 J=1,6                                                         00002200
      D(I,J)=0.0                                                          00002300
   10 PSI(I,J)=0.0                                                        00002400
      D(1,2)=100.0                                                        00002500
      D(1,3)=100.0                                                        00002600
      D(1,4)=100.0                                                        00002700
      D(1,5)=100.0                                                        00002800
      D(1,6)=100.0                                                        00002900
      D(2,3)=117.558                                                      00003000
      D(2,4)=190.212                                                      00003100
      D(2,5)=190.212                                                      00003200
      D(2,6)=117.558                                                      00003300
      D(3,4)=117.558                                                      00003400
      D(3,5)=190.212                                                      00003500
      D(3,6)=190.212                                                      00003600
      D(4,5)=117.558                                                      00003700
      D(4,6)=190.212                                                      00003800
      D(5,6)=117.558                                                      00003900
C     PSI IS TRIG ANGLE                                                   00004000
C     D IS DISTANCE                                                       00004100
      PSI(1,2)=0.0                                                        00004200
                                                                          00004300
```

```
      PSI(1,3)=72.0*DTR                                                00004400
      PSI(1,4)=144.0*DTR                                               00004500
      PSI(1,5)=216.0*DTR                                               00004600
      PSI(1,6)=288.0*DTR                                               00004700
      PSI(2,3)=126.0*DTR                                               00004800
      PSI(2,4)=162.0*DTR                                               00004900
      PSI(2,5)=198.0*DTR                                               00005100
      PSI(2,6)=234.0*DTR                                               00005200
      PSI(3,4)=198.0*DTR                                               00005300
      PSI(3,5)=234.0*DTR                                               00005400
      PSI(3,6)=270.0*DTR                                               00005500
      PSI(4,5)=270.0*DTR                                               00005600
      PSI(4,6)=306.0*DTR                                               00005700
      PSI(5,6)=342.0*DTR                                               00005800
C     GOOD(I)= 1 FOR USABLE CHANNEL DATA AND 0 FOR BAD CHANNEL         00005900
      READ(6,2) (GOOD(I),I=1,6),LF,MF,MAXITR,RATIO,PERCENT,DXFQ        00006000
    2 FORMAT(6F1.0,3I6,3F6.0)                                          00006100
      CLOSE 6                                                          00006200
      IF ( DXFQ .LT.  0.2 ) DXFQ = 0.2                                 00006300
      DXP=2.0*DXFQ                                                     00006400
      READ (3)   ID,FQ(1),WN(1),M,K                                   00006500
C                                                                      00006600
      MP=M+1                                                           00006700
      DO 32 L=2,MP                                                     00006800
   32 READ (3)  ID,FQ(L),WN(L),M,K,DELTAT,DEPTH,PERIOD(L),WAVLGH(L),   00006900
     1 DEPATN(L),AVP(L),((P(L,I,J),J=1,6),I=1,6)                       00007000
      CLOSE 3                                                          00007100
C     PCL,I,J)=-0.0 IF CHANNEL I OR J IS NO GOOD                       00007200
C     WN(L) IS WAVE NUMBER=2PI/WAVE LENGTH IN FEET                     00007300
      PI=3.1415927...                                                  00007400
C     VALUE K NO LONGER NEEDED                                         00007500
      GOODCH=0.0                                                       00007600
      DO 40 I=1,6                                                      00007700
      GOOD(I)=GOOD(I)*P(2,I,I)                                         00007900
      IF(GOOD(I))41,40,41                                              00008000
   41 GOODCH=GOODCH+1.0                                                00008100
      GOOD(I)=1.0                                                      00008200
   40 CONTINUE                                                         00008300
      TERMS=1.0+(GOODCH*(GOODCH-1.0))                                  00008400
C     AXIS AND LABEL FOR BEARING VS FREQUENCY PLOT OF (EMAX,THMAX).    00008500
      DELY=-0.2                                                        00008600
      DO 42 I=1,6                                                      00008700
   42 DELY=DELY-0.1                                                    00008800
      CALL NUMBER(0.1,DELY,0.07,GOOD(I),-90.0,-1)                      00008900
      CALL SYMBOL(0.5,-1.25,0.14,ID(1),-90.0,60)                       00009000
      CALL SYMBOL(0.5,-9.63,0.14,ID(11),-90.0,6)
      BCO(I)="WAVE D"
```

```
      BCD(2)="THETA"                                                    00009100
      BCD(3)="MIN "                                                     00009200
      CALL SYMBUL(1.0 ,-4.0,0.14,BCD(1),-90.0,14)                       00009300
      CALL PLOT(1.5,-1.75,-3)                                           00009400
      CALL PLOT(-0.1,0.0,2)                                             00009500
      CALL PLOT( 0.0,0.0,2)                                             00009600
      CALL PLOT( 0.0,-1.8,2)                                            00009700
      CALL PLOT(-0.1,-1.8,2)                                            00009800
      CALL PLOT( 0.0,-1.8,2)                                            00009900
      CALL PLOT(-0.1,-3.6,2)                                            00010000
      CALL PLOT( 0.0,-3.6,2)                                            00010100
      CALL PLOT( 0.0,-5.4,2)                                            00010200
      CALL PLOT(-0.1,-5.4,2)                                            00010300
      CALL PLOT( 0.0,-5.4,2)                                            00010400
      CALL PLOT( 0.0,-7.2,2)                                            00010500
      CALL PLOT(-0.1,-7.2,2)                                            00010600
      BCD(1)="N"                                                        00010700
      CALL SYMBUL(-0.25,-7.1,0.14,BCD(1),-90.0,1)                       00010800
      BCD(1)="W"                                                        00010900
      CALL SYMBUL(-0.25,-5.3,0.14,BCD(1),-90.0,1)                       00011000
      BCD(1)="S"                                                        00011100
      CALL SYMBUL(-0.25,-3.5,0.14,BCD(1),-90.0,1)                       00011200
      BCD(1)="E"                                                        00011300
      CALL SYMBUL(-0.25,-1.7,0.14,BCD(1),-90.0,1)                       00011400
      BCD(1)="N"                                                        00011500
      CALL SYMBUL(-0.25, 0.1,0.14,BCD(1),-90.0,1)                       00011600
      BCD(1)= "WAVE F"                                                  00011700
      BCD(2)= "REQUEN"                                                  00011800
      BCD(3)= "CY(HZ)"                                                  00011900
      CALL SYMBUL(5.0,1.0,0.14,BCD(1),0.0,18)                           00012000
      BCD(1)="POWER ";BCD(2)="DENSIT";BCD(3)="Y          "              00012100
      CALL SYMBUL(5.0,-8.75,0.14,BCD(1),0.0,13)                         00012200
      PRINT 8,(ID(I),I=1,11),(GDD(I),I=1,6),MAXITR,RATIO,FQ(LF),FQ(MF)  00012300
    8 FORMAT(" ITERATIVE LEAST SQUARE MULTIPLE WAVE TRAIN FIT OF ",11A6/00012400
     1 1X,6F2.0," MAXIMUM ITERATION=",I4," MINIMUM RATIO=",F7.3,1X,      00012500
     2 "FREQUENCY RANGE (",2F9.6,")" , ," PERCENT=",F7.3)                00012600
      DO 70 L=LF,MF                                                     00012700
      ITR=0                                                             00012800
      PRINT 9, FQ(L)                                                    00012900
    9 FORMAT(" FREQUENCY ITERATION      A",11X,"WAVE P      BEARING   ", 00013000
     1 " A/P                  H2"/(1X,F9.6))                            00013100
  700 SUM=0.0; ITR= ITR +1; IF(ITR .GT. MAXITR) GO TO 70               00013200
      DO 50 I=1,6                                                       00013300
      IF(GDDD(I))51,50,51                                               00013400
   51 SUM=SUM+D(L,I,I)                                                  00013500
```

TABLE C2 (CONTINUED)

```
50  CONTINUE                                                            00013800
    AVEP=SUM/GOODCH                                                     00013900
    IF( AVEP .LE. 0) GO TO 70                                           00014000
    IF(ITR .NE. 1) GO TO 600                                           00014100
    PMAX=AVEP                                                           00014200
       CALL PLOT(DXFD,0.0,-3)                                          00014300
       CALL NUMBER(0.0,0.8,0.07,FD(L),-90.0, 5)                       00014400
    CALL PLOT(0.0,0.0,3) ; CALL PLOT(0.0,-7.2,2)                       00014500
       CALL NUMBER(0.0,-7.5,0.07,PMAX,-90.0, 5)                       00014600
600 CONTINUE                                                            00014700
    DO 60 K=1,72                                                        00014800
    SUM=0.0                                                             00014900
    DO 90 I= 1,5                                                        00015000
    IF(GOOD(I) )90,90,91                                               00015100
91  IP = I+1                                                            00015200
    DO 95 J= IP,6                                                       00015300
    IF(GOOD(J) )95,95,92                                               00015400
92  SUM = SUM+P(L,I,J)*COS(WN(L)*D(I,J)*COS(THETA(K)-PSI(I,J)))        00015500
X                 -P(L,J,I)*SIN(WN(L)*D(I,J)*COS(THETA(K)-PSI(I,J)))   00015600
95  CONTINUE                                                            00015700
90  CONTINUE                                                            00015800
60  E(K)=(AVEP + 2.0*SUM)/TERMS                                        00015900
62  G=0.1/DTR                                                           00016000
C   DELTA THETA=5DEG OR H=1/2*DEL THETA                                00016100
    DE(1)=G*(E( 2)-E( 72))                                             00016200
    DE(72)=G*(E( 1)-E( 71))                                            00016300
    DO 61 ITHETA=2,71                                                   00016400
61  DE(ITHETA)=G*(E( ITHETA+1)-E( ITHETA-1))                          00016500
    DE(73)=DE(1)                                                        00016600
    K=1                                                                 00016700
    DO 65 I=1,72                                                        00016800
    IF(DE(I)*DE(I+1))66,67,65                                          00016900
66  ZI=I-1                                                              00017000
C   FIV IS 5 DEG IN RADIANS                                            00017100
    THZRO(K)=FIV*(ZI+(DE(I)/(DE(I)-DE(I+1))))                         00017200
    K=K+1                                                               00017300
    GO TO 65                                                            00017400
67  IF(DE(I))68,69,68                                                  00017500
69  THZRO(K)=FIV*FLOAT(I-1)                                            00017600
    K=K+1                                                               00017700
68  IF(DE(I+1))65,64,65                                                00017800
64  THZRO(K)=FIV*FLOAT(I)                                              00017900
    K=K+1                                                               00018000
65  CONTINUE                                                            00018100
    NZEROS=K-1                                                          00018200
    DO 75 K=1,NZEROS                                                    00018300
C   TERMS SAME AS ABOVE                                                00018400
```

TABLE C2 (CONTINUED)

```
        SUM=0.0
        DO 75 I=1,5
        IF(GROJD(I) )76,76,77
77      IP=I+1
        DO 79 J=IP,6
        IF(GROJD(J) )79,79,78
78      SUM = SUM+P(L,I,J)*CDS(WN(L)*P(I,J)*COS(TH/ZRO(K)-PSI(I,J)))
X           -P(L,J,I)*SIN(WN(L)*P(I,J)*COS(TH/ZRO(K)-PSI(I,J)))
79      CONTINUE
76      CONTINUE
75      TEM(K)=(AVEP + 2.0*SUM)/TERMS
        EMAX = TEM(1)
        ROMAX = THZRO(1)
C       TRIG TO COMPASS CONVERSION OF THETA
        THMAX = RTD*(TWOPI-THZRO(1))
        DO 74 K=2,NZEROS
        IF(EMAX-TEM(K))73,74,74
73      EMAX = TEM(K)
        ROMAX = THZRO(K)
        THMAX = RTD *(TWOPI-THZRO(K))
C       THMAX IS BEARING FROM MAGNITIC NORTH
74      CONTINUE
        TEST = EMAX/PMAX
        SUM=0.0
        DO 80 I=1,5
        IF(GROJD(I) )80,80,81
81      IP=I+1
        DO 83 J=IP,6
        IF(GROJD(J) )83,83,82
82      SUM=SUM+P(L,I,J)**2*(L,I,J)+P(L,J,I)*P(L,J,I)
83      CONTINUE
80      CONTINUE
        SSQ = AVEP * AVEP + 2.0*SUM
        H = SSQ -TERMS* PMAX*EMAX
        ATILDA = AVEP/TWOPI
        HTILDA=SSQ-ATILDA*ATILDA*TERMS
        H1 = 1.0 -(H /HTILDA)
        H2 = (EMAX-ATILDA)/(AVEP-ATILDA)
        Y = -7.2 * (THMAX/ 360.0): X = TEST * DXFQ
        CALL PLOT(0.,Y,3); CALL PLOT(X,Y,2)
C
        PRINT 7, ITR, EMAX, AVEP , THMAX , TEST , H , H1 ,H2
7       FORMAT( 14X, I4,5X,1PE11.4,1PE11.4,1PE13.4,1PE13.4,0PF9.2,F8.3,1PE12.4,0P2F(,3)
        IF(TEST ,LT, RATIO) GD TO 70
        DO 710 I=1,6
        IF(GROJD(I) .NE. 0) P(L,I,J) = P(L,I,J) - (EMAX* PERCENT)
710     CONTINUE
```

(right column line numbers)

```
00018500
00018600
00018700
00018800
00018900
00019000
00019100
00019200
00019300
00019400
00019500
00019600
00019700
00019800
00019900
00020000
00020100
00020200
00020300
00020400
00020500
00020600
00020700
00020800
00020900
00021000
00021100
00021200
00021300
00021400
00021500
00021600
00021700
00021800
00021900
00022000
00022100
00022200
00022300
00022400
00022500
00022600
00022700
00022800
00022900
00023000
00023100
```

TABLE C2 (CONTINUED)

```
      DO 730 I= 1,5 ;IF(GOOD(I) .EQ. 0) GO TO 730        00023200
      IP = I+1                                            00023300
      DO 720 J= IP,6; IF(GOOD(J) .EQ. 0) GO TO 720        00023400
      P(L,I,J) = P(L,I,J) - (PERCENT *(EMAX* COS(WN(L)*D(I,J)*  00023500
     1                     COS(RDMAX - PSI(I,J))))        00023600
      P(L,J,I)= P(L,J,I) + (PERCENT *(EMAX* SIN(WN(L)*D(I,J)*   00023700
     1                     COS(RDMAX - PSI(I,J))))        00023800
                                        START OF SEGMENT   SEGMENT
  720 CONTINUE                                            00023900
  730 CONTINUE                                            00024000
      GO TO 700                                           00024100
   70 CONTINUE                                            00024200
  100     CALL PLOT(0,0,999)                              00024300
      CLOSE 9                                             00024400
      CALL ZIP ( CONTRL)                                  00024500
      STOP                                                00024600
      END                                                 00024700
                                                          00024800
                                                          SEGMENT
```

DOCUMENT CONTROL DATA · R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY *(Corporate author)*	2a. REPORT SECURITY CLASSIFICATION
Naval Coastal Systems Laboratory	UNCLASSIFIED
Panama City, Florida 32401	2b. GROUP ---

3. REPORT TITLE

THE DIRECTIONAL ANALYSIS OF OCEAN WAVES: AN INTRODUCTORY DISCUSSION

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*
Informal

5. AUTHOR(S) *(First name, middle initial, last name)*

Carl M. Bennett

6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
December 1972	83	12

8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S)
b. PROJECT NO.	NCSL 144-72
c. Task SWOC SR 004 03 01, Task 0582	9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)*
d. ZR 000 01 01 (0401-40)	First Edition NSRDL/PC 3472

10. DISTRIBUTION STATEMENT

Approved for Public Release; Distribution Unlimited.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
Second edition. This report was originally issued in September 1971 as NSRDL/PC Report 3472.	Commander Naval Ship Systems Command (00V1K)

13. ABSTRACT

An introductory discussion of the mathematics behind the directional analysis of ocean waves is presented. There is sufficient detail for a reader interested in applying the methods; further, the report can serve as an entry into the theory. The presentation is basically tutorial but does require a reasonably advanced mathematical background. Results of a program for the measurement of directional ocean wave bottom pressure spectra are included as an appendix. This second edition makes corrections to the first and adds some details of an iterative directional analysis method.

DD FORM **1473**
I NOV 65

KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Ocean waves						
Spectrum analysis						
Fourier analysis						
Matrix methods						
Convariance						
Bibliographies						
IDENTIFIERS						
Cross spectral analysis						
Directional analysis						
SWOC (Shallow Water Oceanography)						
Ocean bottom pressure data						

INITIAL DISTRIBUTION
NCSL 144-72

000100	Chief of Naval Material	
	(MAT-03L4)	(Copy 1)
000400	Commander, Naval Ship Systems Command	
	(SHIPS 00V1K)	(Copies 2-4)
	(SHIPS 2052)	(Copies 5-6)
	(SHIPS 03542)	(Copy 7)
000500	Commander, Naval Ship Engineering Center	(Copy 8)
003100	Assistant Secretary of the Navy	(Copy 9)
005600	Chief of Naval Research	
	(ONR 410)	(Copy 10)
	(ONR 414)	(Copy 11)
	(ONR 420)	(Copy 12)
	(ONR 438)	(Copy 13)
	(ONR 460T)	(Copy 14)
	(ONR 461)	(Copy 15)
	(ONR 462)	(Copy 16)
	(ONR 463)	(Copy 17)
	(ONR 466)	(Copy 18)
	(ONR 468)	(Copy 19)
028900	Director, Office of Naval Research (Boston)	(Copy 20)
029000	Director, Office of Naval Research (Chicago)	(Copy 21)
029100	Director, Office of Naval Research (Pasadena)	(Copy 22)
028500	Oceanographer of the Navy	(Copies 23-24)
021000	Commander, Naval Oceanographic Office	(Copies 25-26)
023900	Commander, Naval Ship Research and Development Center	
	(Code 561)	(Copies 27-29)
	(Code 01)	(Copy 30)
	(Code 01B)	(Copy 31)
027200	Commander, Naval Weapons Center, China Lake	(Copy 32)
015900	Commander, Naval Air Development Center	(Copy 33)
019800	Commander, Naval Electronics Laboratory Center, San Diego	(Copies 34-35)
026900	Commander, Naval Undersea Center, San Diego	(Copy 36)
	(Dr. Robert H. Riffenburg)	(Copy 37)
	(Dr. W. J. MacIntire)	(Copy 38)
018800	Commanding Officer, Naval Civil Engineering Laboratory	(Copy 39)
021200	Commander, Naval Ordnance Laboratory	(Copy 40)
028100	Officer in Charge, New London Laboratory, NUSC	(Copy 41)
036100	Officer in Charge, Annapolis Laboratory, NSRDC	(Copy 42)

022600	Director, Naval Research Laboratory	
	(ONR 481)	(Copy 43)
	(ONR 483)	(Copy 44)
	(ONR 102 OS)	(Copy 45)
	Ocean Sciences Division (NRL)	(Copy 46)
	Library (NRL)	(Copy 47)
029600	Commander, Pacific Missile Range	(Copy 48)
027900	Officer in Charge, Environmental Prediction Research Facility	(Copy 49)
015600	Superintendent, Naval Academy	(Copy 50)
	(Professor Paul R. Van Mater, Jr.)	(Copy 51)
022500	Superintendent, Naval Postgraduate School	(Copy 52)
002700	Army Research, Office of the Chief of Research and Development, Dept. of the Army	(Copy 53)
002500	Director, Army Engineers Waterways Experiment Station	(Copy 54)
002300	Army Coastal Engineering Laboratory	(Copy 55)
014900	District Engineer, Mobile District Corps of Engineers	
	(W. W. Burdin)	(Copy 56)
007900	Director of Defense, Research and Engineering	
	(Ocean Control)	(Copy 57)
015400	Director, National Oceanographic Data Center	(Copies 58-59)
000600	Director, Advanced Research Projects Agency	(Copy 60)
	(Nuclear Test Detection Office)	(Copy 61)
	(Dr. R. W. Slocum)	(Copy 62)
028600	Chief, Oceanographic Branch, CERC	(Copy 63)
	(Dr. D. Lee Harris)	(Copy 64)
	(Dr. Cyril J. Galvin, Jr.)	(Copy 65)
034700	Director, Woods Hole Oceanographic Inst.	(Copy 66)
	(Dr. John C. Beckerle)	(Copy 67)
	(Dr. N. N. Panicker)	(Copy 68)
015300	National Oceanic & Atmospheric Administration, U. S. Department of Commerce	(Copy 69)
	(Dr. Moe Ringenbach)	(Copy 70)
009600	Environmental Science Services Administration U. S. Department of Commerce	(Copy 71)
013400	Chief, Marine Science Center, Coastal Geodetic Survey, U.S. Dept. of Commerce	(Copy 72)
004200	Director, Bureau of Commercial Fisheries, U. S. Fish and Wildlife Service	(Copy 73)
000700	Allan Hancock Foundation	(Copy 74)
010700	Gulf Coast Research Laboratory, Ocean Springs	(Copy 75)
012300	Director, Lamont-Doherty Geological Observatory, Columbia University, Palisades	(Copies 76-77)
	(Dr. Arnold L. Gordon)	(Copy 78)
	(Dr. Leonard E. Alsop)	(Copy 79)
	(Dr. John E. Nafe)	(Copy 80)

	(Dr. Keith McCamy)	(Copy 81)
	(Dr. John T. Kuo)	(Copy 82)
	(Dr. Tom Herron)	(Copy 83)
	(Dr. Manik Talwani)	(Copy 84)
030700	Director, Scripps Institute of Oceanography, University of California	(Copy 85)
	(Dr. Walter H. Munk)	(Copy 86)
	(Dr. D. L. Inman)	(Copy 87)
	(John D. Isaacs)	(Copy 88)
008500	Department of Geotechnical Engineering, Cornell University	(Copy 89)
008700	Department of Oceanography, Florida Institute of Technology	(Copy 90)
008800	Department of Oceanography, Florida State University	
	(Dr. K. Warsh)	(Copy 91)
008200	Chairman, Department of Coastal Engineering, University of Florida	(Copy 92)
031800	University of West Florida	
	(Dr. A. Chaet)	(Copy 93)
009200	Department of Physics, Georgia Southern College	
	(Dr. Arthur Woodrum)	(Copy 94)
011800	Institute of Geophysics, University of Hawaii	(Copy 95)
009300	Division of Engineering and Applied Physics, Harvard University, Cambridge	(Copy 96)
004900	Director, Chesapeake Bay Institute, Johns Hopkins University	(Copy 97)
	(W. Stanley Wilson)	(Copy 98)
031200	Officer in Charge, Applied Physics Laboratory, Johns Hopkins University	(Copy 99)
013500	Director, Marine Science Center, Lehigh Univ.	(Copy 100)
005700	Coastal Studies Institute, Louisiana State University	(Copies 101-102)
012000	Institute of Marine Sciences, University of Miami	
	(Dr. W. Duing)	(Copy 103)
010600	Great Lakes Research Division, University of Michigan	(Copy 104)
008600	Department of Meteorology and Oceanography, New York University	(Copy 105)
009500	Environmental Science Center, Nova University	
	(Dr. W. S. Richardson)	(Copy 106)
008900	Head, Department of Oceanography, Oregon State University	(Copy 107)
029900	Pell Marine Science Library, University of Rhode Island	(Copy 108)

009100	Department of Oceanography and Meteorology, Texas A&M University	(Copies 109-110)
002000	Applied Physics Laboratory, University of Washington	(Copy 111)
009000	Head, Department of Oceanography, University of Washington	(Copy 112)
010500	Chairman, Department of Oceanography, University of South Florida	(Copy 113)
015200	National Institute of Oceanography, Wormley, Godalming, Surrey, England	
	(Director)	(Copy 114)
	(J. Ewing)	(Copy 115)
	(Dr. L. Draper)	(Copy 116)
011700	Institute fur Meereskunde Under Universitat, West Germany	
	(Dr. Wolfgang Krauss)	(Copy 117)
	(Dr. F. Schott)	(Copy 118)
007700	Director, Defense Documentation Center	(Copies 119-130)

Dr. William P. Raney, Special Assistant for Research, Navy Department, Washington, D.C. 20350 (Copy 131)

National Oceanic and Atmospheric Administration, Boulder, Colorado 80302
(Earth Sciences Lab) (Copy 132)
(Wave Propagation Lab) (Copy 133)

Director, National Weather Service, NOAA, 8060 13th Street, Silver Spring, MD 20910 (Copy 134)
(Dr. William Kline, Sys Dev O) (Copy 135)

Director, National Ocean Survey, NOAA, Rockville, MD 20852 (Copy 136)

Director, Pacific Marine Laboratory, NOAA Seattle, Washington 98102 (Copy 137)

Earthquake Mechanism Laboratory, NOAA, 390 Main Street, San Francisco, CA 94105 (Copy 138)

Ports and Waterways Staff, Office of Marine Environment and Systems, U. S. Coast Guard Headquarters, 400 7th St., SW, Washington, D.C. 20591 (Copy 139)

Director, National Center for Earthquake Research, U. S. Geological Survey, Menlo Park, CA 94025 (Copy 140)

Director, Seismological Laboratory, California Institute of Technology, Pasadena, CA 91109 (Copy 141)

Director, Seismic Data Laboratory, Geotech-
Teledyne, 314 Montgomery St., Alexandria, VA
22314   (Copy 142)

Director, Thomas J. Watson Research Center,
Yorktown Heights, NY 10598   (Copy 143)

Director, Institute for Storm Research,
Houston, TX 77006   (Copy 144)

The Offshore Company, P.O. Box 2765, Houston,
TX 77001
      (Crane E. Zumwalt)   (Copy 145)

Tetra Tech, Inc., 630 N. Rosemead Blvd.,
Pasadena, CA 91107
      (Dr. J. I. Collins)   (Copy 146)
      (Dr. Bernard LeMehaute)   (Copy 147)

Director, Geophysical Institute, University
of Alaska, College Br., Fairbanks,
Alaska 99701   (Copy 148)

Chairman, Department of Geological Sciences,
Brown University, Providence, RI 02912   (Copy 149)

Chairman, Dept. of Geophysics, University
of California, Berkeley, CA 94720   (Copy 150)

Director, Institute of Geophysics and Planetary
Physics, University of California, Los
Angeles, CA 90024   (Copy 151)

Director, Institute of Geophysics and Planetary
Physics, University of California, Riverside,
CA 92502   (Copy 152)

University of California, Hydraulic
Engineering Division, Berkeley, CA 94720
      (Dr. R. L. Wiegel)   (Copy 153)

Chairman, Division of Fluid, Thermal, Aerospace
Sciences, Case Western Reserve University,
Cleveland, Ohio 44106   (Copy 154)

Central Michigan University, Brooks Science Hall,
Box 12, Mt. Pleasant, MI 48858
      (Dr. Kenneth Uglum)   (Copy 155)

Chairman, Department of Geophysical Sciences
The University of Chicago, Chicago IL 60637   (Copy 156)

Columbia University, Dept. of Physics, New
York City, NY 10027
      (Dr. Gerald Feinberg)   (Copy 157)

Columbia University, 202 Haskell Hall, BASR,
605 W. 115th St., New York City, NY 10025
    (Dr. Alan G. Hill)   (Copy 158)

Chairman, Department of Geological Sciences,
Cornell University, Ithaca, NY 14850   (Copy 159)

Chairman, College of Marine Studies, Univ.
of Delaware, Newark, DE 19711   (Copy 160)

Chairman, Dept. of Oceanography, Duke Univ.,
Durham, NC 27706   (Copy 161)

Geophysical Fluid Dynamics Institute, Florida
State University, Tallahassee, FL 32306
    (Dr. Ivan Tolstoy)   (Copy 162)
    (Dr. Joe Lau)   (Copy 163)

Chairman, Center for Earth and Planetary
Physics, Harvard University, Cambridge,
MA 02138   (Copy 164)

University of Hawaii, Department of Ocean
Engineering, Honolulu, Hawaii 96822
    (Dr. Charles L. Bretschneider)   (Copy 165)

University of Idaho, Department of Physics,
Moscow, Idaho 83843
    (Dr. Michael E. Browne)   (Copy 166)

University of Iowa, Institute of Hydraulic
Research, Iowa City, Iowa 52240
    (Dr. Hunter Rouse)   (Copy 167)

Chairman, Department of Earth and Planetary
Sciences, Johns Hopkins University, Baltimore,
MD 21218   (Copy 168)

Chairman, Department of Earth and Planetary
Sciences, Massachusetts Institute of Technology,
Boston, MA 02139   (Copy 169)

Massachusetts Institute of Technology, Dept.
of Naval Architecture and Marine Engineering,
Boston, MA 02139
    (Attn: Dr. J. N. Newman)   (Copy 170)

Division of Physical Oceanography, School of
Marine and Atmospheric Science, University of
Miami, 10 Rickenbacker Causeway, Miami,
FL 33149
    (Dr. Christopher N. K. Mooers)   (Copy 171)
    (Dr. Claes Rooth)   (Copy 172)

Chairman, Department of Natural Science,
Michigan State University, East Lansing,
MI 48823   (Copy 173)

New York University, Institute of Mathematical
Sciences, New York City, NY 10003
       (Dr. J. J. Stoker)   (Copy 174)

Chairman, Dept. of Geosciences, North Carolina
State University, Raleigh, NC 27607   (Copy 175)

Chairman, Institute of Oceanography, Old
Dominion University, Norfolk, VA 23508   (Copy 176)

Chairman, Department of Geosciences, Geophysics
Section, The Pennsylvania State University,
University Park, PA 16802   (Copy 177)

Chairman, Dept. of Earth and Planetary Sciences,
University of Pittsburg, Pittsburg, PA 15213   (Copy 178)

Chairman, Dept. of Geological and Geophysical
Sciences, Princeton, New Jersey 08540   (Copy 179)

University of Rhode Island, Graduate School
of Oceanography, Kingston, RI 02881
       (Dr. Kern Kenyon)   (Copy 180)

Chairman, Dept. of Geology, Rice University,
Houston, TX 77001   (Copy 181)

Chairman, Dept. of Earth and Atmospheric
Sciences, St. Louis University, St. Louis,
MO 63103   (Copy 182)

Director, Dallas Geophysical Laboratory,
Southern Methodist Univ., Dallas, TX 75222   (Copy 183)

Director, Center for Radar Astronomy,
Stanford University, Stanford, CA 94305   (Copy 184)

Chairman, Department of Geophysics, Stanford
University, Stanford, CA 94305   (Copy 185)

Chairman, Dept. of Geological Sciences,
University of Texas, Austin, TX 78712   (Copy 186)

Chairman, Dept. of Geological and Geophysical
Sciences, University of Utah, Salt Lake
City, Utah 84112   (Copy 187)

Director, Marine Research Laboratory, University
of Wisconsin, Madison, WI 53706   (Copy 188)

University of Wisconsin, Center for Great
Lakes Studies, Milwaukee, WI 53201
       (Dr. David L. Cutchin)   (Copy 189)

Chairman, Dept. of Geology and Geophysics,
Yale University, New Haven, CT 06520   (Copy 190)

Director, Navy Hydrographic Office, Buenos
Aires, Argentina   (Copy 191)

Chairman, Department of Geophysics and
Geochemistry, Australian National University,
Canberra, 2600, Australia   (Copy 192)

Monash University, Geophysical Fluid Dynamics
Lab., Clayton, Victoria, Australia 3168
     (Dr. B. R. Morton)   (Copy 193)

Flinders University of South Australia, Horace
Lamb Center for Oceanographic Research,
Bedford Park, Adeleide, South Australia
5042
     (Prof. Bye)   (Copy 194)

Chairman, Dept. of Oceanography, Dalhousie
University, Halifax, Nova Scotia, Canada   (Copy 195)

Director, Geophysics Laboratory, University
of Toronto, Toronto, Canada   (Copy 196)

Director, Institute of Earth and Planetary
Physics, University of Alberta, Edmonton 7,
Alberta, Canada   (Copy 197)

Director, Institute of Oceanography, University
of British Columbia, Vancouver 8, British
Columbia, Canada   (Copy 198)

Chairman, Department of Geophysics and
Planetary Physics, The University, Newcastle
Upon Tyne, NE 1 7 RU, England   (Copy 199)

Cambridge University, Madlingley Rise,
Madingley, Cambridge CB3 OEZ, England
     (Dr. M. S. Longuet-Higgins)   (Copy 200)

Chairman, Department of Geodesy and
Geophysics, Cambridge University, Madlingley
Rise, Madingley Road, Cambridge CB3 OEZ
England   (Copy 201)

Director, Institute for Coastal Oceanography
and Tides, Birkenhead, Cheshire, England   (Copy 202)

Director, Oceanographic Research Institute of
the Defense Dept., Kiel, West Germany   (Copy 203)

Abteilung fur Theoretische Geophysik,
Universitat Hamburg, Hamburg, West Germany   (Copy 204)

Institute for Advanced Studies, 64 Merrion
Square, Dublin, Ireland
    (Dr. John Lighton Synge)   (Copy 205)

Director, NATO Saclant ASW Research Centre,
La Spezia, Italy   (Copy 206)

Director, Geophysical Institute, University
of Tokyo, Tokyo, Japan   (Copy 207)

University of Auckland, Dept. of Physics,
Auckland, Dept. of Physics, Auckland, New
Zealand
    (Professor A. C. Kibblewhite)   (Copy 208)

Chairman, Dept. of Marine Science, University
of Puerto Rico, Mayaguez, Puerto Rico 00708   (Copy 209)